


CU2

Wide-ranging rectangular fire damper up to 120'



V K F A E A I

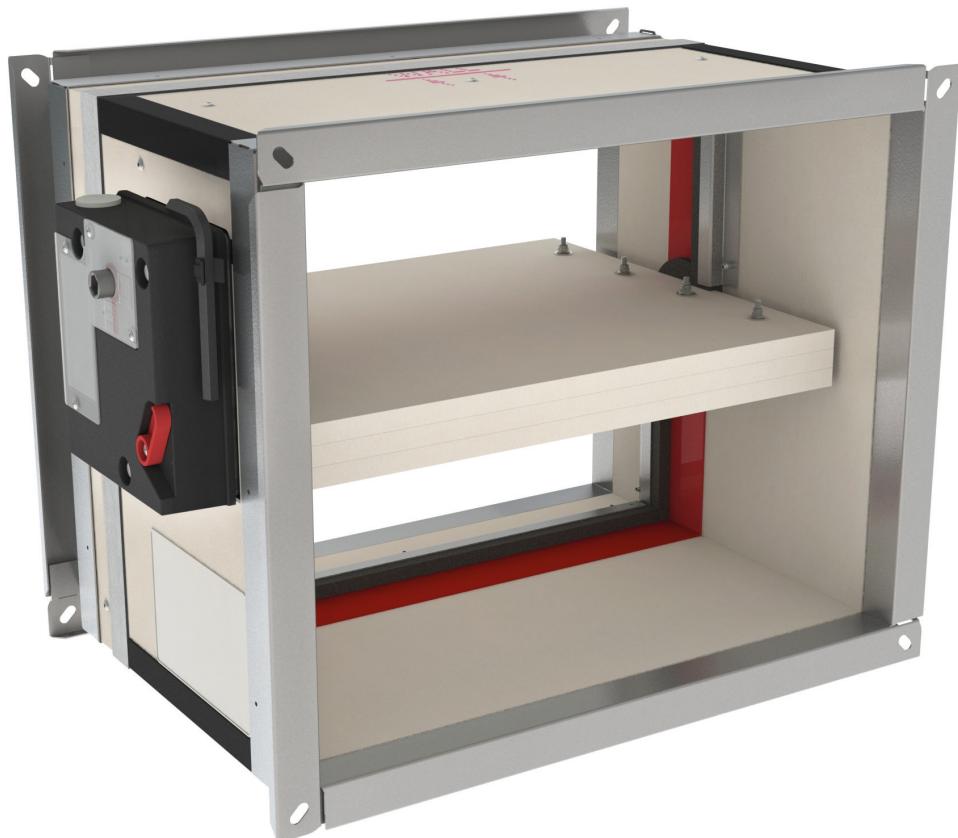

UK
CA



www.rft.eu

Table of content

Table of content

Declaration of performance	4
Product presentation CU2	5
Range and dimensions CU2	6
Variant CU2L	6
Range and dimensions CU2L	6
Variant CU2-L500	7
Range and dimensions CU2-L500	7
Variant CU2 ATEX	7
Range and dimensions CU2 ATEX	8
Variant CU2L ATEX	8
Range and dimensions CU2L ATEX	8
Evolution - kits	9
Options - at the time of order	13
Flange types - at the time of order	14
Storage and handling	15
Installation	15
Installation at a minimal distance from another damper or from an adjacent supporting construction	16
Installation in rigid wall and floor	17
Installation in flexible wall (metal stud gypsum plasterboard wall)	19
Installation in flexible wall (metal stud gypsum plasterboard wall), sealing with gypsum	22
Installation in flexible wall (metal stud gypsum plasterboard wall), sealing with mortar	24
Installation in gypsum block wall	26
Installation in flexible and rigid wall, sealing with rigid stone wool boards with coating	28
Installation remote from the wall, sealing and insulation with rigid stone wool boards with coating	31
Installation in rigid floor, sealing with rigid stone wool boards with coating	34
Installation in shaft wall	36
Operation and mechanisms	37
Electrical connection	44
Weights	46
Selection data	62
Example	62
Sample order	80
Approvals and certificates	80

Explanation of the abbreviations and pictograms

Explanation of the abbreviations and pictograms

Wn = nominal width	E.TELE = power supply magnet	Sn = free air passage
Hn = nominal height	E.ALIM = power supply motor	$\zeta [-]$ = pressure loss coefficient
Dn = nominal diameter	V = volt	Q = airflow
E = integrity	W = watt	ΔP = static pressure drop
I = thermal insulation	Auto = automatic	v = air speed in the duct
S = smoke leakage: max. 200 m ³ /(h m ²) according to EN 1366-2	Tele = remote controlled	Lwa = A-weighted sound power level
Pa = pascal	Pnom = nominal capacity	Lw oct = sound power level per octave midband
ve = vertical wall penetration	Pmax = maximum capacity	dB(A) = A-weighted decibel value
ho = horizontal floor penetration	GKB (type A) / GKF (type F): "GKB" stands for standard plasterboards (type A according to EN 520) while "GKF" plasterboards offer a higher fire resistance for a similar plate thickness (type F according to EN 520)	ΔL = correction factor
o -> i = meets the criteria from the outside (o) to the inside (i)	Cal-Sil = calcium silicate	
i <-> o = fire side not important	OP = option (delivered with the product)	
V AC = Volt alternating current	KIT = kit (delivered separately for repair or upgrade)	
V DC = Volt direct current	PG = connection flange to the duct	

	large dimensions		air tightness in accordance with EN 1751: class ATC 4 (formerly B), class ATC 3 in option (formerly C)
	Hygiene certificate (www.HYG.de)		suitable for built-in installation
	intermediate dimensions on request		minimal distance allowed
	sealing with fire resistant stone wool boards allowed, also for asymmetric opening		ATEX certificate TÜV 14 ATEX 7540 X

Declaration of performance

UKCA_DOP_Rf-t_C2 EN - N-01/05/2025

DECLARATION OF PERFORMANCE

1. Unique identification code of the product type:

CU2 Rectangular fire damper to be used in conjunction with partitions to maintain fire compartments in heating, ventilating and air conditioning installations.

2. Intended use/es:

Rf-Technologies NV, Lange Ambachtstraat 40, B-9860 Oosterzele

System 1

4. System/s of AVCP:

BS EN 15650:2010, BCCA with identification number 0749-2822-UKCA-CPR-0057

5. Designated standard / Approved body/ certificate of constancy of performance:

6. Declared performance according to BS EN 15650-2010

Essential characteristics

Range	Type	Construction	Sealing	Performance
200x200 mm ≤ CL2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Gypsum	Designated standard BS EN 15650:2010
	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	Mortar	El 120 (v _e i ↔ o) S - (500 Pa)
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Galvanised duct + stone wool + coating ≥ 150 kg/m ² 2x50 mm	El 90 (v _e i ↔ o) S - (300 Pa)
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Gypsum	El 90 (v _e i ↔ o) S - (300 Pa)
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Mortar	El 60 (v _e i ↔ o) S - (300 Pa)
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Galvanised duct + stone wool + coating ≥ 150 kg/m ² 2x50 mm	El 60 (v _e i ↔ o) S - (300 Pa)
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Gypsum	El 60 (v _e i ↔ o) S - (300 Pa)
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Mortar	El 120 (v _e i ↔ o) S - (500 Pa)
		Panor System Panel Sandwich Panel type Paroc AST 5 ≥ 100 mm	Galvanised duct + stone wool + coating ≥ 150 kg/m ² 2x50 mm	El 90 (v _e i ↔ o) S - (300 Pa)
		Eurobond sandwich panel system type Eurobond Firemaster Extra ≥ 100 mm	Hilti CFS-CT B TS	El 90 (v _e i ↔ o) S - (300 Pa)
		Gypsum blocks ≥ 100 mm	Hilti CFS-CT B TS	El 90 (v _e i ↔ o) S - (300 Pa)
		Aerated concrete ≥ 150 mm	Block glue	El 120 (v _e i ↔ o) S - (500 Pa)
200x200 mm ≤ CL2 ≤ 1200x800 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar	El 90 (v _e i ↔ o) S - (300 Pa)
	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	Gypsum	El 90 (v _e i ↔ o) S - (300 Pa)
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Stone wool + coating ≥ 140 kg/m ³	El 90 (v _e i ↔ o) S - (300 Pa)
		Gypsum blocks ≥ 70 mm	Stone wool + coating ≥ 140 kg/m ³ + cover plates	El 90 (v _e i ↔ o) S - (300 Pa)
		Aerated concrete ≥ 150 mm	Stone wool + coating ≥ 40 kg/m ³ + cover plates	El 120 (v _e i ↔ o) S - (500 Pa)
		Aerated concrete ≥ 100 mm	Stone wool + coating ≥ 40 kg/m ³ + cover plates	El 60 (v _e i ↔ o) S - (300 Pa)
		Rigid floor	Block glue	El 90 (v _e i ↔ o) S - (300 Pa)
		Rigid wall	Stone wool + coating ≥ 140 kg/m ³	El 120 (v _e i ↔ o) S - (500 Pa)
		Rigid floor	Mortar / Gypsum	El 60 (v _e i ↔ o) S - (300 Pa)
120x800 mm < CL2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar	El 60 (v _e i ↔ o) S - (500 Pa)
< CL2 ≤ 1500x1000 mm	Rigid wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Stone wool ≥ 40 kg/m ³ + cover plates	El 90 (v _e i ↔ o) S - (300 Pa)
< CL2 ≤ 1500x800 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 82.5 mm	Stone wool ≥ 40 kg/m ³ + cover plates	El 120 (v _e i ↔ o) S - (300 Pa)
200x200 mm ≤ CL2 ≤ 1500x800 mm	Asymmetrical flexible wall (shaft wall)	Metal studs gypsum plasterboard Type F (EN 520) ≥ 82.5 mm	Mortar	El 60 (v _e i ↔ o) S - (300 Pa)
	Rigid floor	Aerated concrete ≥ 125 mm	Mortar	El 120 (v _e i ↔ o) S - (300 Pa)
1	Type of installation: built-in 0/180° Minimal distances authorised:	2 	Type of installation: remote from the wall, 0/180° 	3 Type of installation: built-in 0/180° Minimal distances authorised:
4	Type of installation: built-in 0/180°			

Nominal activation conditions/sensitivity:	Pass	Integrity (E)	60, 90 and 120 minutes
Response delay (response time); closure time	Pass	Insulation (EI)	60, 90 and 120 minutes
Operational reliability: cycling	Pass	Smoke leakage (EI-S)	n/a
Durability of response delay:	Pass	Mechanical stability (under E)	n/a
Durability of operational reliability:	Pass	Maintenance of cross section (under E)	n/a
Protection against corrosion according to EN 60068-2-52:	Pass		
Damper casing leakage according to EN 1751:	≥ class ATC 4 (formerly B)		

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Duchan Laplace, R&D Manager

Oosterzele, 01/05/2025



Product presentation CU2

Rectangular fire damper for large dimensions up to 1500 x 1000 mm. The tunnel is made of fireproof moisture-resistant and asbestos-free boards. Fire resistance of up to 120 minutes and numerous options make the CU2 fire damper a universal reference on the market. For maximum dimensions up to 3050 x 1650 mm, please refer to the CE marked battery assembly CU2/B.


Fire dampers are installed where air ducts penetrate fire-resistant compartment walls. Their role is to restore the fire resistance grade of the penetrated wall and to prevent smoke propagation. Fire dampers are distinguished by their degree of fire resistance, by their aerodynamic properties as well as by their installation ease. Rf-Technologies' fire dampers are all CE marked. They can be equipped with various types of mechanisms depending on the specific needs linked to the project or to the local regulations.

- large dimensions
- many options and variants
- model available for use in potentially explosive atmospheres



- suitable for built-in installation
- suitable for installation remote from the wall
- minimal distance allowed
- suitable for rigid wall, rigid floor and light wall (metal stud gypsum plasterboard wall), gypsum blocks and sandwich panel wall
- sealing with fire resistant stone wool boards allowed, also for asymmetric opening
- air tightness in accordance with EN 1751: class ATC 4 (formerly B), class ATC 3 in option (formerly C)
- tested according to EN 1366-2 up to 500 Pa
- operating mechanism outside the wall
- maintenance-free
- for indoor use
- operating temperature: max. 50°C
- intermediate dimensions on request
- Hygiene certificate for CU2: H > 600 or W > 800 (option when ordering)


1. connection flange PG30
2. casing made of refractory material
3. damper blade
4. operating mechanism
5. sealing cold smoke
6. blade bumper
7. intumescence strip
8. transmission with locking (open/closed)
9. fusible link
10. product identification

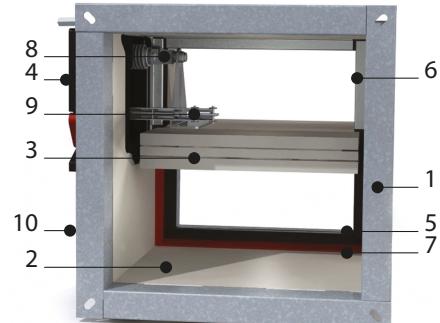

Range and dimensions CU2

Range and dimensions CU2

	\geq	\leq
(W x H) mm	200x200	1500x1000

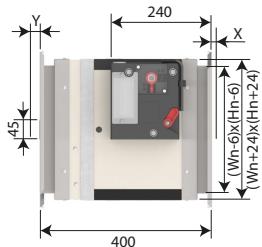

Wn/Hn in steps of 50 mm; intermediate dimensions are subject to extra cost (heights between ≥ 275 and ≤ 299 mm are not possible).

Exceeding blade: X = on the mechanism side, Y = on the wall side


Hn [mm]	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
x	-	-	-	-	-	1	26	51	76	101	126	151	176	201	226
y	2	27	52	77	102	127	152	177	202	227	252	277	302	327	352

Variant CU2L

Damper with a tunnel casing extension at one or both sides so that the damper blade does not exceed the tunnel. This version allows to connect a grill or a bend directly on the damper flange or to use a circular connection.


- extension: a = Hn/2-230 mm (on the side of the mechanism);
b = Hn/2-100 mm (on the wall side)

- connection flange PG30
- casing made of refractory material
- damper blade
- operating mechanism
- sealing cold smoke
- blade bumper
- intumescence strip
- transmission with locking (open/closed)
- fusible link
- product identification
- graphite strip
- wall limit

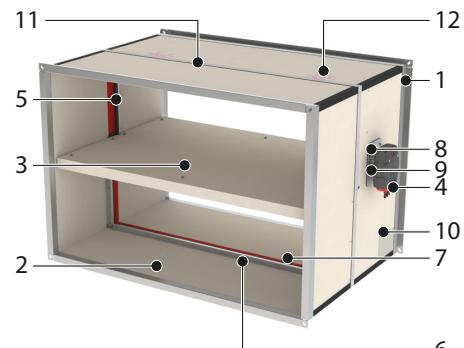

Range and dimensions CU2L

	\geq	\leq
(W x H) mm	200x200	1500x1000

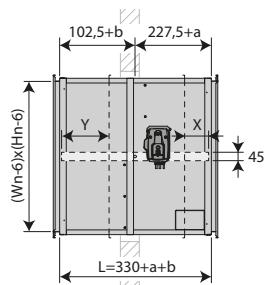

extension: a = Hn/2-230 mm (on the side of the mechanism); b = Hn/2-100 mm (on the wall side)

Variant CU2-L500


CU2 damper with a tunnel casing extension at the wall side to facilitate the connection to the duct when the supporting construction is thicker than 100 mm. This version also ensures that the damper blade doesn't exceed the casing at the wall side (up to a height of 500 mm), which allows to connect a grill or a bend directly on the damper flange or to use a circular connection.

1. connection flange PG30
2. casing made of refractory material
3. damper blade
4. operating mechanism
5. sealing cold smoke
6. blade bumper
7. intumescent strip
8. transmission with locking (open/closed)
9. fusible link
10. product identification
11. graphite strip
12. wall limit



Range and dimensions CU2-L500

	\geq	\leq
(W x H) mm	200x200	1500x1000

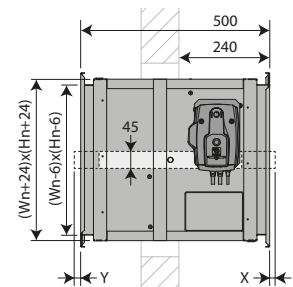

Wn/Hn in steps of 50 mm; intermediate dimensions are subject to extra cost (heights between ≥ 275 and ≤ 299 mm are not possible).

Hn [mm]	500	550	600	650	700	750	800	850	900	950	1000
x	-	1	26	51	76	101	126	151	176	201	226
y	2	27	52	77	102	127	152	177	202	227	252

Variant CU2 ATEX

Explosion protected fire damper for use in zone 1,2 (gas) and zone 21,22 (combustible dust). The option is available on all dimensions of the CU2.

ATEX certificate TÜV 14 ATEX 7540 X




1. explosion proof mechanism
2. equipotential connection



8 Range and dimensions CU2 ATEX

Range and dimensions CU2 ATEX

	\geq	\leq
(W x H) mm	200x200	1500x1000

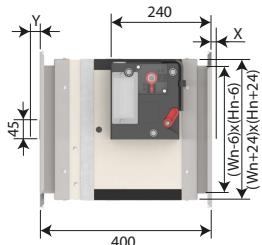

Wn/Hn in steps of 50 mm; intermediate dimensions are subject to extra cost (heights between ≥ 275 and ≤ 299 mm are not possible).

Exceeding blade: X = on the mechanism side, Y = on the wall side

Hn [mm]	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
x	-	-	-	-	-	1	26	51	76	101	126	151	176	201	226
y	2	27	52	77	102	127	152	177	202	227	252	277	302	327	352

Variant CU2L ATEX

Explosion protected fire damper for use in zone 1,2 (gas) and zone 21,22 (combustible dust) with a tunnel casing extension at one or both sides so that the damper blade does not exceed the tunnel. This extension makes it possible to use a circular connection (PRJ flange).


ATEX certificate TÜV 14 ATEX 7540 X



- extension: a = Hn/2-230 mm (on the side of the mechanism);
b = Hn/2-100 mm (on the wall side)

Range and dimensions CU2L ATEX


	\geq	\leq
(W x H) mm	200x200	1500x1000




Wn/Hn in steps of 50 mm; intermediate dimensions are subject to extra cost (heights between ≥ 275 and ≤ 299 mm are not possible).

Exceeding blade: X = on the mechanism side, Y = on the wall side

Hn < 300 mm

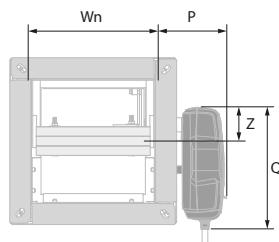

Hn \geq 300 mm

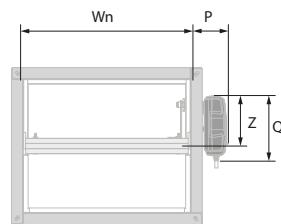

	CFTH	ONE(X)	BFL(T)	E/RMEX(T)		CFTH	ONE(X)	BFL(T)	BFN(T)	E/RMEX(T)
P	78	104	96	118		P	78	104	96	118
Q	180	191	110	95		Q	180	191	110	95
Z	62	47	74	72,5		Z	157	147	180	167,5

Evolution - kits

**KIT ONE T 24 FDCB**

Spring return actuator ONE 24V (with fusible link T) + bipolar beginning- and end-of-range switch

**KIT ONE T 24 FDCU**

Spring return actuator ONE 24V (with fusible link T) + unipolar beginning- and end-of-range switch

**KIT ONE T 24 FDCU ST**

Spring return actuator ONE 24V (with fusible link T) + unipolar beginning- and end-of-range switch + plug (ST)

**KIT ONE T 230 FDCB**

Spring return actuator ONE 230V (with fusible link T) + bipolar beginning- and end-of-range switch

**KIT ONE T 230 FDCU**

Spring return actuator ONE 230V (with fusible link T) + unipolar beginning- and end-of-range switch

**KIT ONE T 230 FDCU ST**

Spring return actuator ONE 230V (with fusible link T) + unipolar beginning- and end-of-range switch + plug (ST)

**KIT ONE-X 24**

Spring return actuator ONE-X 24V (with fusible link T)

Evolution - kits

**KIT ONE-X 230**

Spring return actuator ONE-X 230V (with fusible link T)

**KIT CFTH**

Automatic unlocking mechanism CFTH with FCU and without FTH 72

**KIT BFL24**

Spring return actuator BFL 24V

**KIT BFL24-ST**

Spring return actuator BFL 24V with plug (ST)

**KIT BFL230**

Spring return actuator BFL 230V

**KIT BFLT24**

Spring return actuator BFL 24V with thermo-electric fuse (T)

**KIT BFLT24-ST**

Spring return actuator BFL 24V with thermo-electric fuse (T) and plug (ST)

**KIT BFLT230**

Spring return actuator BFL 230V with thermo-electric fuse (T)

**KIT BFLT230-ST**

Spring return actuator BFL 230V with thermo-electric fuse (T)

**KIT BFN24**

Spring return actuator BFN 24V

**KIT BFN24-ST**

Spring return actuator BFN 24V with plug (ST)

**KIT BFN230**

Spring return actuator BFN 230V

**KIT BFNT24**

Spring return actuator BFN 24V with thermo-electric fuse (T)

**KIT BFNT24-ST**

Spring return actuator BFN 24V with thermo-electric fuse (T) and plug (ST)

**KIT BFNT230**

Spring return actuator BFN 230V with thermo-electric fuse (T)

**KIT BFNT230-ST**

Spring return actuator BFN 230V with thermo-electric fuse (T)

Evolution - kits

	KIT FDC CFTH	1 limit switch (FCU/DCU/FCB/DCB)
	KIT SN2 BFL/BFN	Auxiliary limit switch 'open/closed'
	KIT FTH72	Fusible link FTH 72°C (for CFTH)
	KIT ZBAT 72	Black spare part for thermo-electric fuse for BFLT/BFNT
	FUS72 ONE	Fusible link 72°C
	MECT	Testbox for mechanisms 24/48 V (magnet, motor, beginning and end of range switches)
	KIT BPLATE ONE(-X)	Set of base plate and mounting parts for spring return actuators ONE and ONE-X. Only applicable for fire dampers type CR2, CU2(/B), CU4, CU2-15. To be used when changing the type of mechanism if no base plate is present with the original mechanism or a different type of base plate was used. Mounting in combination with a ONE(-X) type motor kit.
	KIT BPLATE BFL/BFN	Set of base plate and mounting parts for spring return actuators type BFL(T) or BFN(T). Only applicable for fire dampers type CR2, CU2(/B), CU4, CU2-15. To be used when changing the type of mechanism if no base plate is present with the original mechanism or another type of base plate was used. Mounting in combination with a motor kit type BFL(T) or BFN(T).
	KIT BPLATE BF	Set of base plate and mounting parts for spring return actuators type BF(T). Only applicable for fire dampers type CR2, CU2(/B), CU4, CU2-15 produced before 1/7/2015.



KITS EQ

Kit equipotential connection (per set of 5 pieces)



KIT UG8


The UG8 optical smoke detector is a standalone unit for duct mounting. It samples air in the ventilation duct via the venturi-tube and analyses it in the housing situated outside of the duct. The UG8 is CE-marked product, certified according to EN54-27. It can be connected directly with a fire damper: in the event of smoke detection, the UG8 shuts off the power to the fire damper actuator and closes the damper. The UG8 is fitted with LEDs showing normal operation, smoke alarm, contamination and service alarms. The status can also be checked remotely via relay outputs.

Options - at the time of order



UL

Inspection shutter (set of 2)



EQ

Equipotential connection



EN1751_ATC_3

Air-tightness class ATC 3 (formerly C) (note: for CU2 H > 600 mm or W > 800 mm).




HY

Hygiene certificate according to VDI 6022-1 (note: for CU2 H > 600 mm or W > 800 mm)

Flange types - at the time of order

Flange types - at the time of order

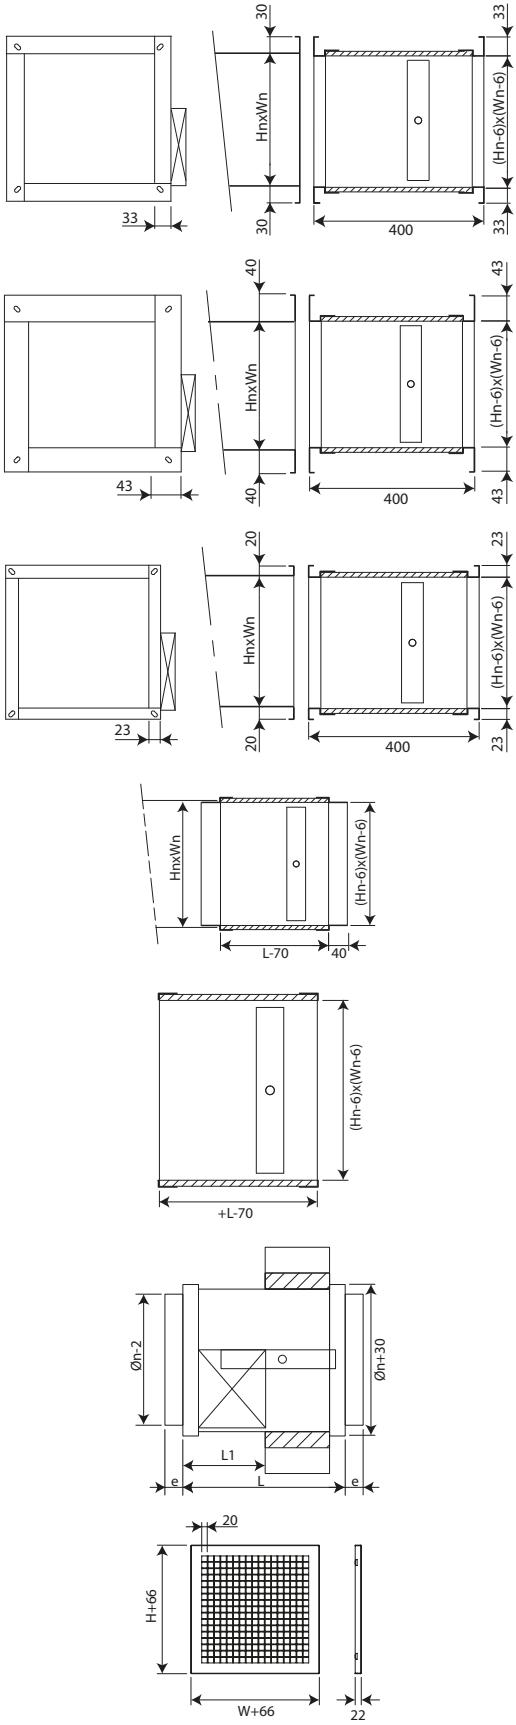

PG30 Connection to ducts with 30 mm flanges (either by sliding profile, or with bolts, or with clamps). Elliptical holes Ø 8,5 x 16 mm.

PG40 Connection to ducts with 40 mm flanges (either by sliding profile, or with bolts, or with clamps). Elliptical holes Ø 8,5 x 16 mm.

PG20 Connection to ducts with 20 mm flanges (either by sliding profile, or with bolts, or with clamps). Elliptical holes Ø 6,5 x 16 mm.

PM Connection to ducts by insertion. This type of frame is used in case of lack of space for a standard PG30 frame.

PP No connection. This type of frame is used on one side of a damper that ends into a room.

PRJ Circular connection with rubber sealing ring.

PPT Grill. Very well suited as protection grill on the end piece of a duct system.

Storage and handling

As this product is a safety element, it should be stored and handled with care.

Avoid:

- any kind of impact or damage
- contact with water
- deformation of the casing

It is recommended:


- to unload in a dry area
- not to flip or roll the product to move it
- not to use the damper as a scaffold, working table, etc.
- not to store smaller dampers inside larger ones

Installation

General points

- The installation must comply with the installation manual and the classification report.
- Axis orientation: see the declaration of performance.
- Avoid obstruction of adjoining ducts.
- Product installation: always with closed damper blade.
- Verify if the blade can move freely.
- Please observe safety distances with respect to other construction elements. The operating mechanism must also remain accessible: allow for a clearance of 200 mm around the housing.
- The air tightness class will be maintained if the damper is installed according to the installation manual.
- Rf-t fire dampers are always tested in standardised constructions according to EN 1366-2. The achieved results are valid for similar supporting constructions with a fire resistance, thickness and density equal or superior to the supporting construction used during the test.
- If the wall thickness exceeds the minimum thickness specified in our installation instructions, the following conditions apply to the sealing depth:
 - For flexible walls and sandwich panel system walls, the seal must always be applied over the full depth of the wall.
 - With rigid walls, rigid floors and plaster block walls, the minimum sealing depth as indicated in our installation instructions (often equal to the minimum wall thickness) is sufficient. Apply the seal at the height of the damper blade (from the wall limit indication).
- When installing a fire damper in a flexible metal stud wall, some installation methods do not require reinforcing profiles around the wall opening from a fire protection point of view (see below). Always follow the general instructions of the manufacturer of these wall systems when building this type of wall.
- The damper must remain accessible for inspection and maintenance.
- Schedule at least 2 visual checks each year.


	TEST	
2023	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2024	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2025	<input type="checkbox"/>	<input type="checkbox"/>
2026	<input type="checkbox"/>	<input type="checkbox"/>
2027	<input type="checkbox"/>	<input type="checkbox"/>

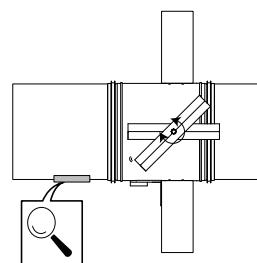


Installation

Installation at a minimal distance from another damper or from an adjacent supporting construction

1

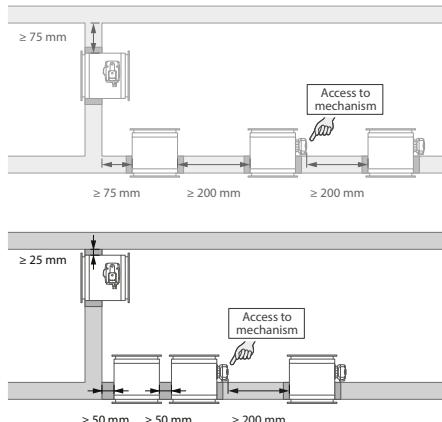

2

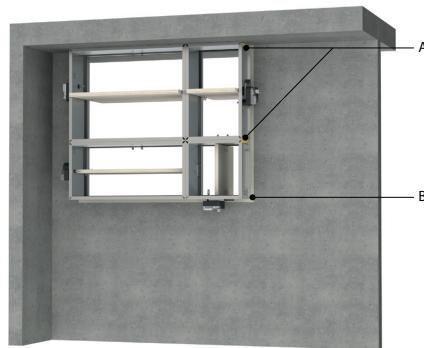

1. Principle

According to the European test standard EN 1366-2, a fire damper must be installed at a minimum distance of 75 mm from an adjacent supporting construction (wall/floor) and 200 mm from another damper, unless the solution was tested at a shorter distance.

This range of Rf-t fire dampers has been successfully tested and can be installed in a vertical or horizontal supporting construction, at a distance below the minimum set by the standard.

For rectangular dampers, the minimal distance is set to 50 mm between 2 dampers or between a damper and a vertical wall, and to 25 mm between a damper and a floor/ceiling.

2. Certified solution


For the Rf-t fire dampers, the solution consists of the following elements: A: Universal sealing for minimal distance; B: Sealing compliant with existing classifications (Declaration of Performance).

A. Sealing of the opening at the side with minimal distances between damper and wall/ceiling or another fire damper: rigid stone wool panels (150 kg/m^3) are applied to a depth of min. 400 mm, of which 150 mm on the mechanism side of the wall. On the non-mechanism side of the wall, the stone wool panels must be at least flush with the wall. This sealing is applied over the whole width/height of the damper(s).

When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels (A) may be replaced with standard 40 kg/m^3 stone wool, compressed by at least 40%.

B. Sealing of the rest of the opening according to the existing classifications for the fire damper (Declaration of Performance). Detailed information for each wall/sealing combination can be found in the respective installation methods.

3

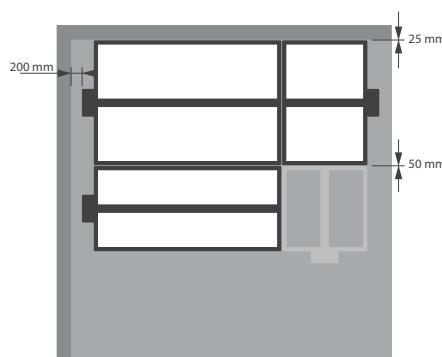

3. Restrictions

The installer may choose the direction of the blade axis freely: horizontal or vertical axis.

A maximum of 2 rectangular dampers can be installed at a minimum distance from one another, both vertically and horizontally (maximum cluster of 4 dampers).


Note: when sealing the opening with panels of fire resistant stone wool, the maximum number of dampers also depends on the maximum "blank seal" allowed for the selected sealing material. Please refer to the manufacturer's instructions for this information.

Installation in rigid wall and floor


The product was tested and approved in:

Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Gypsum EI 120 ($v_e i \leftrightarrow o$) S - (500 Pa)
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar EI 90 ($v_e i \leftrightarrow o$) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Rigid floor	Aerated concrete ≥ 150 mm	Mortar EI 120 ($h_o i \leftrightarrow o$) S - (500 Pa)
200x200 mm ≤ CU2 ≤ 1200x800 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar EI 120 ($v_e i \leftrightarrow o$) S - (500 Pa)
200x200 mm ≤ CU2 ≤ 1200x800 mm	Rigid wall	Aerated concrete ≥ 100 mm	Gypsum EI 90 ($v_e i \leftrightarrow o$) S - (500 Pa)
1200x800 mm < CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar / Gypsum EI 60 ($v_e i \leftrightarrow o$) S - (500 Pa)
1200x800 mm < CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar / Gypsum E 120 ($v_e i \leftrightarrow o$) S - (500 Pa)
1200x800 mm < CU2 ≤ 1500x800 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar EI 90 ($v_e i \leftrightarrow o$) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1500x800 mm	Rigid floor	Aerated concrete ≥ 125 mm	Mortar EI 120 ($h_o i \leftrightarrow o$) S - (300 Pa)


1

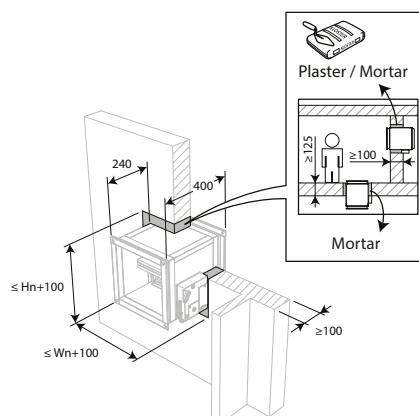


2

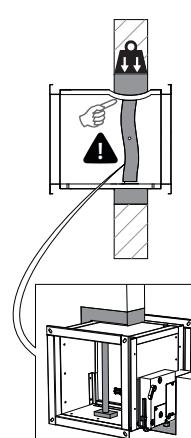

3




4

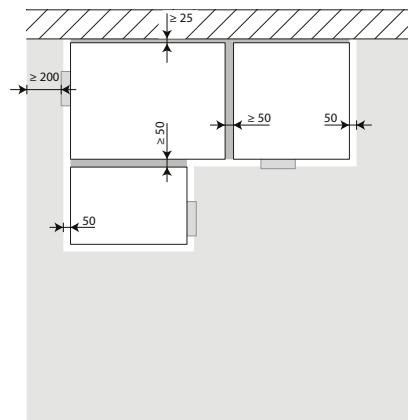

4. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).


Installation

5

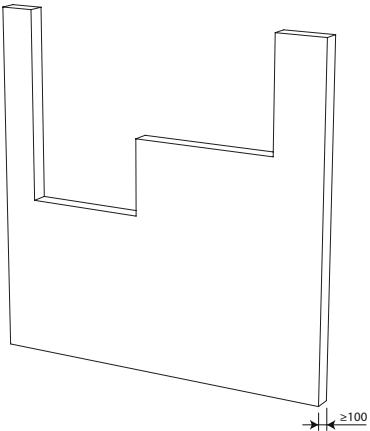


5. Make the necessary openings
 $(Wn + 100 \text{ mm}) \times (Hn + 100 \text{ mm})$ in the wall.

6

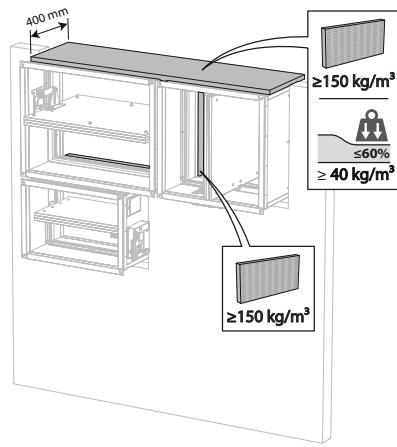

6. Mount the dampers in the opening.
 Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances.
 This sealing is applied over the whole width/height of the damper(s).
 When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

7

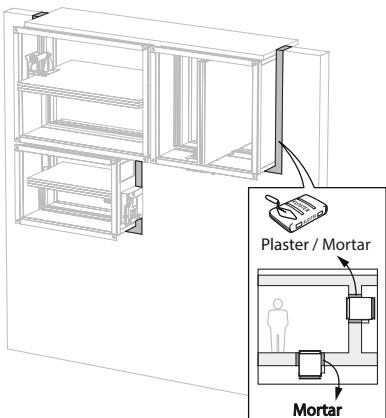


7. Seal remaining opening with standard mortar or gypsum in solid wall. When used in rigid floor: seal with standard mortar.

Installation in flexible wall (metal stud gypsum plasterboard wall)


The product was tested and approved in:

Range	Wall type		Sealing	Classification
200x200 mm ≤ CU2 ≤ 1200x800 mm	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	Stone wool ≥ 40 kg/m ³ + cover plates	EI 60 ($v_e i \leftrightarrow o$) S - (500 Pa)
200x200 mm ≤ CU2 ≤ 1200x800 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Stone wool ≥ 40 kg/m ³ + cover plates	EI 90 ($v_e i \leftrightarrow o$) S - (500 Pa)
1200x800 mm < CU2 ≤ 1500x800 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Stone wool ≥ 40 kg/m ³ + cover plates	EI 90 ($v_e i \leftrightarrow o$) S - (300 Pa)
1200x800 mm < CU2 ≤ 1500x800 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Stone wool ≥ 40 kg/m ³ + cover plates	E 120 ($v_e i \leftrightarrow o$) S - (300 Pa)


1

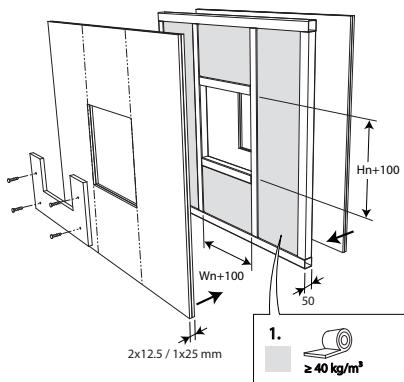


2

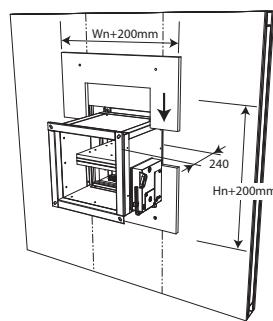

3

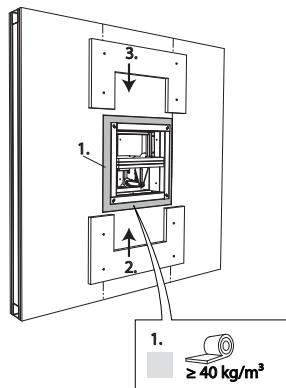


4

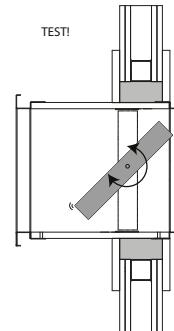


Installation

5

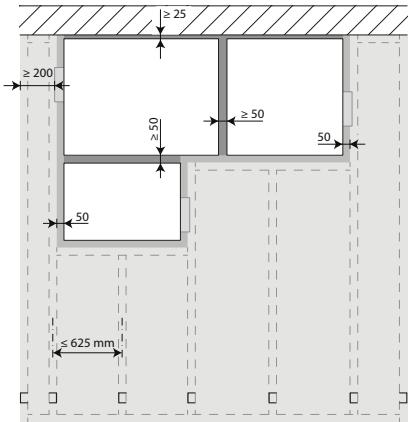


5. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).

6

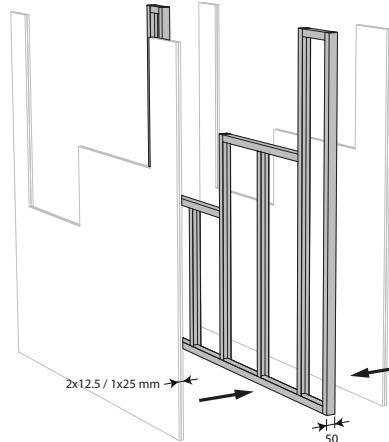

6. Build the drywall and mount horizontal and vertical studs around the opening.

7

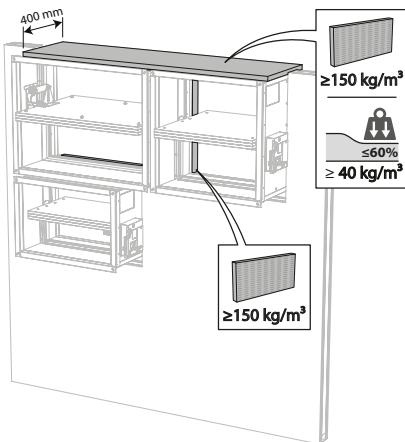


7. Mount the dampers in the opening.

Apply rigid stone wool panels (≥ 150 kg/m³) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances.


This sealing is applied over the whole width/height of the damper(s).

When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard ≥ 40 kg/m³ stone wool (e.g. Rockfit 431), compressed by at least 40%.

8

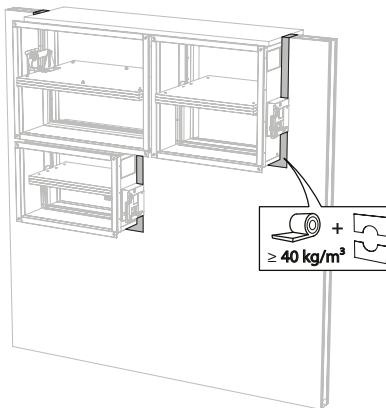

8. Seal the rest of the opening with standard stone wool 40 kg/m³ across the entire wall thickness.

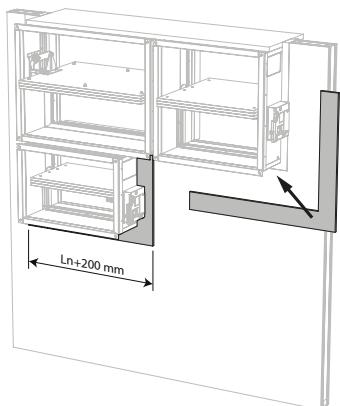9

9. Apply cover plates (gypsum plasterboards) to finish the surface at both sides.


Seal off the space between the plasterboards with jointfiller.

Installation


Installation in flexible wall (metal stud gypsum plasterboard wall), sealing with gypsum

The product was tested and approved in:


Range	Wall type	Sealing	Classification	
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	Gypsum	EI 60 ($v_e i \leftrightarrow o$) S - (500 Pa)
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Gypsum	EI 120 ($v_e i \leftrightarrow o$) S - (500 Pa)

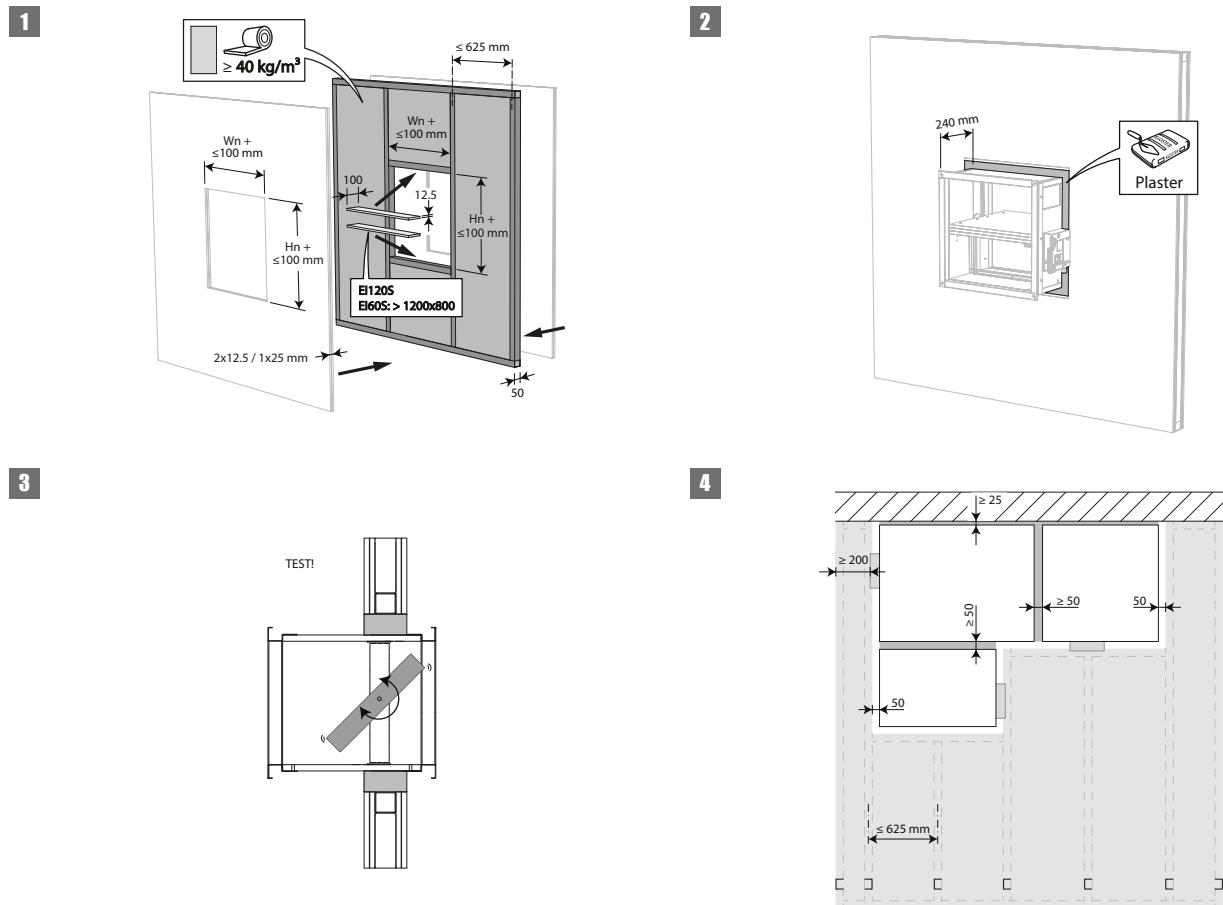

4. The dampers can be installed at a minimum distance from an adjacent floor/ceiling ($\geq 25 \text{ mm}$), from an adjacent wall or from another damper ($\geq 50 \text{ mm}$).

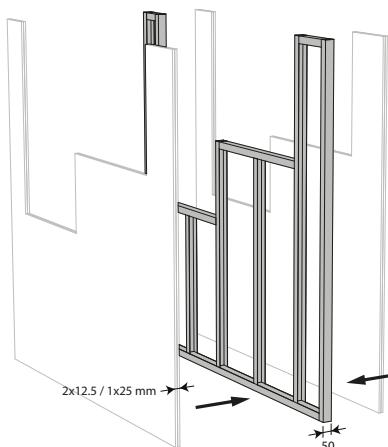5

5. Build the drywall and mount horizontal and vertical studs around the opening.

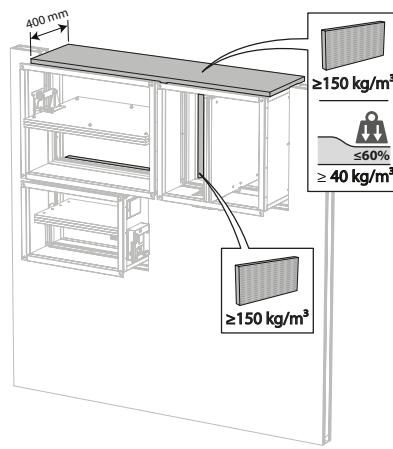
6

6. Mount the dampers in the opening.

Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances.

This sealing is applied over the whole width/height of the damper(s).

When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

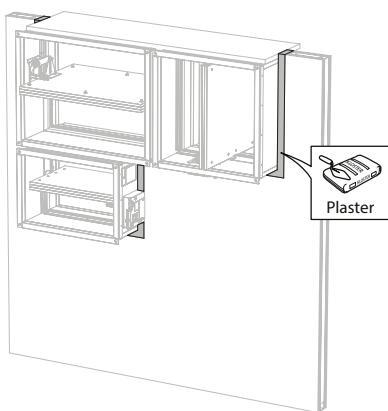7


7. Seal the rest of the opening (50 mm) with standard gypsum across the entire wall thickness.

Installation


Installation in flexible wall (metal stud gypsum plasterboard wall), sealing with mortar

The product was tested and approved in:


Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	EI 60 ($v_e i \leftrightarrow o$) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	EI 90 ($v_e i \leftrightarrow o$) S - (300 Pa)

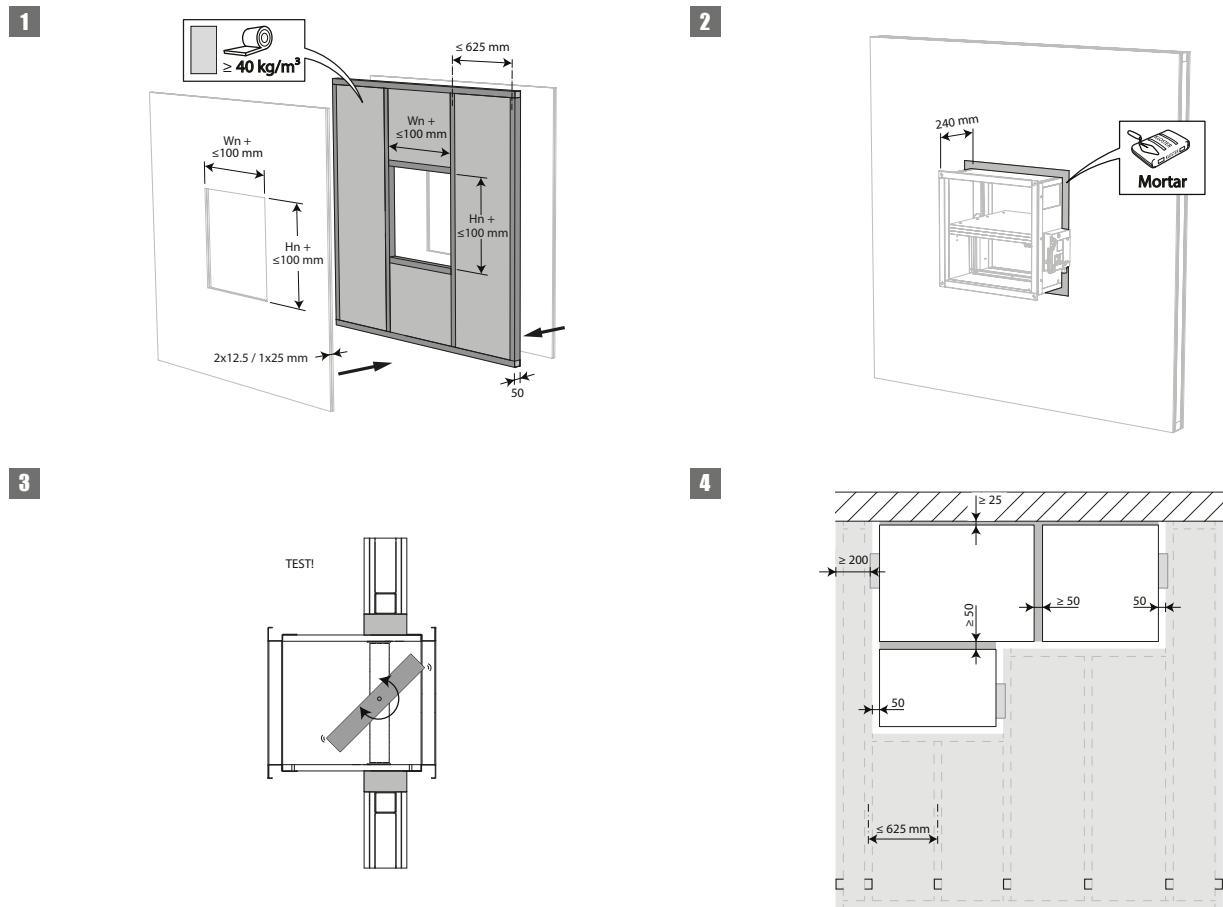

4. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).

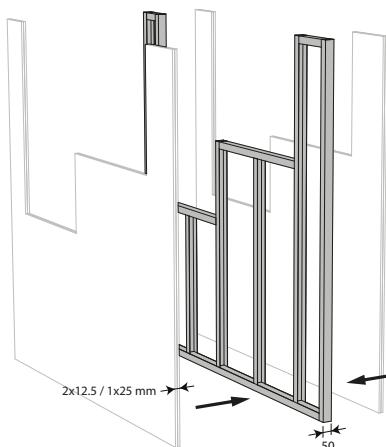5

5. Build the drywall and mount horizontal and vertical studs around the opening.

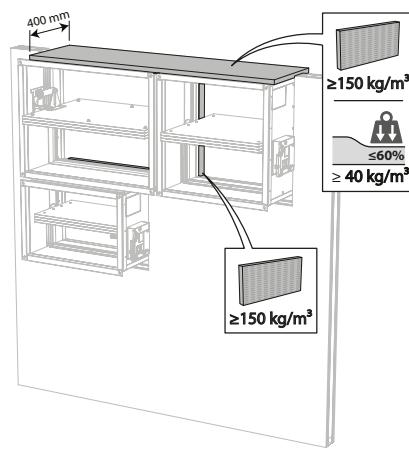
6

6. Mount the dampers in the opening.

Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances.

This sealing is applied over the whole width/height of the damper(s).

When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

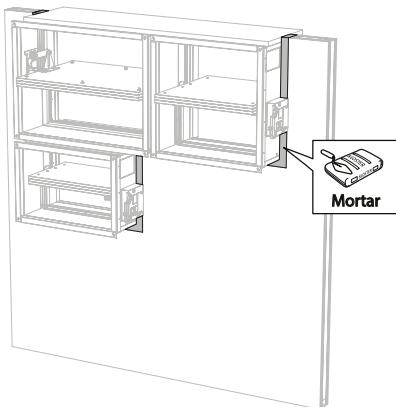7

7. Seal the rest of the opening (50 mm) with standard mortar across the entire wall thickness.


Installation

Installation in gypsum block wall


The product was tested and approved in:

Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Gypsum blocks ≥ 100 mm	EI 120 (v_e i ↔ o) S - (500 Pa)
200x200 mm ≤ CU2 ≤ 1200x800 mm	Flexible wall	Gypsum blocks ≥ 70 mm	EI 120 (v_e i ↔ o) S - (500 Pa)

1

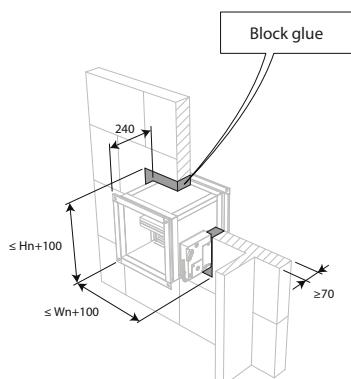


2

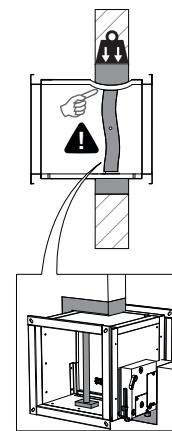


1. Seal the fire damper with a gypsum-based block glue.


3

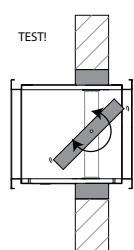


4

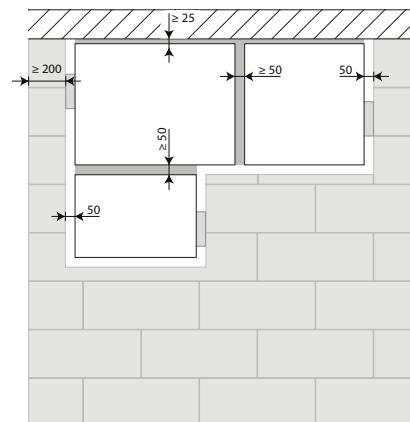


4. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).

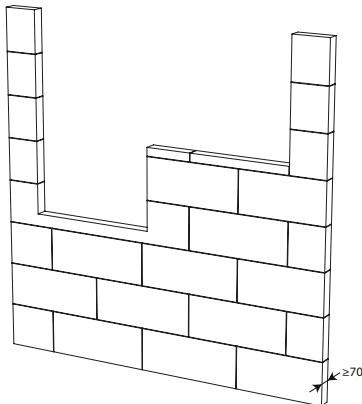5

5. Make the necessary openings
 $(Wn + 100 \text{ mm}) \times (Hn + 100 \text{ mm})$ in the wall.

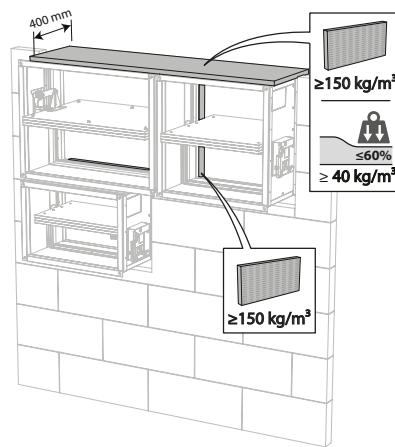6

6. Mount the dampers in the opening.
 Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances.
 This sealing is applied over the whole width/height of the damper(s).
 When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

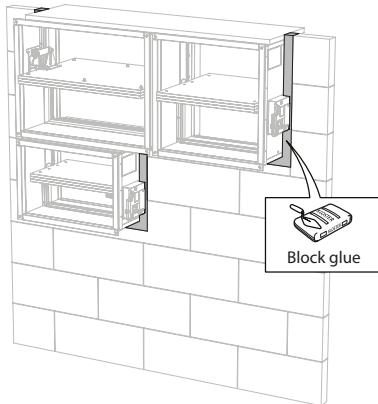7

7. Seal the rest of the opening (50 mm) with block glue across the entire wall thickness.


Installation

Installation in flexible and rigid wall, sealing with rigid stone wool boards with coating


The product was tested and approved in:

Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1200x800 mm	Rigid wall Aerated concrete ≥ 100 mm	Stone wool + coating ≥ 140 kg/m ³	EI 90 (v _e i ↔ o) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1200x800 mm	Flexible wall Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	Stone wool + coating ≥ 140 kg/m ³	EI 60 (v _e i ↔ o) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1200x800 mm	Flexible wall Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Stone wool + coating ≥ 140 kg/m ³	EI 90 (v _e i ↔ o) S - (300 Pa)

1

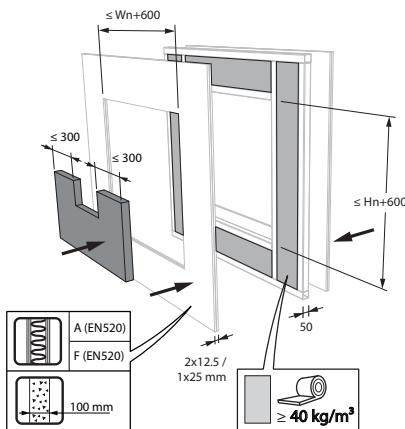


2

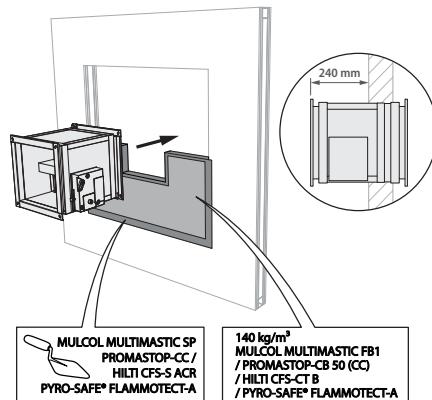


1. The opening around the damper is sealed with 2 layers of 50 mm-thick mineral wool panels with fire resistant coating on one side (type PROMASTOP-CB 50 / PROMASTOP-CC / HILTI CFS-CT B / Mulcol Multimastic FB1 / PYRO-SAFE® FLAMMOTECT-A).




3

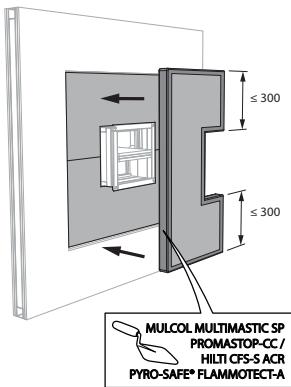


4

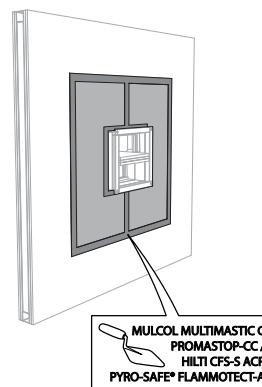

4. The joints on these 2 layers must be installed staggered and covered all around the edge with coating (type PROMASTOP-CC / HILTI CFS-S-ACR / Mulcol Multimastic SP / PYRO-SAFE® FLAMMOTECT-A).

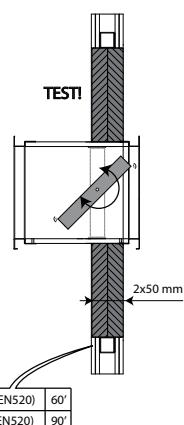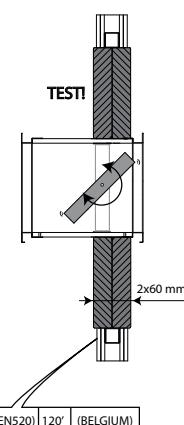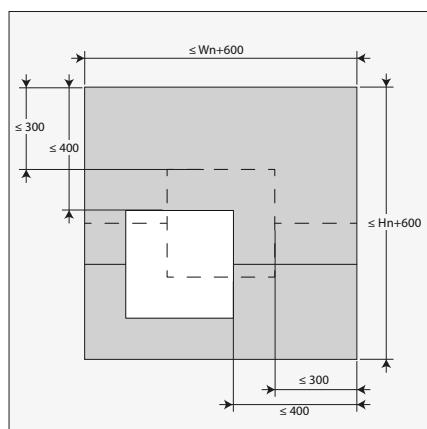
5**6****7**

7. The damper does not need to be centered in the opening (with max dimensions fire damper + 600 mm). The maximal distance between the damper and the edge of the opening is 400 mm.

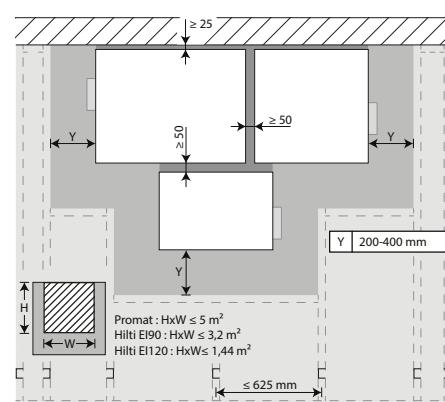
8

8. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).

Installation

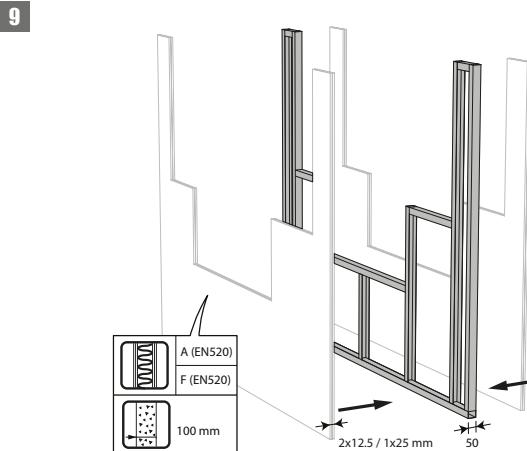

9. Make the necessary opening in the wall.

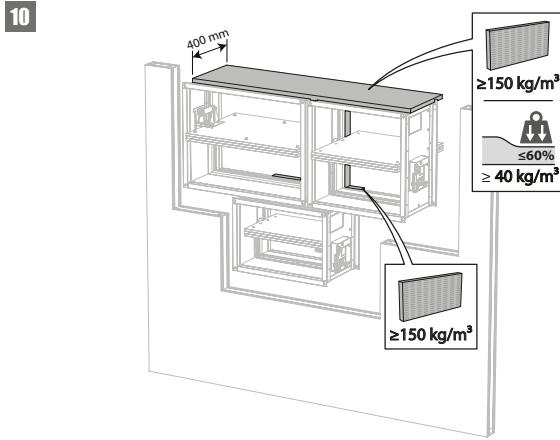


10. Mount the dampers in the opening.


Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances.

This sealing is applied over the whole width/height of the damper(s).

When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

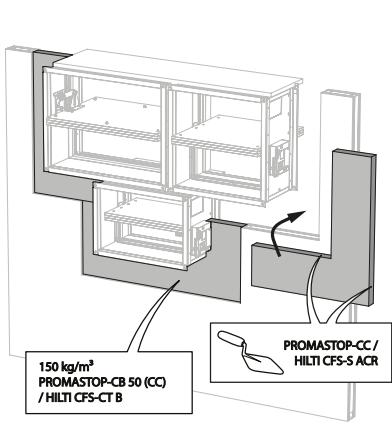

11. Seal the rest of the opening with 2 layers of 50 mm-thick coated rigid mineral wool panels (see above).


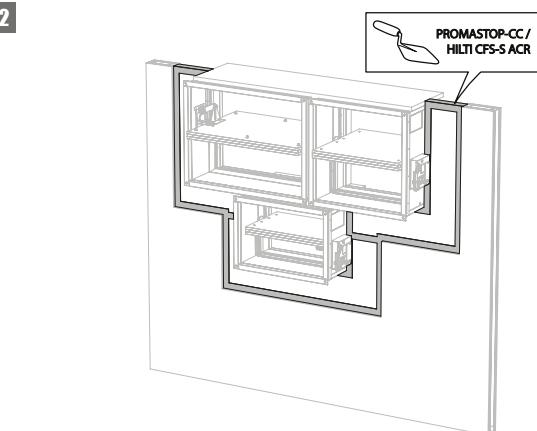


Installation remote from the wall, sealing and insulation with rigid stone wool boards with coating



*For classification up to EI 60 S: fire batt/stone wool boards of type PYRO-SAFE® FLAMMOTECT-A may be replaced by a similar type of fire batt with at least the same fire reaction class, density and thickness (tested according to EN 1366-3).

The product was tested and approved in:

Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	EI 90 (v_e i ↔ o) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	EI 60 (v_e i ↔ o) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	EI 90 (v_e i ↔ o) S - (300 Pa)

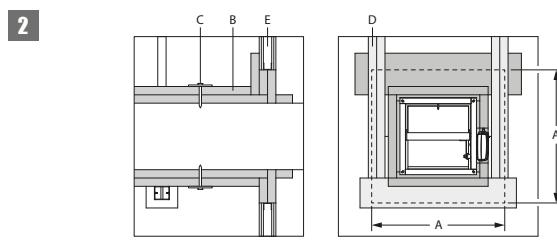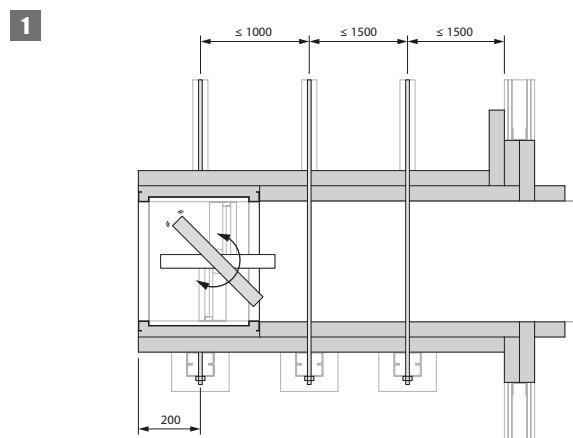

EI60S / EI90S	
A	$\leq (Wn+600)x(Hn+600)$
B	2x50 mm PYRO-SAFE® Flammotect-A*
C	10 x (Ø6,3x125 + M8x40)/m ²
D	Wn+Hn ≤ 1250 mm: M8 Wn+Hn ≤ 2000 mm: M10 Wn+Hn > 2000 mm: M12
E	 EI60S : A (EN520)  EI90S : F (EN520)
	100 mm

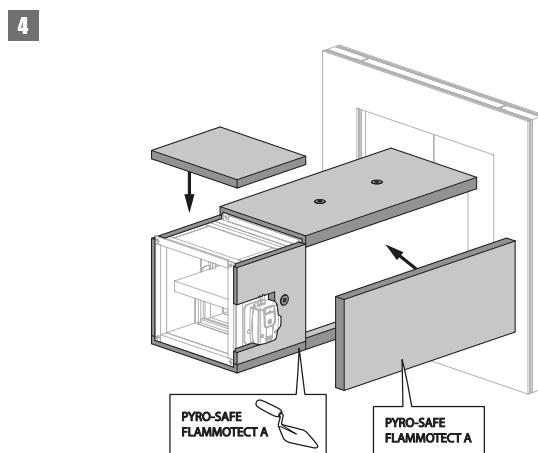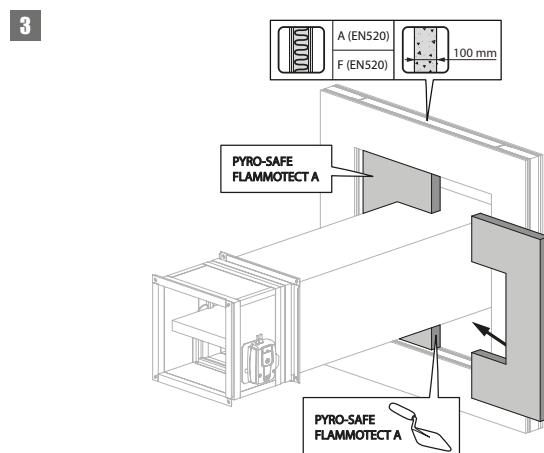


3. An opening is provided in the wall of maximum $(Wn+600 \text{ mm}) \times (Hn+600 \text{ mm})$ through which the ventilation duct runs. The opening around the duct in the wall will be sealed with one layer of coated stone wool type PYRO-SAFE® Flammotect-A. The edges will be sealed with PYRO-SAFE® Flammotect-A paste which will secure the boards.

4. The duct and the fire damper will be lined with coated stone wool boards over their full length. To attach the boards to the duct, they will be coated with fire-resistant paste on the side along the duct and on the edges and attached with bolts and washers (C). The boards at the level of the fire damper are adjusted so that they form a single surface together with the plates on the ventilation duct, leaving space for the mechanism.


Installation

5

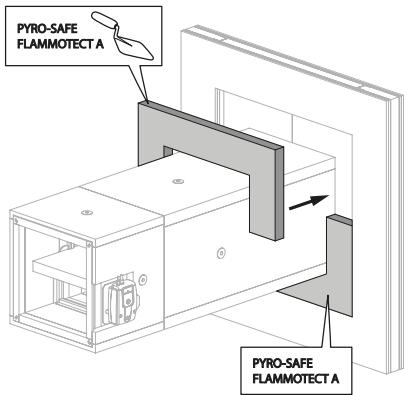


5. The second layer of coated stone wool is placed in the wall, the edges of which are sealed with fire-resistant paste.

6

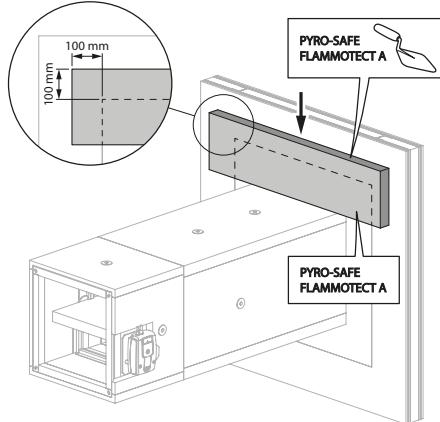


6. On the damper side of the wall, an extra layer of coated stone wool boards is added at the top, overlapping 100 mm with the wall along the two sides and the top. The edges of these boards are also provided with a layer of fire-resistant paste.

7

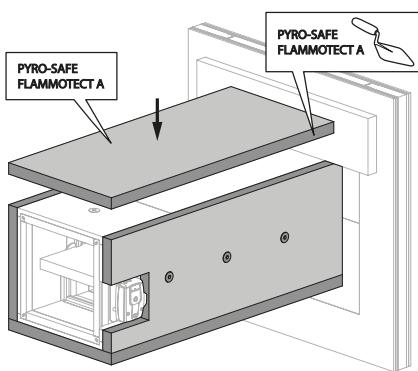


7. A second layer of coated stone wool boards will be added around the duct and fire damper, and the edges of the boards will again be treated with a layer of fire-resistant paste. The boards will be attached with bolts and washers (C).

8

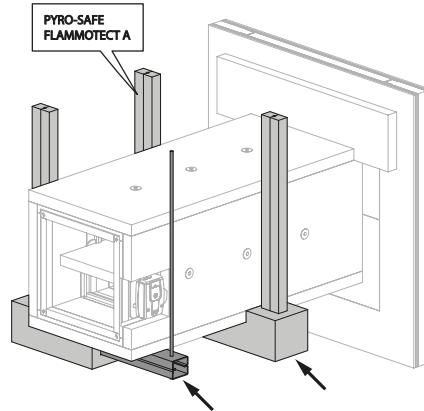


8. The support is placed and both the profiles and the threaded rods are wrapped with a layer of coated stone wool boards. Fire-resistant paste is applied to the edges.

9

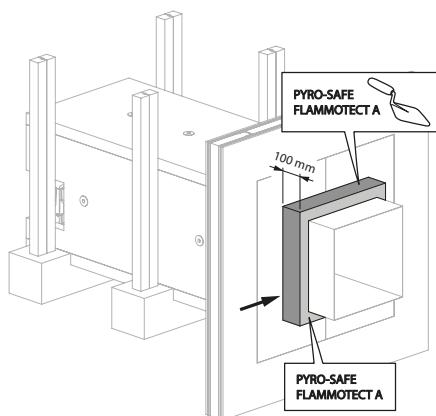


10



9. On the wall side away from the fire damper, a strip of coated stone wool is applied around the duct. This strip is 100 mm wide and the edges are covered with a layer of fire-resistant paste.

11

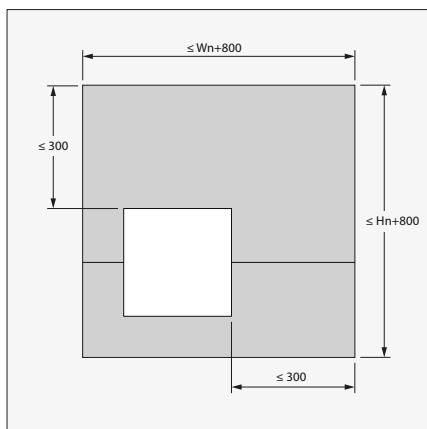

11. The fire damper and the ventilation duct can be placed out of centre of the opening. The distance between the duct and the edge of the opening should not exceed 300 mm.


Installation

Installation in rigid floor, sealing with rigid stone wool boards with coating


The product was tested and approved in:

Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1200x800 mm	Rigid floor	Aerated concrete ≥ 150 mm Stone wool + coating ≥ 140 kg/m ³	EI 90 (h_o i ↔ o) S - (300 Pa)

1

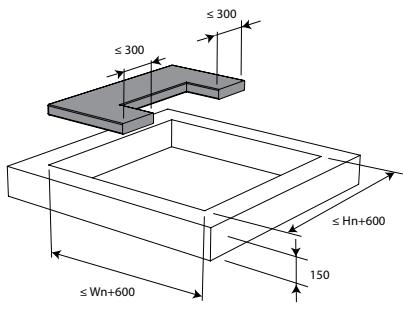


2

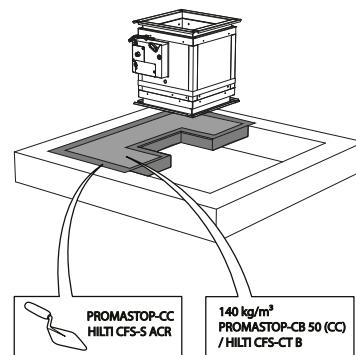


1. The opening around the damper is sealed with 2 layers of 50 mm-thick mineral wool panels with fire resistant coating on one side (type PROMASTOP-CB 50 / PROMASTOP-CB/CC 50 / HILTI CFS-CT B).



3

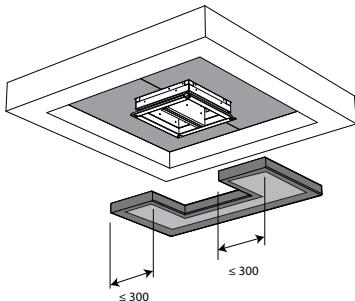


4

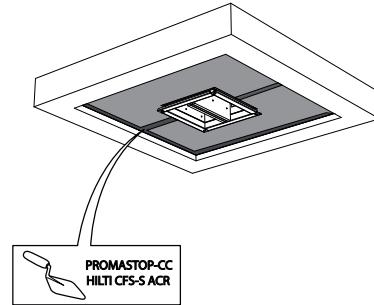

3. The joints on these 2 layers must be installed staggered and covered all around the edge with coating (type PROMASTOP-CC / HILTI CFS-S-ACR).

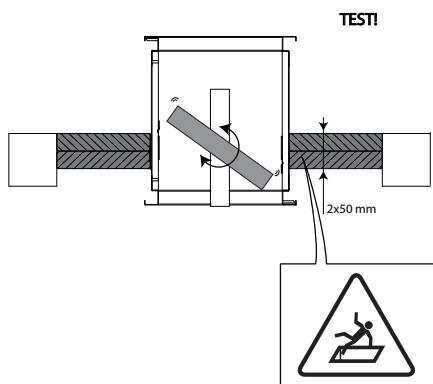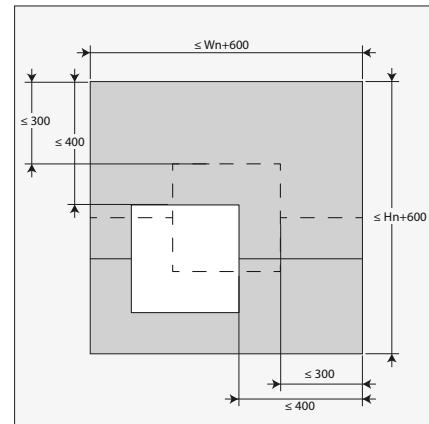5**6**

6. The damper does not need to be centered in the opening (with max dimensions fire damper + 600 mm). The maximal distance between the damper and the edge of the opening is 400 mm.

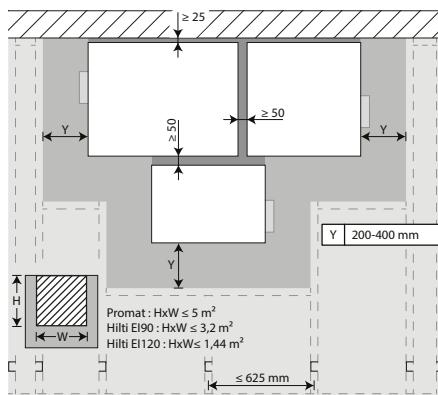7

7. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).


For details, please refer to 'Installation in flexible and rigid wall, sealing with rigid stone wool boards with coating'

Installation

Installation in shaft wall

The product was tested and approved in:

Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1500x800 mm	Asymmetrical flexible wall (shaft wall)	Metal studs gypsum plasterboard Type F (EN 520) ≥ 82.5 mm	Stone wool ≥ 40 kg/m ³ + cover plates EI 60 (v_e i ↔ o) S - (300 Pa)

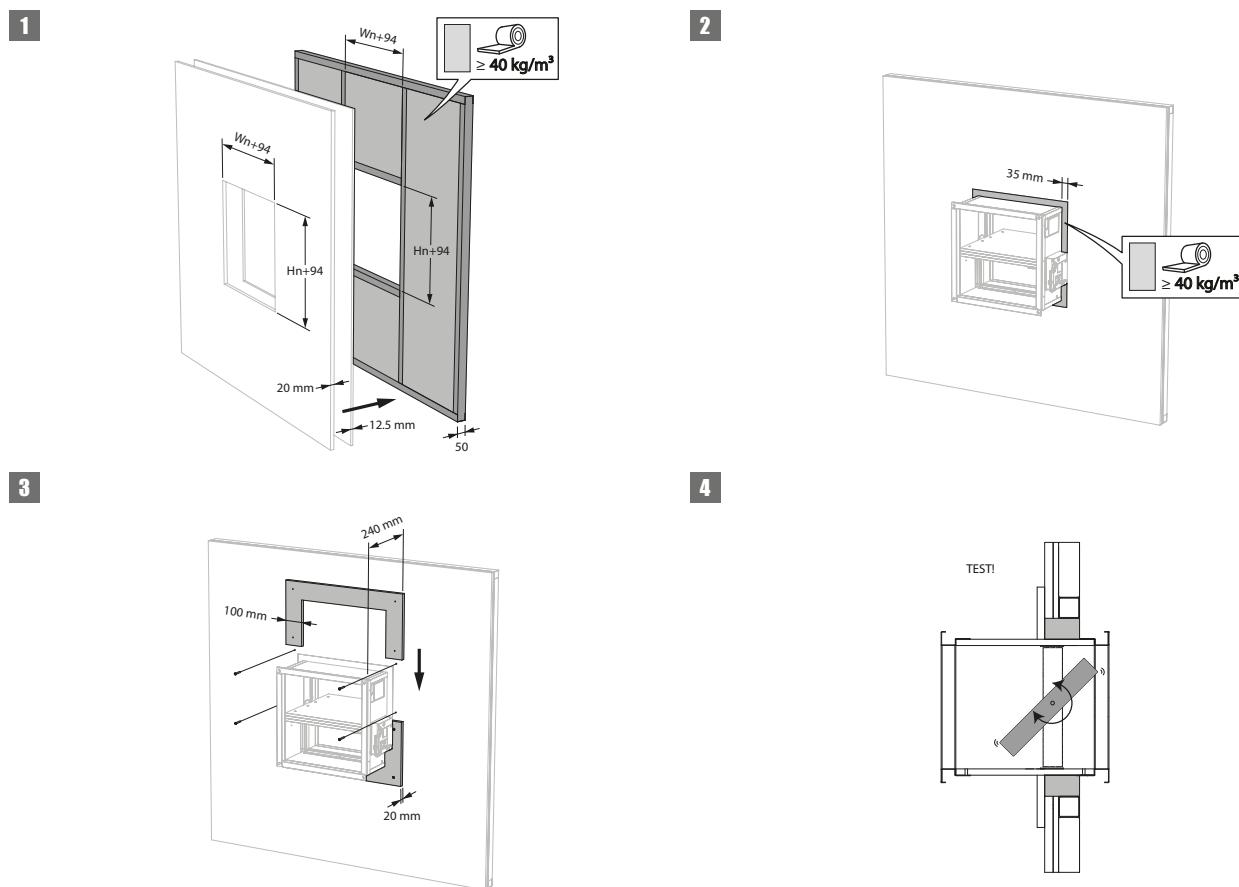

Maintenance

- No specific maintenance required.
- Schedule at least 2 visual checks each year.
- Remove dust and all other particles before use.
- Follow local maintenance regulations (i.e. BS9999 Annex V; NF S 61-933) and EN13306.
- Read the maintenance instructions on our website:
https://www.rft.eu/assets//PIM/DOCUMENTS/BROCHURE%20KITS/BRO_K139_MAINTENANCE_C.pdf
- Use the damper at up to 95% humidity, non-condensing.
- The fire damper can be cleaned with a dry or slightly damp cloth. It is forbidden to use abrasive cleaners or mechanical cleaning techniques (brush).


Operation and mechanisms



CFTH Mechanism with fusible link

The unlocking mechanism CFTH automatically unlatches the damper blade when the temperature in the duct rises above 72°C. The damper can also be unlocked and reset manually.

1. unlocking button
2. resetting handle
3. cable entrance

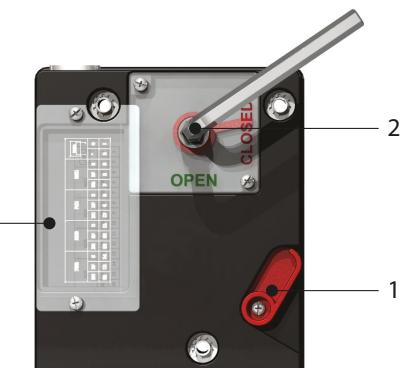

Options - at the time of order

FCU	Limit switch 'closed'
FDCU	Unipolar limit switch 'open/closed'
FDCB	Bipolar auxiliary limit switch 'open/closed'

Unlocking

- **manual unlocking:** use the unlocking button (1).
- **automatic unlocking:** when the fusible link melts at 72° C.
- **remote unlocking:** n/a

Resetting

- **manual resetting:** use the enclosed Hex key and turn clockwise(2).
- **motorised resetting:** n/a

Caution:

⚠ The mechanism may never be tested on its own, without being attached to the damper. Such a test might damage the mechanism or the operator might be injured.


Operation and mechanisms



ONE Spring return actuator for remote control

The spring-return actuator ONE is designed to easily operate Rf-t fire dampers of all sizes, automatically or remotely. Six models are available, 24 or 230 volt, with FDCU or FDCB position switches; and optionally with plug (ST).

1. unlocking button
2. blade position indicator
3. LED
4. battery compartment to reset motor

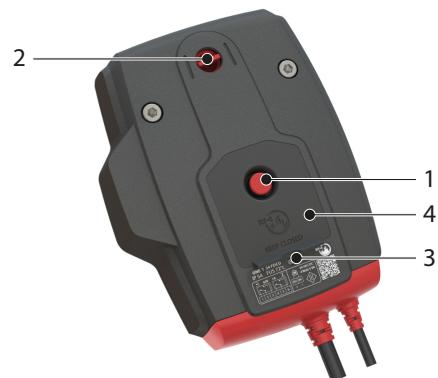

Unlocking

- **manual unlocking:** shortly press the unlocking button (1) once.
- **automatic unlocking:** the fusible link reacts as soon as the temperature in the duct reaches 72°C.
- **remote unlocking:** by interrupting the power supply.

Resetting

- **manual resetting:** open the battery compartment (4) and press a 9V battery against the contact springs. Hold this position until the LED (3) emits a continuous light.
Check whether the indicator (2) shows that the damper blade is in the open position.
Remove the battery, the LED fades away.
Close the battery compartment.
- **motorised resetting:** switch off the power supply for at least 5 sec. Power the actuator (respect the prescribed voltage) for at least 75 sec. The resetting stops automatically when the end of range is reached (damper open).

Caution:

- ⚠ If the LED (3) flickers fast (3x/sec.), the battery is discharged: use a new battery.
- ⚠ If the LED (3) flickers slowly (1x/sec), the resetting is in progress.
- ⚠ If the LED (3) is continuously on, the resetting is complete and the motor is powered.
- ⚠ If the actuator detects voltage on the power cable, a brief contact of the battery is enough to start the resetting process.
- ⚠ The power supply of this actuator cannot be individually replaced. If the cable is damaged, the whole unit must be discarded and replaced.
- ⚠ The housing of the mechanism contains a temperature sensor. When the temperature in the housing exceeds 72°C, the mechanism unlocks. The LED flashes twice per second. When the temperature drops below 72°C, the mechanism can only be reset in a motorised manner after a manual reset (with a battery).
- ⚠ The end of range switches need 1 second after operation to adopt a stable position.
- ⚠ Make sure the thermal trigger device is present in the actuator. The actuator might not function properly if this is not the case.


	prod. < 1/7/2015				prod. ≥ 1/7/2015			
	CR60(1s) CR120	CU-LT CU-LT-1s	CR2≤400 CU2≤1200	CR2>400 CU2>1200	CR60(1s) CR120(1s)	CU-LT CU-LT-1s	CR2≤400 CU2≤1200	CR2>400 CU2>1200
Kit ONE	●	●	●		●	●	●	●



ONE-X Spring return actuator with integrated communication module.

The ONE-X is a spring return actuator with integrated communication module designed to simply operate Rf-t fire dampers of all sizes, automatically or remotely. The ONE-X is available in two versions: 24 V and 230 V.

1. unlocking button
2. blade position indicator
3. LED red: status
4. battery compartment
5. LED blue: communication
6. LED orange: error message
7. supply
8. bus cable

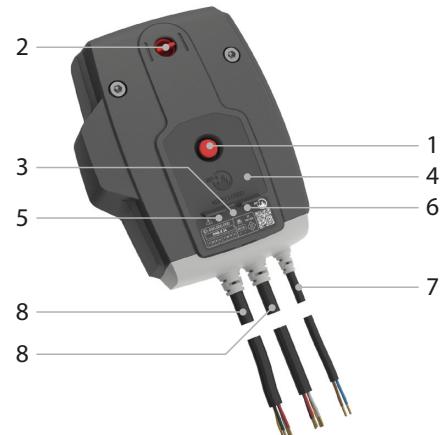

Unlocking

- **manual unlocking:** shortly press the unlocking button (1) once.
- **automatic unlocking:** the fusible link reacts as soon as the temperature in the duct reaches 72°C.
- **remote unlocking:** via ZENiX controller

Resetting

- **manual resetting:** Open the battery compartment (4) and press a 9V battery against the contact springs. Hold this position until the red LED (3) emits a continuous light. Control whether the indicator (2) indicates that the damper blade is open. Remove the battery. Close the battery compartment.
- **motorised resetting:** via ZENiX controller. By applying voltage during first use.

Caution:

- ⚠ If the ONE-X detects voltage on the power cable, a brief contact of the battery is enough to start the resetting process, provided the ZENiX controller has sent the damper to open position or the ONE-X is being operated for the first time.
- ⚠ The power supply of this actuator cannot be individually replaced. If the cable is damaged, the whole unit must be discarded and replaced.
- ⚠ The housing of the mechanism contains a temperature sensor. When the temperature in the housing exceeds 72°C, the mechanism unlocks. The LED flashes twice per second. When the temperature drops below 72°C, the mechanism can only be reset in a motorised manner after a manual reset (with a battery).
- ⚠ The end of range switches need 1 second after operation to adopt a stable position.

Safety regulations:

- ⚠ Do not use the ONE-X for any application other than the specified applications, in particular not in aircraft or other airborne vehicles.
- ⚠ The company that purchases and/or installs the ONE-X is fully responsible for the correct operation of the entire system. Only authorised specialists may perform the installation. All rules and regulations, including statutory regulations, must be observed during installation.
- ⚠ This device contains electrical or electronic components and must not be disposed of as household waste. All locally applicable regulations and requirements must be strictly observed.

Operation and mechanisms



BFL(T) Remotely controlled spring return actuator

The spring return actuator BFL(T) is especially designed to operate fire dampers remotely. The BFL(T) variant is intended for fire dampers with smaller dimensions (CR60, CR120, CR2 with $\varnothing \leq 400$ mm, CRS60 with $\varnothing \leq 315$ mm, CU2 / CU2-15 / CU4 with $W+H \leq 1200$ mm or for CU-LT and CU-LT-1s). For Markage FD with $H = 200$ mm or $H = 2200$ mm (in combination with BFT motor).

1. locking button
2. plug (ST)
3. access for manual resetting
4. thermo-electric tripping device (T)



Options - at the time of order

SN2 BFL/BFN Auxiliary limit switch 'open/closed'

Unlocking

- **manual unlocking:** place the locking button on "unlock". (In case of BFLT: the damper can alternatively be unlocked by pushing the "test" button on the thermo-electric fuse)
- **automatic unlocking:** the thermo-electric fuse reacts as soon as the temperature reaches 72°C (type BFLT).
- **remote unlocking:** by interrupting the power supply.

Caution:

⚠ The thermo-electric fuse will not move the damper into its safety position (when the temperature reaches 72°C) if the motor is not powered.

Resetting

- **manual resetting:** turn the enclosed handle anti-clockwise. To block the motor, place the locking button on "lock"
- **motorised resetting:** switch off the power supply for at least 10 seconds. Supply the actuator (respect the prescribed voltage) for at least 75 seconds. The resetting stops automatically when the end of range is reached (damper open) - it takes about 60 seconds to reset the damper - or when the power supply is interrupted.

Caution:

⚠ Do not use a drill or powered screwdriver.
⚠ Stop as soon as the motor is completely rearmed (end of range).

	prod. < 1/7/2015				prod. ≥ 1/7/2015			
	CR60(1s) CR120	CU-LT CU-LT-1S	CR2≤400 CU2≤1200	CR2>400 CU2>1200	CR60(1s) CR120 (1s)	CU-LT CU-LT-1S	CR2≤400 CU2≤1200	CR2>400 CU2>1200
Kit BFL					•	•	•	
Kit BFN	•	•	•					•
Kit BF				•				



BFN(T) Remotely controlled spring return actuator

The spring return actuator BFN(T) is especially designed to operate fire dampers remotely. The BFN(T) variant is intended for fire dampers with large dimensions (CRE60, CR2 with $\varnothing > 400$ mm, CRS60 with $\varnothing > 315$ mm or CU2, CU2-15, CU4 with $W+H > 1200$ mm. For Markage FD with H of 400 and 600 mm or with H = 1200 mm (2 pcs) and with H = 2400 mm (in combination with BFT motor).

1. locking button
2. plug (ST)
3. access for manual resetting
4. thermo-electric tripping device (T)



Options - at the time of order

SN2 BFL/BFN Auxiliary limit switch 'open/closed'

Unlocking

- **manual unlocking:** place the locking button on "unlock". (In case of BFNT: the damper can alternatively be unlocked by pushing the "test" button on the thermo-electric fuse)
- **automatic unlocking:** the thermo-electric fuse reacts as soon as the temperature reaches 72°C (type BFNT).
- **remote unlocking:** by interrupting the power supply.

Caution:

⚠ The thermo-electric fuse will not move the damper into its safety position (when the temperature reaches 72°C) if the motor is not powered.

Resetting

- **manual resetting:** turn the enclosed handle anti-clockwise. To block the motor, place the locking button on "lock"
- **motorised resetting:** switch off the power supply for at least 10 seconds. Supply the actuator (respect the prescribed voltage) for at least 75 seconds. The resetting stops automatically when the end of range is reached (damper open) - it takes about 60 seconds to reset the damper - or when the power supply is interrupted.

Caution:

⚠ Do not use a drill or powered screwdriver.
⚠ Stop as soon as the motor is completely rearmed (end of range).

	prod. < 1/7/2015				prod. ≥ 1/7/2015			
	CR60(1s) CR120	CU-LT CU-LT-1S	CR2≤400 CU2≤1200	CR2>400 CU2>1200	CR60(1s) CR120 (1s)	CU-LT CU-LT-1S	CR2≤400 CU2≤1200	CR2>400 CU2>1200
Kit BFL					•	•	•	
Kit BFN	•	•	•					•
Kit BF				•				

Operation and mechanisms



Ex (ROTORK-SCHISCHEK) Explosion proof (ATEX) motor RMEX(T)

Explosion proof (ATEX) motor • Zone 2/22: low risk of explosion <10h/year of explosive environment

1. access for manual resetting
2. thermo-electric tripping device (T)
3. switch S (selection of the running time)



Unlocking

- **manual unlocking:** n.a.
- **automatic unlocking:** as soon as the reaction temperature (72°C) of the thermo-electric tripping device is reached (Type RMEXT).
- **remote unlocking:** by interrupting the power supply.

Caution:

- ⚠ Selection of running time spring return:** the running time of 3 or 10 sec. spring return is selected by wiring (see electrical connection).

Resetting

- **manual resetting:** use the delivered socket wrench, turn in slow motion and apply enough torque/force.
- **motorised resetting:** supply the actuator (respect the prescribed voltage) for at least 60 sec. The resetting stops automatically.

Caution:

- ⚠ Selection of running time (resetting):** place the switch (S) into the correct/selected position in accordance to the details below.
The selected parameter will work at next operation of the actuator. Adjustment can be done even without supply voltage.
- ⚠ 3 sec./90°: S=00; 15 sec./90°: S=01; 30 sec./90°: S=02; 60 sec./90°: S=03; 120 sec./90°: S=04**
- ⚠ If the motor is powered, turn the switch only if the actuator is not running !**

Caution:

- ⚠ The mechanism may never be tested on its own, without being attached to the damper. Such a test might damage the mechanism or the operator might be injured.**



Ex (ROTORK-SCHISCHEK) Explosion proof (ATEX) motor EMEX(T)

Explosion proof (ATEX) motor for different risk areas:
 • Zone 1/21: average risk of explosion >100h/year explosive environment
 • Zone 2/22: low risk of explosion <10h/year of explosive environment

1. access for manual resetting
2. thermo-electric tripping device (T)
3. switch S (selection of the running time)



Unlocking

- **manual unlocking:** n.a.
- **automatic unlocking:** as soon as the reaction temperature (72°C) of the thermo-electric tripping device is reached (Type EMEXT).
- **remote unlocking:** by interrupting the power supply.

Caution:

- ⚠ Selection of running time spring return: the running time of 3 or 10 sec. spring return is selected by wiring (see electrical connection).

Resetting

- **manual resetting:** use the delivered socket wrench, turn in slow motion and apply enough torque/force.
- **motorised resetting:** supply the actuator (respect the prescribed voltage) for at least 60 sec. The resetting stops automatically.

Caution:

- ⚠ Selection of running time (resetting): place the switch (S) into the correct/selected position in accordance to the details below.
The selected parameter will work at next operation of the actuator. Adjustment can be done even without supply voltage.
- ⚠ 3 sec./90°: S=00; 15 sec./90°: S=01; 30 sec./90°: S=02; 60 sec./90°: S=03; 120 sec./90°: S=04
- ⚠ If the motor is powered, turn the switch only if the actuator is not running !


Caution:

- ⚠ The mechanism may never be tested on its own, without being attached to the damper. Such a test might damage the mechanism or the operator might be injured.

Electrical connection


Electrical connection

CFTH

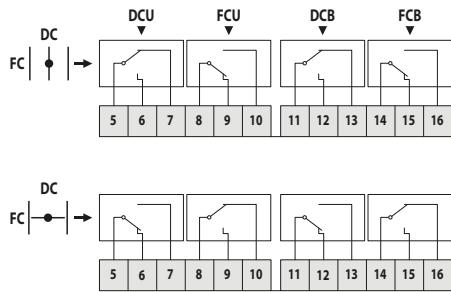


DC : Switch open position fire damper
FC : Switch closed position fire damper

ONE

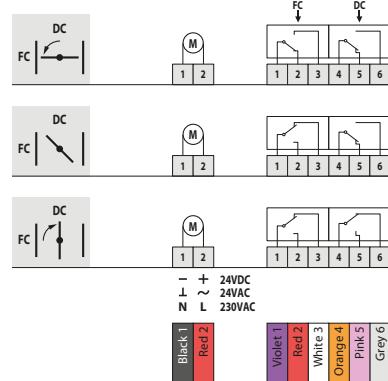


DC : Switch open position fire damper
FC : Switch closed position fire damper

ONE-X

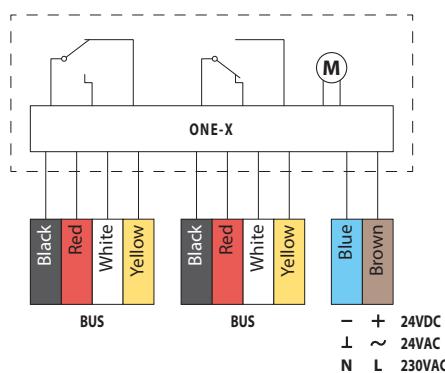


BF(I)

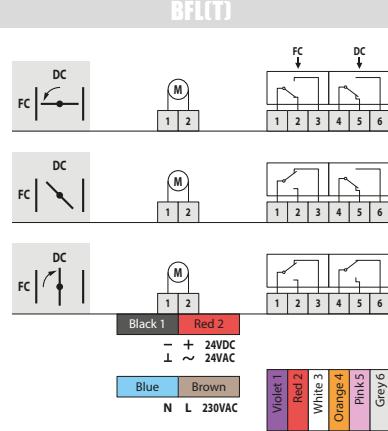

DC : Switch open position fire damper
FC : Switch closed position fire damper

Ex (ROTORK-SCHISCHEK)

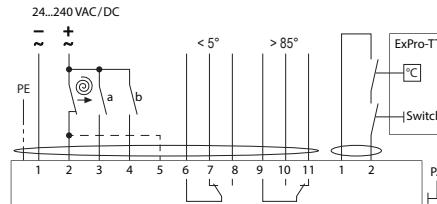

DC : Switch open position fire damper
FC : Switch closed position fire damper

MEC	Nominal voltage motor	Nominal voltage magnet	Power consumption (stand-by)	Power consumption (operating)	Standard switches	Resetting time motor
CFTH	N/A	N/A	N/A	N/A	1mA...6A, DC 5V...AC 250V	N/A
ONET 24 FDCU	24 V AC/DC (-10/+20%)	N/A	0,28 W	4,2 W	1mA...1A 60VDC or 1mA...100mA 230VAC	< 75 s (cabled) / <85 s (battery)
ONET 24 FDCU ST	24 V AC/DC (-10/+20%)	N/A	0,28 W	4,2 W	1mA...1A 60VDC or 1mA...100mA 230VAC	< 75 s (cabled) / <85 s (battery)
ONET 230 FDCU	230 V AC (-15/+15%)	N/A	0,57 W	4,2 W	1mA...1A 60VDC or 1mA...100mA 230VAC	< 75 s (cabled) / <85 s (battery)
ONET 230 FDCU ST	230 V AC (-15/+15%)	N/A	0,57 W	4,2 W	1mA...1A 60VDC or 1mA...100mA 230VAC	< 75 s (cabled) / <85 s (battery)
ONET 24 FDCB	24 V AC/DC (-10/+20%)	N/A	0,28 W	4,2 W	1mA...1A 60VDC	< 75 s (cabled) / <85 s (battery)
ONET 230 FDCB	230 V AC (-15/+15%)	N/A	0,57 W	4,2 W	1mA...1A 60VDC	< 75 s (cabled) / <85 s (battery)
ONE-X 24	24 V AC/DC (-10/+20%)	N/A	0,28 W	4,2 W		< 75 s (cabled) / <85 s (battery)
ONE-X 230	230 V AC (-15/+15%)	N/A	0,57 W	4,2 W		< 75 s (cabled) / <85 s (battery)
BFL24	24 V AC/DC	N/A	0,7 W	2,5 W	1mA...3A, AC 250V	< 60 s
BFL24-ST	24 V AC/DC	N/A	0,7 W	2,5 W	1mA...3A, AC 250V	< 60 s
BFL230	230 V AC	N/A	0,9 W	3 W	1mA...3A, AC 250V	< 60 s
BFLT24	24 V AC/DC	N/A	0,8 W	2,5 W	1mA...3A, AC 250V	< 60 s
BFLT24-ST	24 V AC/DC	N/A	0,8 W	2,5 W	1mA...3A, AC 250V	< 60 s
BFLT230	230 V AC	N/A	1,1 W	3,5 W	1mA...3A, AC 250V	< 60 s
BFLT230-ST	230 V AC	N/A	1,1 W	3,5 W	1mA...3A, AC 250V	< 60 s
BFN24	24 V AC/DC	N/A	1,4 W	4 W	1mA...3A, AC 250V	< 60 s
BFN24-ST	24 V AC/DC	N/A	1,4 W	4 W	1mA...3A, AC 250V	< 60 s
BFN230	230 V AC	N/A	2,1 W	5 W	1mA...3A, AC 250V	< 60 s
BFN230-ST	230 V AC	N/A	2,1 W	5 W	1mA...3A, AC 250V	< 60 s
RMEX	24...230 V AC / DC	N/A	5 W	20 W	max. 24V/3A, 230V/0,25A	3/15/30/60/120s
RMEXT	24...230 V AC / DC	N/A	5 W	20 W	max. 24V/3A, 230V/0,25A	3/15/30/60/120s
EMEX	24...230 V AC / DC	N/A	5 W	20 W	max. 24V/3A, 230V/0,25A	3/15/30/60/120s
EMEXT	24...230 V AC / DC	N/A	5 W	20 W	max. 24V/3A, 230V/0,25A	3/15/30/60/120s

MEC	Running time spring	Noise level motor	Noise level spring	Cable supply / control	Cable auxiliary switch	Protection class
CFTH	1 s	N/A	N/A			IP 42
ONET 24 FDCU	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONET 24 FDCU ST	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONET 230 FDCU	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONET 230 FDCU ST	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONET 24 FDCB	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	(2x) 1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONET 230 FDCB	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	(2x) 1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONE-X 24	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	bus cable: (2x) 1 m, 4 x 0.75 mm ² (halogen-free)	IP 54
ONE-X 230	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	bus cable: (2x) 1 m, 4 x 0.75 mm ² (halogen-free)	IP 54
BFL24	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFL24-ST	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFL230	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFLT24	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFLT24-ST	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFLT230	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFLT230-ST	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFN24	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFN24-ST	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFN230	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFNT24	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFNT24-ST	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFNT230	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFNT230-ST	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
RMEX	3/10 s					IP 66
RMEXT	3/10 s					IP 66
EMEX	3/10 s					IP 66
EMEXT	3/10 s					IP 66

Weights

Weights

CU2 + CFTH

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	10,8	11,9	12,9	14,0	15,0	16,1	17,1	18,2	19,3	20,3	21,4	22,4	23,5	24,5	25,6
250 kg	11,8	12,9	14,0	15,2	16,3	17,4	18,5	19,7	20,8	21,9	23,0	24,2	25,3	26,4	27,5
300 kg	12,8	14,0	15,2	16,4	17,6	18,7	19,9	21,1	22,3	23,5	24,7	25,9	27,1	28,3	29,4
350 kg	13,8	15,1	16,3	17,6	18,8	20,1	21,3	22,6	23,8	25,1	26,3	27,6	28,9	30,1	29,8
400 kg	14,8	16,1	17,5	18,8	20,1	21,4	22,7	24,0	25,4	26,7	28,0	29,3	30,6	30,4	31,7
450 kg	15,8	17,2	18,6	20,0	21,4	22,7	24,1	25,5	26,9	28,3	29,7	31,0	30,8	32,2	33,6
500 kg	16,8	18,3	19,7	21,2	22,6	24,1	25,5	27,0	28,4	29,9	31,3	31,2	32,6	34,1	35,5
550 kg	17,8	19,3	20,9	22,4	23,9	25,4	26,9	28,4	29,9	31,5	31,4	32,9	34,4	35,9	37,4
600 kg	18,8	20,4	22,0	23,6	25,2	26,7	28,3	29,9	31,5	31,5	33,0	34,6	36,2	37,8	39,3
650 kg	19,8	21,5	23,1	24,8	26,4	28,1	29,7	31,4	31,4	33,0	34,7	36,3	38,0	39,6	41,3
700 kg	20,8	22,6	24,3	26,0	27,7	29,4	31,1	31,2	32,9	34,6	36,3	38,1	39,8	41,5	43,2
750 kg	21,9	23,6	25,4	27,2	29,0	30,7	30,9	32,7	34,5	36,2	38,0	39,8	41,6	43,3	45,1
800 kg	22,9	24,7	26,5	28,4	30,2	30,5	32,3	34,1	36,0	37,8	39,7	41,5	43,3	45,2	47,0
850 kg	23,9	25,8	27,7	29,6	29,9	31,8	33,7	35,6	37,5	39,4	41,3	43,2	45,1	47,0	48,9
900 kg	24,9	26,8	28,8	29,2	31,2	33,1	35,1	37,1	39,0	41,0	43,0	44,9	46,9	48,9	50,9
950 kg	25,9	27,9	28,3	30,4	32,4	34,5	36,5	38,5	40,6	42,6	44,6	46,7	48,7	50,7	52,8
1000 kg	26,9	27,4	29,5	31,6	33,7	35,8	37,9	40,0	42,1	44,2	46,3	48,4	50,5	52,6	54,7

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	26,7	27,7	27,2	28,2	29,3	30,3	31,4	32,5	33,5	34,6	35,6	36,7			
250 kg	28,6	28,2	29,3	30,4	31,5	32,7	33,8	34,9	36,0	37,1	38,3	39,4			
300 kg	29,0	30,2	31,4	32,6	33,8	35,0	36,2	37,3	38,5	39,7	40,9	42,1			
350 kg	31,0	32,3	33,5	34,8	36,0	37,3	38,5	39,8	41,0	42,3	43,5	44,8			
400 kg	33,0	34,3	35,6	36,9	38,3	39,6	40,9	42,2	43,5	44,9	46,2	47,5			
450 kg	35,0	36,4	37,7	39,1	40,5	41,9	43,3	44,7	46,0	47,4	48,8	50,2			
500 kg	37,0	38,4	39,9	41,3	42,8	44,2	45,7	47,1	48,6	50,0	51,4	52,9			
550 kg	38,9	40,5	42,0	43,5	45,0	46,5	48,0	49,5	51,1	52,6	54,1	-			
600 kg	40,9	42,5	44,1	45,7	47,2	48,8	50,4	52,0	53,6	55,1	-	-			
650 kg	42,9	44,6	46,2	47,8	49,5	51,1	52,8	54,4	56,1	-	-	-			
700 kg	44,9	46,6	48,3	50,0	51,7	53,4	55,2	56,9	-	-	-	-			
750 kg	46,9	48,7	50,4	52,2	54,0	55,8	57,5	-	-	-	-	-			
800 kg	48,9	50,7	52,5	54,4	56,2	58,1	-	-	-	-	-	-			
850 kg	50,8	52,8	54,7	56,6	58,5	-	-	-	-	-	-	-			
900 kg	52,8	54,8	56,8	58,7	-	-	-	-	-	-	-	-			
950 kg	54,8	56,9	58,9	-	-	-	-	-	-	-	-	-			
1000 kg	56,8	58,9	-	-	-	-	-	-	-	-	-	-			

CU2 + ONE

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	11,6	12,7	13,7	14,8	15,8	16,9	17,9	19,0	20,1	21,1	22,2	23,2	24,3	25,3	26,4
250 kg	12,6	13,7	14,8	16,0	17,1	18,2	19,3	20,5	21,6	22,7	23,8	25,0	26,1	27,2	28,3
300 kg	13,6	14,8	16,0	17,2	18,4	19,5	20,7	21,9	23,1	24,3	25,5	26,7	27,9	29,1	30,2
350 kg	14,6	15,9	17,1	18,4	19,6	20,9	22,1	23,4	24,6	25,9	27,1	28,4	29,7	30,9	30,6
400 kg	15,6	16,9	18,3	19,6	20,9	22,2	23,5	24,8	26,2	27,5	28,8	30,1	31,4	31,2	32,5
450 kg	16,6	18,0	19,4	20,8	22,2	23,5	24,9	26,3	27,7	29,1	30,5	31,8	31,6	33,0	34,4
500 kg	17,6	19,1	20,5	22,0	23,4	24,9	26,3	27,8	29,2	30,7	32,1	32,0	33,4	34,9	36,3
550 kg	18,6	20,1	21,7	23,2	24,7	26,2	27,7	29,2	30,7	32,3	32,2	33,7	35,2	36,7	38,2
600 kg	19,6	21,2	22,8	24,4	26,0	27,5	29,1	30,7	32,3	32,3	33,8	35,4	37,0	38,6	40,1
650 kg	20,6	22,3	23,9	25,6	27,2	28,9	30,5	32,2	32,2	33,8	35,5	37,1	38,8	40,4	42,1
700 kg	21,6	23,4	25,1	26,8	28,5	30,2	31,9	32,0	33,7	35,4	37,1	38,9	40,6	42,3	44,0
750 kg	22,7	24,4	26,2	28,0	29,8	31,5	31,7	33,5	35,3	37,0	38,8	40,6	42,4	44,1	45,9
800 kg	23,7	25,5	27,3	29,2	31,0	31,3	33,1	34,9	36,8	38,6	40,5	42,3	44,1	46,0	47,8
850 kg	24,7	26,6	28,5	30,4	30,7	32,6	34,5	36,4	38,3	40,2	42,1	44,0	45,9	47,8	49,7
900 kg	25,7	27,6	29,6	30,0	32,0	33,9	35,9	37,9	39,8	41,8	43,8	45,7	47,7	49,7	51,7
950 kg	26,7	28,7	29,1	31,2	33,2	35,3	37,3	39,3	41,4	43,4	45,4	47,5	49,5	51,5	53,6
1000 kg	27,7	28,2	30,3	32,4	34,5	36,6	38,7	40,8	42,9	45,0	47,1	49,2	51,3	53,4	55,5

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	27,5	28,5	28,0	29,0	30,1	31,1	32,2	33,3	34,3	35,4	36,4	37,5			
250 kg	29,4	29,0	30,1	31,2	32,3	33,5	34,6	35,7	36,8	37,9	39,1	40,2			
300 kg	29,8	31,0	32,2	33,4	34,6	35,8	37,0	38,1	39,3	40,5	41,7	42,9			
350 kg	31,8	33,1	34,3	35,6	36,8	38,1	39,3	40,6	41,8	43,1	44,3	45,6			
400 kg	33,8	35,1	36,4	37,7	39,1	40,4	41,7	43,0	44,3	45,7	47,0	48,3			
450 kg	35,8	37,2	38,5	39,9	41,3	42,7	44,1	45,5	46,8	48,2	49,6	51,0			
500 kg	37,8	39,2	40,7	42,1	43,6	45,0	46,5	47,9	49,4	50,8	52,2	53,7			
550 kg	39,7	41,3	42,8	44,3	45,8	47,3	48,8	50,3	51,9	53,4	54,9	56,4			
600 kg	41,7	43,3	44,9	46,5	48,0	49,6	51,2	52,8	54,4	55,9	57,5	59,1			
650 kg	43,7	45,4	47,0	48,6	50,3	51,9	53,6	55,2	56,9	58,5	60,2	61,8			
700 kg	45,7	47,4	49,1	50,8	52,5	54,2	56,0	57,7	59,4	61,1	62,8	64,5			
750 kg	47,7	49,5	51,2	53,0	54,8	56,6	58,3	60,1	61,9	63,7	65,4	67,2			
800 kg	49,7	51,5	53,3	55,2	57,0	58,9	60,7	62,5	64,4	66,2	68,1	69,9			
850 kg	51,6	53,6	55,5	57,4	59,3	61,2	63,1	65,0	66,9	68,8	70,7	72,6			
900 kg	53,6	55,6	57,6	59,5	61,5	63,5	65,5	67,4	69,4	71,4	73,3	75,3			
950 kg	55,6	57,7	59,7	61,7	63,8	65,8	67,8	69,9	71,9	73,9	76,0	78,0			
1000 kg	57,6	59,7	61,8	63,9	66,0	68,1	70,2	72,3	74,4	76,5	78,6	80,7			

CU2 + BFL

CU2 + BFLT

Weights

CU2 + BFN

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	30,1
400 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	30,7	32,0
450 kg	-	-	-	-	-	-	-	-	-	-	-	-	31,2	32,6	33,9
500 kg	-	-	-	-	-	-	-	-	-	-	-	31,5	33,0	34,4	35,9
550 kg	-	-	-	-	-	-	-	-	-	-	31,7	33,2	34,8	36,3	37,8
600 kg	-	-	-	-	-	-	-	-	31,8	33,4	35,0	36,5	38,1	39,7	
650 kg	-	-	-	-	-	-	-	31,8	33,4	35,0	36,7	38,3	40,0	41,6	
700 kg	-	-	-	-	-	-	31,6	33,3	35,0	36,7	38,4	40,1	41,8	43,5	
750 kg	-	-	-	-	-	31,3	33,0	34,8	36,6	38,4	40,1	41,9	43,7	45,5	
800 kg	-	-	-	-	30,8	32,7	34,5	36,3	38,2	40,0	41,9	43,7	45,5	47,4	
850 kg	-	-	-	30,2	32,1	34,0	36,0	37,9	39,8	41,7	43,6	45,5	47,4	49,3	
900 kg	-	-	29,5	31,5	33,5	35,4	37,4	39,4	41,4	43,3	45,3	47,3	49,2	51,2	
950 kg	-	-	28,7	30,7	32,8	34,8	36,8	38,9	40,9	42,9	45,0	47,0	49,1	51,1	53,1
1000 kg	-	27,7	29,8	31,9	34,0	36,1	38,2	40,3	42,4	44,5	46,6	48,7	50,8	52,9	55,0

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	-	-	27,5	28,6	29,6	30,7	31,8	32,8	33,9	34,9	36,0	37,0			
250 kg	-	28,5	29,6	30,8	31,9	33,0	34,1	35,2	36,4	37,5	38,6	39,7			
300 kg	29,4	30,6	31,8	32,9	34,1	35,3	36,5	37,7	38,9	40,1	41,3	42,4			
350 kg	31,4	32,6	33,9	35,1	36,4	37,6	38,9	40,1	41,4	42,6	43,9	45,1			
400 kg	33,3	34,7	36,0	37,3	38,6	39,9	41,3	42,6	43,9	45,2	46,5	47,8			
450 kg	35,3	36,7	38,1	39,5	40,9	42,2	43,6	45,0	46,4	47,8	49,2	50,5			
500 kg	37,3	38,8	40,2	41,7	43,1	44,6	46,0	47,5	48,9	50,4	51,8	53,2			
550 kg	39,3	40,8	42,3	43,8	45,4	46,9	48,4	49,9	51,4	52,9	54,4	55,9			
600 kg	41,3	42,9	44,4	46,0	47,6	49,2	50,8	52,3	53,9	55,5	57,1	58,7			
650 kg	43,3	44,9	46,6	48,2	49,8	51,5	53,1	54,8	56,4	58,1	59,7	61,4			
700 kg	45,2	47,0	48,7	50,4	52,1	53,8	55,5	57,2	58,9	60,6	62,3	64,1			
750 kg	47,2	49,0	50,8	52,6	54,3	56,1	57,9	59,7	61,4	63,2	65,0	66,8			
800 kg	49,2	51,1	52,9	54,7	56,6	58,4	60,3	62,1	63,9	65,8	67,6	69,5			
850 kg	51,2	53,1	55,0	56,9	58,8	60,7	62,6	64,5	66,4	68,3	70,3	72,2			
900 kg	53,2	55,2	57,1	59,1	61,1	63,0	65,0	67,0	68,9	70,9	72,9	74,9			
950 kg	55,2	57,2	59,2	61,3	63,3	65,3	67,4	69,4	71,5	73,5	75,5	77,6			
1000 kg	57,1	59,3	61,4	63,5	65,6	67,7	69,8	71,9	74,0	76,1	78,2	80,3			

CU2 + BFNT

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	30,2
400 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	30,8	32,1
450 kg	-	-	-	-	-	-	-	-	-	-	-	-	31,3	32,7	34,0
500 kg	-	-	-	-	-	-	-	-	-	-	-	31,6	33,1	34,5	36,0
550 kg	-	-	-	-	-	-	-	-	-	-	31,8	33,3	34,9	36,4	37,9
600 kg	-	-	-	-	-	-	-	-	-	31,9	33,5	35,1	36,6	38,2	39,8
650 kg	-	-	-	-	-	-	-	-	31,9	33,5	35,1	36,8	38,4	40,1	41,7
700 kg	-	-	-	-	-	-	-	31,7	33,4	35,1	36,8	38,5	40,2	41,9	43,6
750 kg	-	-	-	-	-	-	31,4	33,1	34,9	36,7	38,5	40,2	42,0	43,8	45,6
800 kg	-	-	-	-	-	30,9	32,8	34,6	36,4	38,3	40,1	42,0	43,8	45,6	47,5
850 kg	-	-	-	-	30,3	32,2	34,1	36,1	38,0	39,9	41,8	43,7	45,6	47,5	49,4
900 kg	-	-	-	29,6	31,6	33,6	35,5	37,5	39,5	41,5	43,4	45,4	47,4	49,3	51,3
950 kg	-	-	28,8	30,8	32,9	34,9	36,9	39,0	41,0	43,0	45,1	47,1	49,2	51,2	53,2
1000 kg	-	27,8	29,9	32,0	34,1	36,2	38,3	40,4	42,5	44,6	46,7	48,8	50,9	53,0	55,1

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	-	-	27,6	28,7	29,7	30,8	31,9	32,9	34,0	35,0	36,1	37,1			
250 kg	-	28,6	29,7	30,9	32,0	33,1	34,2	35,3	36,5	37,6	38,7	39,8			
300 kg	29,5	30,7	31,9	33,0	34,2	35,4	36,6	37,8	39,0	40,2	41,4	42,5			
350 kg	31,5	32,7	34,0	35,2	36,5	37,7	39,0	40,2	41,5	42,7	44,0	45,2			
400 kg	33,4	34,8	36,1	37,4	38,7	40,0	41,4	42,7	44,0	45,3	46,6	47,9			
450 kg	35,4	36,8	38,2	39,6	41,0	42,3	43,7	45,1	46,5	47,9	49,3	50,6			
500 kg	37,4	38,9	40,3	41,8	43,2	44,7	46,1	47,6	49,0	50,5	51,9	53,3			
550 kg	39,4	40,9	42,4	43,9	45,5	47,0	48,5	50,0	51,5	53,0	54,5	56,0			
600 kg	41,4	43,0	44,5	46,1	47,7	49,3	50,9	52,4	54,0	55,6	57,2	58,8			
650 kg	43,4	45,0	46,7	48,3	49,9	51,6	53,2	54,9	56,5	58,2	59,8	61,5			
700 kg	45,3	47,1	48,8	50,5	52,2	53,9	55,6	57,3	59,0	60,7	62,4	64,2			
750 kg	47,3	49,1	50,9	52,7	54,4	56,2	58,0	59,8	61,5	63,3	65,1	66,9			
800 kg	49,3	51,2	53,0	54,8	56,7	58,5	60,4	62,2	64,0	65,9	67,7	69,6			
850 kg	51,3	53,2	55,1	57,0	58,9	60,8	62,7	64,6	66,5	68,4	70,4	72,3			
900 kg	53,3	55,3	57,2	59,2	61,2	63,1	65,1	67,1	69,0	71,0	73,0	75,0			
950 kg	55,3	57,3	59,3	61,4	63,4	65,4	67,5	69,5	71,6	73,6	75,6	77,7			
1000 kg	57,2	59,4	61,5	63,6	65,7	67,8	69,9	72,0	74,1	76,2	78,3	80,4			

Weights

CU2-L500 + CFTH

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	11,6	12,8	13,9	15,1	16,2	17,4	18,6	19,7	20,9	22,0	23,2	24,3	25,5	26,6	27,8
250 kg	12,7	14,0	15,2	16,4	17,6	18,9	20,1	21,3	22,5	23,8	25,0	26,2	27,4	28,7	29,9
300 kg	13,8	15,1	16,4	17,7	19,0	20,3	21,6	22,9	24,2	25,5	26,8	28,1	29,4	30,7	32,0
350 kg	14,9	16,3	17,7	19,0	20,4	21,8	23,1	24,5	25,9	27,2	28,6	30,0	31,4	32,7	32,3
400 kg	16,0	17,5	18,9	20,3	21,8	23,2	24,7	26,1	27,5	29,0	30,4	31,9	33,3	33,0	34,4
450 kg	17,1	18,6	20,1	21,7	23,2	24,7	26,2	27,7	29,2	30,7	32,2	33,7	33,5	35,0	36,5
500 kg	18,2	19,8	21,4	23,0	24,6	26,1	27,7	29,3	30,9	32,5	34,0	33,9	35,5	37,0	38,6
550 kg	19,3	21,0	22,6	24,3	25,9	27,6	29,2	30,9	32,5	34,2	34,1	35,8	37,4	39,1	40,7
600 kg	20,4	22,1	23,9	25,6	27,3	29,0	30,8	32,5	34,2	34,2	35,9	37,6	39,4	41,1	42,8
650 kg	21,5	23,3	25,1	26,9	28,7	30,5	32,3	34,1	34,1	35,9	37,7	39,5	41,3	43,1	44,9
700 kg	22,6	24,5	26,3	28,2	30,1	31,9	33,8	33,9	35,8	37,7	39,5	41,4	43,3	45,1	47,0
750 kg	23,7	25,6	27,6	29,5	31,5	33,4	33,6	35,5	37,5	39,4	41,4	43,3	45,2	47,2	49,1
800 kg	24,8	26,8	28,8	30,8	32,9	33,1	35,1	37,1	39,1	41,2	43,2	45,2	47,2	49,2	51,2
850 kg	25,9	28,0	30,1	32,2	32,5	34,6	36,6	38,7	40,8	42,9	45,0	47,1	49,1	51,2	53,3
900 kg	27,0	29,2	31,3	31,7	33,9	36,0	38,2	40,3	42,5	44,6	46,8	48,9	51,1	53,3	55,4
950 kg	28,1	30,3	30,8	33,0	35,2	37,5	39,7	41,9	44,2	46,4	48,6	50,8	53,0	55,3	57,5
1000 kg	29,2	29,8	32,0	34,3	36,6	38,9	41,2	43,5	45,8	48,1	50,4	52,7	55,0	57,3	59,6

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	29,0	30,1	29,5	30,7	31,8	33,0	34,1	35,3	36,4	37,6	38,8	39,9			
250 kg	31,1	30,6	31,8	33,1	34,3	35,5	36,7	38,0	39,2	40,4	41,6	42,9			
300 kg	31,5	32,8	34,1	35,4	36,7	38,0	39,3	40,6	41,9	43,2	44,5	45,8			
350 kg	33,7	35,1	36,4	37,8	39,2	40,6	41,9	43,3	44,7	46,0	47,4	48,8			
400 kg	35,9	37,3	38,8	40,2	41,6	43,1	44,5	46,0	47,4	48,8	50,3	51,7			
450 kg	38,0	39,6	41,1	42,6	44,1	45,6	47,1	48,6	50,1	51,6	53,2	54,7			
500 kg	40,2	41,8	43,4	45,0	46,5	48,1	49,7	51,3	52,9	54,5	56,0	57,6			
550 kg	42,4	44,0	45,7	47,3	49,0	50,7	52,3	54,0	55,6	57,3	58,9	-			
600 kg	44,5	46,3	48,0	49,7	51,4	53,2	54,9	56,6	58,4	60,1	-	-			
650 kg	46,7	48,5	50,3	52,1	53,9	55,7	57,5	59,3	61,1	-	-	-			
700 kg	48,9	50,7	52,6	54,5	56,4	58,2	60,1	62,0	-	-	-	-			
750 kg	51,1	53,0	54,9	56,9	58,8	60,7	62,7	-	-	-	-	-			
800 kg	53,2	55,2	57,2	59,2	61,3	63,3	-	-	-	-	-	-			
850 kg	55,4	57,5	59,5	61,6	63,7	-	-	-	-	-	-	-			
900 kg	57,6	59,7	61,9	64,0	-	-	-	-	-	-	-	-			
950 kg	59,7	61,9	64,2	-	-	-	-	-	-	-	-	-			
1000 kg	61,9	64,2	-	-	-	-	-	-	-	-	-	-			

CU2-L500 + ONE

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	12,4	13,6	14,7	15,9	17,0	18,2	19,4	20,5	21,7	22,8	24,0	25,1	26,3	27,4	28,6
250 kg	13,5	14,8	16,0	17,2	18,4	19,7	20,9	22,1	23,3	24,6	25,8	27,0	28,2	29,5	30,7
300 kg	14,6	15,9	17,2	18,5	19,8	21,1	22,4	23,7	25,0	26,3	27,6	28,9	30,2	31,5	32,8
350 kg	15,7	17,1	18,5	19,8	21,2	22,6	23,9	25,3	26,7	28,0	29,4	30,8	32,2	33,5	33,1
400 kg	16,8	18,3	19,7	21,1	22,6	24,0	25,5	26,9	28,3	29,8	31,2	32,7	34,1	33,8	35,2
450 kg	17,9	19,4	20,9	22,5	24,0	25,5	27,0	28,5	30,0	31,5	33,0	34,5	34,3	35,8	37,3
500 kg	19,0	20,6	22,2	23,8	25,4	26,9	28,5	30,1	31,7	33,3	34,8	34,7	36,3	37,8	39,4
550 kg	20,1	21,8	23,4	25,1	26,7	28,4	30,0	31,7	33,3	35,0	34,9	36,6	38,2	39,9	41,5
600 kg	21,2	22,9	24,7	26,4	28,1	29,8	31,6	33,3	35,0	35,0	36,7	38,4	40,2	41,9	43,6
650 kg	22,3	24,1	25,9	27,7	29,5	31,3	33,1	34,9	34,9	36,7	38,5	40,3	42,1	43,9	45,7
700 kg	23,4	25,3	27,1	29,0	30,9	32,7	34,6	34,7	36,6	38,5	40,3	42,2	44,1	45,9	47,8
750 kg	24,5	26,4	28,4	30,3	32,3	34,2	34,4	36,3	38,3	40,2	42,2	44,1	46,0	48,0	49,9
800 kg	25,6	27,6	29,6	31,6	33,7	33,9	35,9	37,9	39,9	42,0	44,0	46,0	48,0	50,0	52,0
850 kg	26,7	28,8	30,9	33,0	33,3	35,4	37,4	39,5	41,6	43,7	45,8	47,9	49,9	52,0	54,1
900 kg	27,8	30,0	32,1	32,5	34,7	36,8	39,0	41,1	43,3	45,4	47,6	49,7	51,9	54,1	56,2
950 kg	28,9	31,1	31,6	33,8	36,0	38,3	40,5	42,7	45,0	47,2	49,4	51,6	53,8	56,1	58,3
1000 kg	30,0	30,6	32,8	35,1	37,4	39,7	42,0	44,3	46,6	48,9	51,2	53,5	55,8	58,1	60,4

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	29,8	30,9	30,3	31,5	32,6	33,8	34,9	36,1	37,2	38,4	39,6	40,7			
250 kg	31,9	31,4	32,6	33,9	35,1	36,3	37,5	38,8	40,0	41,2	42,4	43,7			
300 kg	32,3	33,6	34,9	36,2	37,5	38,8	40,1	41,4	42,7	44,0	45,3	46,6			
350 kg	34,5	35,9	37,2	38,6	40,0	41,4	42,7	44,1	45,5	46,8	48,2	49,6			
400 kg	36,7	38,1	39,6	41,0	42,4	43,9	45,3	46,8	48,2	49,6	51,1	52,5			
450 kg	38,8	40,4	41,9	43,4	44,9	46,4	47,9	49,4	50,9	52,4	54,0	55,5			
500 kg	41,0	42,6	44,2	45,8	47,3	48,9	50,5	52,1	53,7	55,3	56,8	58,4			
550 kg	43,2	44,8	46,5	48,1	49,8	51,5	53,1	54,8	56,4	58,1	59,7	61,4			
600 kg	45,3	47,1	48,8	50,5	52,2	54,0	55,7	57,4	59,2	60,9	62,6	64,3			
650 kg	47,5	49,3	51,1	52,9	54,7	56,5	58,3	60,1	61,9	63,7	65,5	67,3			
700 kg	49,7	51,5	53,4	55,3	57,2	59,0	60,9	62,8	64,6	66,5	68,4	70,2			
750 kg	51,9	53,8	55,7	57,7	59,6	61,5	63,5	65,4	67,4	69,3	71,2	73,2			
800 kg	54,0	56,0	58,0	60,0	62,1	64,1	66,1	68,1	70,1	72,1	74,1	76,1			
850 kg	56,2	58,3	60,3	62,4	64,5	66,6	68,7	70,8	72,8	74,9	77,0	79,1			
900 kg	58,4	60,5	62,7	64,8	67,0	69,1	71,3	73,4	75,6	77,7	79,9	82,0			
950 kg	60,5	62,7	65,0	67,2	69,4	71,6	73,9	76,1	78,3	80,5	82,8	85,0			
1000 kg	62,7	65,0	67,3	69,6	71,9	74,2	76,5	78,8	81,1	83,4	85,6	87,9			

CU2-L500 + BFL

CU2-L500 + BFLT

Weights

CU2-L500 + BFN

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	32,7
400 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	33,3	34,8
450 kg	-	-	-	-	-	-	-	-	-	-	-	-	33,9	35,4	36,9
500 kg	-	-	-	-	-	-	-	-	-	-	-	34,2	35,8	37,4	39,0
550 kg	-	-	-	-	-	-	-	-	-	-	34,5	36,1	37,8	39,4	41,1
600 kg	-	-	-	-	-	-	-	-	-	34,5	36,3	38,0	39,7	41,5	43,2
650 kg	-	-	-	-	-	-	-	-	34,5	36,3	38,1	39,9	41,7	43,5	45,3
700 kg	-	-	-	-	-	-	-	34,3	36,2	38,0	39,9	41,8	43,6	45,5	47,4
750 kg	-	-	-	-	-	-	33,9	35,9	37,8	39,8	41,7	43,6	45,6	47,5	49,5
800 kg	-	-	-	-	-	33,5	35,5	37,5	39,5	41,5	43,5	45,5	47,5	49,5	51,6
850 kg	-	-	-	-	32,8	34,9	37,0	39,1	41,2	43,2	45,3	47,4	49,5	51,6	53,7
900 kg	-	-	-	32,1	34,2	36,4	38,5	40,7	42,8	45,0	47,1	49,3	51,4	53,6	55,8
950 kg	-	-	31,1	33,4	35,6	37,8	40,1	42,3	44,5	46,7	48,9	51,2	53,4	55,6	57,8
1000 kg	-	30,1	32,4	34,7	37,0	39,3	41,6	43,9	46,2	48,5	50,8	53,1	55,3	57,6	59,9

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	-	-	29,9	31,0	32,2	33,3	34,5	35,6	36,8	38,0	39,1	40,3			
250 kg	-	31,0	32,2	33,4	34,6	35,9	37,1	38,3	39,5	40,8	42,0	43,2			
300 kg	31,9	33,2	34,5	35,8	37,1	38,4	39,7	41,0	42,3	43,6	44,9	46,2			
350 kg	34,1	35,4	36,8	38,2	39,5	40,9	42,3	43,6	45,0	46,4	47,8	49,1			
400 kg	36,2	37,7	39,1	40,5	42,0	43,4	44,9	46,3	47,8	49,2	50,6	52,1			
450 kg	38,4	39,9	41,4	42,9	44,4	46,0	47,5	49,0	50,5	52,0	53,5	55,0			
500 kg	40,6	42,2	43,7	45,3	46,9	48,5	50,1	51,6	53,2	54,8	56,4	58,0			
550 kg	42,7	44,4	46,0	47,7	49,4	51,0	52,7	54,3	56,0	57,6	59,3	60,9			
600 kg	44,9	46,6	48,3	50,1	51,8	53,5	55,3	57,0	58,7	60,4	62,2	63,9			
650 kg	47,1	48,9	50,7	52,5	54,3	56,0	57,9	59,6	61,4	63,2	65,0	66,8			
700 kg	49,2	51,1	53,0	54,8	56,7	58,6	60,4	62,3	64,2	66,0	67,9	69,8			
750 kg	51,4	53,3	55,3	57,2	59,2	61,1	63,0	65,0	66,9	68,9	70,8	72,7			
800 kg	53,6	55,6	57,6	59,6	61,6	63,6	65,6	67,6	69,6	71,7	73,7	75,7			
850 kg	55,7	57,8	59,9	62,0	64,1	66,1	68,2	70,3	72,4	74,5	76,6	78,6			
900 kg	57,9	60,1	62,2	64,4	66,5	68,7	70,8	73,0	75,1	77,3	79,4	81,6			
950 kg	60,1	62,3	64,5	66,7	69,0	71,2	73,4	75,6	77,9	80,1	82,3	84,5			
1000 kg	62,2	64,5	66,8	69,1	71,4	73,7	76,0	78,3	80,6	82,9	85,2	87,5			

CU2-L500 + BFNT

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	32,8
400 kg	-	-	-	-	-	-	-	-	-	-	-	-	-	33,4	34,9
450 kg	-	-	-	-	-	-	-	-	-	-	-	-	34,0	35,5	37,0
500 kg	-	-	-	-	-	-	-	-	-	-	-	34,3	35,9	37,5	39,1
550 kg	-	-	-	-	-	-	-	-	-	-	34,6	36,2	37,9	39,5	41,2
600 kg	-	-	-	-	-	-	-	-	-	34,6	36,4	38,1	39,8	41,6	43,3
650 kg	-	-	-	-	-	-	-	-	34,6	36,4	38,2	40,0	41,8	43,6	45,4
700 kg	-	-	-	-	-	-	-	34,4	36,3	38,1	40,0	41,9	43,7	45,6	47,5
750 kg	-	-	-	-	-	-	34,0	36,0	37,9	39,9	41,8	43,7	45,7	47,6	49,6
800 kg	-	-	-	-	-	33,6	35,6	37,6	39,6	41,6	43,6	45,6	47,6	49,6	51,7
850 kg	-	-	-	-	32,9	35,0	37,1	39,2	41,3	43,3	45,4	47,5	49,6	51,7	53,8
900 kg	-	-	-	32,2	34,3	36,5	38,6	40,8	42,9	45,1	47,2	49,4	51,5	53,7	55,9
950 kg	-	-	31,2	33,5	35,7	37,9	40,2	42,4	44,6	46,8	49,0	51,3	53,5	55,7	57,9
1000 kg	-	30,2	32,5	34,8	37,1	39,4	41,7	44,0	46,3	48,6	50,9	53,2	55,4	57,7	60,0

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	-	-	30,0	31,1	32,3	33,4	34,6	35,7	36,9	38,1	39,2	40,4			
250 kg	-	31,1	32,3	33,5	34,7	36,0	37,2	38,4	39,6	40,9	42,1	43,3			
300 kg	32,0	33,3	34,6	35,9	37,2	38,5	39,8	41,1	42,4	43,7	45,0	46,3			
350 kg	34,2	35,5	36,9	38,3	39,6	41,0	42,4	43,7	45,1	46,5	47,9	49,2			
400 kg	36,3	37,8	39,2	40,6	42,1	43,5	45,0	46,4	47,9	49,3	50,7	52,2			
450 kg	38,5	40,0	41,5	43,0	44,5	46,1	47,6	49,1	50,6	52,1	53,6	55,1			
500 kg	40,7	42,3	43,8	45,4	47,0	48,6	50,2	51,7	53,3	54,9	56,5	58,1			
550 kg	42,8	44,5	46,1	47,8	49,5	51,1	52,8	54,4	56,1	57,7	59,4	61,0			
600 kg	45,0	46,7	48,4	50,2	51,9	53,6	55,4	57,1	58,8	60,5	62,3	64,0			
650 kg	47,2	49,0	50,8	52,6	54,4	56,1	58,0	59,7	61,5	63,3	65,1	66,9			
700 kg	49,3	51,2	53,1	54,9	56,8	58,7	60,5	62,4	64,3	66,1	68,0	69,9			
750 kg	51,5	53,4	55,4	57,3	59,3	61,2	63,1	65,1	67,0	69,0	70,9	72,8			
800 kg	53,7	55,7	57,7	59,7	61,7	63,7	65,7	67,7	69,7	71,8	73,8	75,8			
850 kg	55,8	57,9	60,0	62,1	64,2	66,2	68,3	70,4	72,5	74,6	76,7	78,7			
900 kg	58,0	60,2	62,3	64,5	66,6	68,8	70,9	73,1	75,2	77,4	79,5	81,7			
950 kg	60,2	62,4	64,6	66,8	69,1	71,3	73,5	75,7	78,0	80,2	82,4	84,6			
1000 kg	62,3	64,6	66,9	69,2	71,5	73,8	76,1	78,4	80,7	83,0	85,3	87,6			

Weights

CU2 ATEX + RMEX

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	14,8	15,8	16,9	18,0	19,0	20,1	21,1	22,2	23,2	24,3	25,4	26,4	27,5	28,5	29,6
250 kg	15,8	16,9	18,0	19,2	20,3	21,4	22,5	23,7	24,8	25,9	27,0	28,1	29,3	30,4	31,5
300 kg	16,8	18,0	19,2	20,4	21,5	22,7	23,9	25,1	26,3	27,5	28,7	29,9	31,1	32,2	33,4
350 kg	17,8	19,1	20,3	21,6	22,8	24,1	25,3	26,6	27,8	29,1	30,3	31,6	32,8	34,1	33,7
400 kg	18,8	20,1	21,4	22,8	24,1	25,4	26,7	28,0	29,4	30,7	32,0	33,3	34,6	34,3	35,7
450 kg	19,8	21,2	22,6	24,0	25,3	26,7	28,1	29,5	30,9	32,3	33,6	35,0	34,8	36,2	37,6
500 kg	20,8	22,3	23,7	25,2	26,6	28,1	29,5	31,0	32,4	33,9	35,3	35,2	36,6	38,1	39,5
550 kg	21,8	23,3	24,9	26,4	27,9	29,4	30,9	32,4	33,9	35,5	35,4	36,9	38,4	39,9	41,4
600 kg	22,8	24,4	26,0	27,6	29,1	30,7	32,3	33,9	35,5	35,4	37,0	38,6	40,2	41,8	43,3
650 kg	23,8	25,5	27,1	28,8	30,4	32,1	33,7	35,3	35,4	37,0	38,7	40,3	42,0	43,6	45,3
700 kg	24,8	26,5	28,3	30,0	31,7	33,4	35,1	35,2	36,9	38,6	40,3	42,0	43,8	45,5	47,2
750 kg	25,8	27,6	29,4	31,2	32,9	34,7	34,9	36,7	38,4	40,2	42,0	43,8	45,5	47,3	49,1
800 kg	26,8	28,7	30,5	32,4	34,2	34,5	36,3	38,1	40,0	41,8	43,7	45,5	47,3	49,2	51,0
850 kg	27,9	29,8	31,7	33,6	33,9	35,8	37,7	39,6	41,5	43,4	45,3	47,2	49,1	51,0	52,9
900 kg	28,9	30,8	32,8	33,2	35,1	37,1	39,1	41,1	43,0	45,0	47,0	48,9	50,9	52,9	54,9
950 kg	29,9	31,9	32,3	34,4	36,4	38,4	40,5	42,5	44,6	46,6	48,6	50,7	52,7	54,7	56,8
1000 kg	30,9	31,4	33,5	35,6	37,7	39,8	41,9	44,0	46,1	48,2	50,3	52,4	54,5	56,6	58,7

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	30,6	31,7	31,2	32,2	33,3	34,3	35,4	36,4	37,5	38,6	39,6	40,7			
250 kg	32,6	32,2	33,3	34,4	35,5	36,6	37,8	38,9	40,0	41,1	42,3	43,4			
300 kg	33,0	34,2	35,4	36,6	37,8	39,0	40,1	41,3	42,5	43,7	44,9	46,1			
350 kg	35,0	36,3	37,5	38,8	40,0	41,3	42,5	43,8	45,0	46,3	47,5	48,8			
400 kg	37,0	38,3	39,6	40,9	42,3	43,6	44,9	46,2	47,5	48,8	50,2	51,5			
450 kg	39,0	40,4	41,7	43,1	44,5	45,9	47,3	48,7	50,0	51,4	52,8	54,2			
500 kg	41,0	42,4	43,8	45,3	46,7	48,2	49,6	51,1	52,5	54,0	55,4	56,9			
550 kg	42,9	44,4	46,0	47,5	49,0	50,5	52,0	53,5	55,0	56,6	58,1	59,6			
600 kg	44,9	46,5	48,1	49,7	51,2	52,8	54,4	56,0	57,6	59,1	60,7	62,3			
650 kg	46,9	48,5	50,2	51,8	53,5	55,1	56,8	58,4	60,1	61,7	63,3	65,0			
700 kg	48,9	50,6	52,3	54,0	55,7	57,4	59,1	60,9	62,6	64,3	66,0	67,7			
750 kg	50,9	52,6	54,4	56,2	58,0	59,7	61,5	63,3	65,1	66,8	68,6	70,4			
800 kg	52,9	54,7	56,5	58,4	60,2	62,1	63,9	65,7	67,6	69,4	71,3	73,1			
850 kg	54,8	56,7	58,6	60,6	62,5	64,4	66,3	68,2	70,1	72,0	73,9	75,8			
900 kg	56,8	58,8	60,8	62,7	64,7	66,7	68,6	70,6	72,6	74,6	76,5	78,5			
950 kg	58,8	60,8	62,9	64,9	67,0	69,0	71,0	73,1	75,1	77,1	79,2	81,2			
1000 kg	60,8	62,9	65,0	67,1	69,2	71,3	73,4	75,5	77,6	79,7	81,8	83,9			

CU2 ATEX + RMEXT

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	14,9	15,9	17,0	18,1	19,1	20,2	21,2	22,3	23,3	24,4	25,5	26,5	27,6	28,6	29,7
250 kg	15,9	17,0	18,1	19,3	20,4	21,5	22,6	23,8	24,9	26,0	27,1	28,2	29,4	30,5	31,6
300 kg	16,9	18,1	19,3	20,5	21,6	22,8	24,0	25,2	26,4	27,6	28,8	30,0	31,2	32,3	33,5
350 kg	17,9	19,2	20,4	21,7	22,9	24,2	25,4	26,7	27,9	29,2	30,4	31,7	32,9	34,2	33,8
400 kg	18,9	20,2	21,5	22,9	24,2	25,5	26,8	28,1	29,5	30,8	32,1	33,4	34,7	34,4	35,8
450 kg	19,9	21,3	22,7	24,1	25,4	26,8	28,2	29,6	31,0	32,4	33,7	35,1	34,9	36,3	37,7
500 kg	20,9	22,4	23,8	25,3	26,7	28,2	29,6	31,1	32,5	34,0	35,4	35,3	36,7	38,2	39,6
550 kg	21,9	23,4	25,0	26,5	28,0	29,5	31,0	32,5	34,0	35,6	35,5	37,0	38,5	40,0	41,5
600 kg	22,9	24,5	26,1	27,7	29,2	30,8	32,4	34,0	35,6	35,5	37,1	38,7	40,3	41,9	43,4
650 kg	23,9	25,6	27,2	28,9	30,5	32,2	33,8	35,4	35,5	37,1	38,8	40,4	42,1	43,7	45,4
700 kg	24,9	26,6	28,4	30,1	31,8	33,5	35,2	35,3	37,0	38,7	40,4	42,1	43,9	45,6	47,3
750 kg	25,9	27,7	29,5	31,3	33,0	34,8	35,0	36,8	38,5	40,3	42,1	43,9	45,6	47,4	49,2
800 kg	26,9	28,8	30,6	32,5	34,3	34,6	36,4	38,2	40,1	41,9	43,8	45,6	47,4	49,3	51,1
850 kg	28,0	29,9	31,8	33,7	34,0	35,9	37,8	39,7	41,6	43,5	45,4	47,3	49,2	51,1	53,0
900 kg	29,0	30,9	32,9	33,3	35,2	37,2	39,2	41,2	43,1	45,1	47,1	49,0	51,0	53,0	55,0
950 kg	30,0	32,0	32,4	34,5	36,5	38,5	40,6	42,6	44,7	46,7	48,7	50,8	52,8	54,8	56,9
1000 kg	31,0	31,5	33,6	35,7	37,8	39,9	42,0	44,1	46,2	48,3	50,4	52,5	54,6	56,7	58,8

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	30,7	31,8	31,3	32,3	33,4	34,4	35,5	36,5	37,6	38,7	39,7	40,8			
250 kg	32,7	32,3	33,4	34,5	35,6	36,7	37,9	39,0	40,1	41,2	42,4	43,5			
300 kg	33,1	34,3	35,5	36,7	37,9	39,1	40,2	41,4	42,6	43,8	45,0	46,2			
350 kg	35,1	36,4	37,6	38,9	40,1	41,4	42,6	43,9	45,1	46,4	47,6	48,9			
400 kg	37,1	38,4	39,7	41,0	42,4	43,7	45,0	46,3	47,6	48,9	50,3	51,6			
450 kg	39,1	40,5	41,8	43,2	44,6	46,0	47,4	48,8	50,1	51,5	52,9	54,3			
500 kg	41,1	42,5	43,9	45,4	46,8	48,3	49,7	51,2	52,6	54,1	55,5	57,0			
550 kg	43,0	44,5	46,1	47,6	49,1	50,6	52,1	53,6	55,1	56,7	58,2	59,7			
600 kg	45,0	46,6	48,2	49,8	51,3	52,9	54,5	56,1	57,7	59,2	60,8	62,4			
650 kg	47,0	48,6	50,3	51,9	53,6	55,2	56,9	58,5	60,2	61,8	63,4	65,1			
700 kg	49,0	50,7	52,4	54,1	55,8	57,5	59,2	61,0	62,7	64,4	66,1	67,8			
750 kg	51,0	52,7	54,5	56,3	58,1	59,8	61,6	63,4	65,2	66,9	68,7	70,5			
800 kg	53,0	54,8	56,6	58,5	60,3	62,2	64,0	65,8	67,7	69,5	71,4	73,2			
850 kg	54,9	56,8	58,7	60,7	62,6	64,5	66,4	68,3	70,2	72,1	74,0	75,9			
900 kg	56,9	58,9	60,9	62,8	64,8	66,8	68,7	70,7	72,7	74,7	76,6	78,6			
950 kg	58,9	60,9	63,0	65,0	67,1	69,1	71,1	73,2	75,2	77,2	79,3	81,3			
1000 kg	60,9	63,0	65,1	67,2	69,3	71,4	73,5	75,6	77,7	79,8	81,9	84,0			

Weights

CU2 ATEX + EMEX

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	14,8	15,8	16,9	18,0	19,0	20,1	21,1	22,2	23,2	24,3	25,4	26,4	27,5	28,5	29,6
250 kg	15,8	16,9	18,0	19,2	20,3	21,4	22,5	23,7	24,8	25,9	27,0	28,1	29,3	30,4	31,5
300 kg	16,8	18,0	19,2	20,4	21,5	22,7	23,9	25,1	26,3	27,5	28,7	29,9	31,1	32,2	33,4
350 kg	17,8	19,1	20,3	21,6	22,8	24,1	25,3	26,6	27,8	29,1	30,3	31,6	32,8	34,1	33,7
400 kg	18,8	20,1	21,4	22,8	24,1	25,4	26,7	28,0	29,4	30,7	32,0	33,3	34,6	34,3	35,7
450 kg	19,8	21,2	22,6	24,0	25,3	26,7	28,1	29,5	30,9	32,3	33,6	35,0	34,8	36,2	37,6
500 kg	20,8	22,3	23,7	25,2	26,6	28,1	29,5	31,0	32,4	33,9	35,3	35,2	36,6	38,1	39,5
550 kg	21,8	23,3	24,9	26,4	27,9	29,4	30,9	32,4	33,9	35,5	35,4	36,9	38,4	39,9	41,4
600 kg	22,8	24,4	26,0	27,6	29,1	30,7	32,3	33,9	35,5	35,4	37,0	38,6	40,2	41,8	43,3
650 kg	23,8	25,5	27,1	28,8	30,4	32,1	33,7	35,3	35,4	37,0	38,7	40,3	42,0	43,6	45,3
700 kg	24,8	26,5	28,3	30,0	31,7	33,4	35,1	35,2	36,9	38,6	40,3	42,0	43,8	45,5	47,2
750 kg	25,8	27,6	29,4	31,2	32,9	34,7	34,9	36,7	38,4	40,2	42,0	43,8	45,5	47,3	49,1
800 kg	26,8	28,7	30,5	32,4	34,2	34,5	36,3	38,1	40,0	41,8	43,7	45,5	47,3	49,2	51,0
850 kg	27,9	29,8	31,7	33,6	33,9	35,8	37,7	39,6	41,5	43,4	45,3	47,2	49,1	51,0	52,9
900 kg	28,9	30,8	32,8	33,2	35,1	37,1	39,1	41,1	43,0	45,0	47,0	48,9	50,9	52,9	54,9
950 kg	29,9	31,9	32,3	34,4	36,4	38,4	40,5	42,5	44,6	46,6	48,6	50,7	52,7	54,7	56,8
1000 kg	30,9	31,4	33,5	35,6	37,7	39,8	41,9	44,0	46,1	48,2	50,3	52,4	54,5	56,6	58,7

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	30,6	31,7	31,2	32,2	33,3	34,3	35,4	36,4	37,5	38,6	39,6	40,7			
250 kg	32,6	32,2	33,3	34,4	35,5	36,6	37,8	38,9	40,0	41,1	42,3	43,4			
300 kg	33,0	34,2	35,4	36,6	37,8	39,0	40,1	41,3	42,5	43,7	44,9	46,1			
350 kg	35,0	36,3	37,5	38,8	40,0	41,3	42,5	43,8	45,0	46,3	47,5	48,8			
400 kg	37,0	38,3	39,6	40,9	42,3	43,6	44,9	46,2	47,5	48,8	50,2	51,5			
450 kg	39,0	40,4	41,7	43,1	44,5	45,9	47,3	48,7	50,0	51,4	52,8	54,2			
500 kg	41,0	42,4	43,8	45,3	46,7	48,2	49,6	51,1	52,5	54,0	55,4	56,9			
550 kg	42,9	44,4	46,0	47,5	49,0	50,5	52,0	53,5	55,0	56,6	58,1	59,6			
600 kg	44,9	46,5	48,1	49,7	51,2	52,8	54,4	56,0	57,6	59,1	60,7	62,3			
650 kg	46,9	48,5	50,2	51,8	53,5	55,1	56,8	58,4	60,1	61,7	63,3	65,0			
700 kg	48,9	50,6	52,3	54,0	55,7	57,4	59,1	60,9	62,6	64,3	66,0	67,7			
750 kg	50,9	52,6	54,4	56,2	58,0	59,7	61,5	63,3	65,1	66,8	68,6	70,4			
800 kg	52,9	54,7	56,5	58,4	60,2	62,1	63,9	65,7	67,6	69,4	71,3	73,1			
850 kg	54,8	56,7	58,6	60,6	62,5	64,4	66,3	68,2	70,1	72,0	73,9	75,8			
900 kg	56,8	58,8	60,8	62,7	64,7	66,7	68,6	70,6	72,6	74,6	76,5	78,5			
950 kg	58,8	60,8	62,9	64,9	67,0	69,0	71,0	73,1	75,1	77,1	79,2	81,2			
1000 kg	60,8	62,9	65,0	67,1	69,2	71,3	73,4	75,5	77,6	79,7	81,8	83,9			

CU2 ATEX + EMEXT

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200 kg	14,9	15,9	17,0	18,1	19,1	20,2	21,2	22,3	23,3	24,4	25,5	26,5	27,6	28,6	29,7
250 kg	15,9	17,0	18,1	19,3	20,4	21,5	22,6	23,8	24,9	26,0	27,1	28,2	29,4	30,5	31,6
300 kg	16,9	18,1	19,3	20,5	21,6	22,8	24,0	25,2	26,4	27,6	28,8	30,0	31,2	32,3	33,5
350 kg	17,9	19,2	20,4	21,7	22,9	24,2	25,4	26,7	27,9	29,2	30,4	31,7	32,9	34,2	33,8
400 kg	18,9	20,2	21,5	22,9	24,2	25,5	26,8	28,1	29,5	30,8	32,1	33,4	34,7	34,4	35,8
450 kg	19,9	21,3	22,7	24,1	25,4	26,8	28,2	29,6	31,0	32,4	33,7	35,1	34,9	36,3	37,7
500 kg	20,9	22,4	23,8	25,3	26,7	28,2	29,6	31,1	32,5	34,0	35,4	35,3	36,7	38,2	39,6
550 kg	21,9	23,4	25,0	26,5	28,0	29,5	31,0	32,5	34,0	35,6	35,5	37,0	38,5	40,0	41,5
600 kg	22,9	24,5	26,1	27,7	29,2	30,8	32,4	34,0	35,6	35,5	37,1	38,7	40,3	41,9	43,4
650 kg	23,9	25,6	27,2	28,9	30,5	32,2	33,8	35,4	35,5	37,1	38,8	40,4	42,1	43,7	45,4
700 kg	24,9	26,6	28,4	30,1	31,8	33,5	35,2	35,3	37,0	38,7	40,4	42,1	43,9	45,6	47,3
750 kg	25,9	27,7	29,5	31,3	33,0	34,8	35,0	36,8	38,5	40,3	42,1	43,9	45,6	47,4	49,2
800 kg	26,9	28,8	30,6	32,5	34,3	34,6	36,4	38,2	40,1	41,9	43,8	45,6	47,4	49,3	51,1
850 kg	28,0	29,9	31,8	33,7	34,0	35,9	37,8	39,7	41,6	43,5	45,4	47,3	49,2	51,1	53,0
900 kg	29,0	30,9	32,9	33,3	35,2	37,2	39,2	41,2	43,1	45,1	47,1	49,0	51,0	53,0	55,0
950 kg	30,0	32,0	32,4	34,5	36,5	38,5	40,6	42,6	44,7	46,7	48,7	50,8	52,8	54,8	56,9
1000 kg	31,0	31,5	33,6	35,7	37,8	39,9	42,0	44,1	46,2	48,3	50,4	52,5	54,6	56,7	58,8

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200 kg	30,7	31,8	31,3	32,3	33,4	34,4	35,5	36,5	37,6	38,7	39,7	40,8			
250 kg	32,7	32,3	33,4	34,5	35,6	36,7	37,9	39,0	40,1	41,2	42,4	43,5			
300 kg	33,1	34,3	35,5	36,7	37,9	39,1	40,2	41,4	42,6	43,8	45,0	46,2			
350 kg	35,1	36,4	37,6	38,9	40,1	41,4	42,6	43,9	45,1	46,4	47,6	48,9			
400 kg	37,1	38,4	39,7	41,0	42,4	43,7	45,0	46,3	47,6	48,9	50,3	51,6			
450 kg	39,1	40,5	41,8	43,2	44,6	46,0	47,4	48,8	50,1	51,5	52,9	54,3			
500 kg	41,1	42,5	43,9	45,4	46,8	48,3	49,7	51,2	52,6	54,1	55,5	57,0			
550 kg	43,0	44,5	46,1	47,6	49,1	50,6	52,1	53,6	55,1	56,7	58,2	59,7			
600 kg	45,0	46,6	48,2	49,8	51,3	52,9	54,5	56,1	57,7	59,2	60,8	62,4			
650 kg	47,0	48,6	50,3	51,9	53,6	55,2	56,9	58,5	60,2	61,8	63,4	65,1			
700 kg	49,0	50,7	52,4	54,1	55,8	57,5	59,2	61,0	62,7	64,4	66,1	67,8			
750 kg	51,0	52,7	54,5	56,3	58,1	59,8	61,6	63,4	65,2	66,9	68,7	70,5			
800 kg	53,0	54,8	56,6	58,5	60,3	62,2	64,0	65,8	67,7	69,5	71,4	73,2			
850 kg	54,9	56,8	58,7	60,7	62,6	64,5	66,4	68,3	70,2	72,1	74,0	75,9			
900 kg	56,9	58,9	60,9	62,8	64,8	66,8	68,7	70,7	72,7	74,7	76,6	78,6			
950 kg	58,9	60,9	63,0	65,0	67,1	69,1	71,1	73,2	75,2	77,2	79,3	81,3			
1000 kg	60,9	63,0	65,1	67,2	69,3	71,4	73,5	75,6	77,7	79,8	81,9	84,0			

Selection data

Selection data

$$\Delta p \text{ [Pa]} = \zeta^* v^{2*} 0,6$$

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	
200	$\zeta [-]$	3,42	2,92	2,64	2,46	2,34	2,25	2,18	2,12	2,07	2,04	2,01	1,98	1,96	1,94	1,92
250	$\zeta [-]$	1,91	1,58	1,39	1,27	1,19	1,13	1,08	1,05	1,02	0,99	0,97	0,96	0,94	0,93	0,92
300	$\zeta [-]$	1,31	1,05	0,91	0,82	0,75	0,71	0,67	0,65	0,62	0,61	0,59	0,58	0,57	0,56	0,55
350	$\zeta [-]$	1,01	0,79	0,66	0,59	0,54	0,5	0,47	0,45	0,43	0,42	0,41	0,4	0,39	0,38	0,37
400	$\zeta [-]$	0,82	0,63	0,52	0,46	0,41	0,38	0,36	0,34	0,32	0,31	0,3	0,29	0,29	0,28	0,27
450	$\zeta [-]$	0,7	0,53	0,43	0,37	0,33	0,31	0,28	0,27	0,26	0,24	0,24	0,23	0,22	0,22	0,21
500	$\zeta [-]$	0,62	0,46	0,37	0,32	0,28	0,25	0,24	0,22	0,21	0,2	0,19	0,18	0,18	0,17	0,17
550	$\zeta [-]$	0,56	0,41	0,32	0,27	0,24	0,22	0,2	0,19	0,18	0,17	0,16	0,15	0,15	0,14	0,14
600	$\zeta [-]$	0,51	0,37	0,29	0,24	0,21	0,19	0,17	0,16	0,15	0,14	0,14	0,13	0,13	0,12	0,12
650	$\zeta [-]$	0,47	0,34	0,26	0,22	0,19	0,17	0,15	0,14	0,13	0,13	0,12	0,11	0,11	0,11	0,1
700	$\zeta [-]$	0,44	0,31	0,24	0,2	0,17	0,15	0,14	0,13	0,12	0,11	0,11	0,1	0,1	0,09	0,09
750	$\zeta [-]$	0,42	0,29	0,23	0,18	0,16	0,14	0,13	0,12	0,11	0,1	0,1	0,09	0,09	0,08	0,08
800	$\zeta [-]$	0,4	0,28	0,21	0,17	0,15	0,13	0,12	0,11	0,1	0,09	0,09	0,08	0,08	0,08	0,07
850	$\zeta [-]$	0,38	0,26	0,2	0,16	0,14	0,12	0,11	0,1	0,09	0,08	0,08	0,08	0,07	0,07	0,07
900	$\zeta [-]$	0,37	0,25	0,19	0,15	0,13	0,11	0,1	0,09	0,08	0,08	0,07	0,07	0,07	0,06	0,06
950	$\zeta [-]$	0,36	0,24	0,18	0,14	0,12	0,11	0,09	0,08	0,08	0,07	0,07	0,06	0,06	0,06	0,06
1000	$\zeta [-]$	0,34	0,23	0,17	0,14	0,12	0,1	0,09	0,08	0,07	0,07	0,06	0,06	0,06	0,05	0,05

Hn\Wn [mm]	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	$\zeta [-]$	1,9	1,89	1,88	1,86	1,85	1,84	1,84	1,83	1,82	1,81	1,81	1,8		
250	$\zeta [-]$	0,91	0,9	0,89	0,88	0,88	0,87	0,87	0,86	0,86	0,85	0,85	0,85		
300	$\zeta [-]$	0,54	0,54	0,53	0,53	0,52	0,52	0,51	0,51	0,51	0,5	0,5	0,5		
350	$\zeta [-]$	0,37	0,36	0,36	0,35	0,35	0,35	0,34	0,34	0,34	0,33	0,33	0,33		
400	$\zeta [-]$	0,27	0,26	0,26	0,26	0,25	0,25	0,25	0,25	0,24	0,24	0,24	0,24		
450	$\zeta [-]$	0,21	0,2	0,2	0,2	0,19	0,19	0,19	0,19	0,19	0,18	0,18	0,18		
500	$\zeta [-]$	0,17	0,16	0,16	0,16	0,15	0,15	0,15	0,15	0,15	0,15	0,14	0,14		
550	$\zeta [-]$	0,14	0,13	0,13	0,13	0,13	0,13	0,12	0,12	0,12	0,12	0,12	0,12		
600	$\zeta [-]$	0,12	0,11	0,11	0,11	0,11	0,11	0,1	0,1	0,1	0,1	0,1	0,1		
650	$\zeta [-]$	0,1	0,1	0,1	0,09	0,09	0,09	0,09	0,09	0,09	0,08	0,08	0,08		
700	$\zeta [-]$	0,09	0,09	0,08	0,08	0,08	0,08	0,08	0,08	0,07	0,07	0,07	0,07		
750	$\zeta [-]$	0,08	0,08	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,06	0,06	0,06		
800	$\zeta [-]$	0,07	0,07	0,07	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06		
850	$\zeta [-]$	0,06	0,06	0,06	0,06	0,06	0,06	0,05	0,05	0,05	0,05	0,05	0,05		
900	$\zeta [-]$	0,06	0,06	0,06	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05		
950	$\zeta [-]$	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,04	0,04	0,04	0,04		
1000	$\zeta [-]$	0,05	0,05	0,05	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04		

Example

Data

Hn = 550 mm, Wn = 500 mm, v = 9 m/s

Calculation

$$\Delta p = 0,2 * (9 \text{ m/s})^2 * 0,6 = 9,72 \text{ Pa}$$

CU2 - CU2L - CU2-L500 - CU2 ATEX - CU2L ATEX - A-weighted sound power level Lwa in the room

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	
200	Sn [m ²]	0,0200	0,0250	0,0310	0,0370	0,0430	0,0490	0,0550	0,0610	0,0670	0,0730
	Sn [%]	49,00	51,00	52,00	53,00	54,00	55,00	55,00	56,00	56,00	56,00
	Q [m ³ /h]	657	832	1.007	1.182	1.356	1.531	1.706	1.880	2.055	2.230
	Δp [Pa]	42,70	37,50	34,50	32,50	31,10	30,10	29,30	28,70	28,20	27,70
	Q [m ³ /h]	559	707	856	1.004	1.153	1.301	1.450	1.598	1.747	1.895
	Δp [Pa]	30,90	27,10	24,90	23,50	22,50	21,70	21,20	20,70	20,30	20,00
	Q [m ³ /h]	475	601	728	854	980	1.106	1.232	1.359	1.485	1.611
	Δp [Pa]	22,30	19,60	18,00	17,00	16,20	15,70	15,30	15,00	14,70	14,50
	Q [m ³ /h]	404	511	618	726	833	940	1.048	1.155	1.262	1.369
	Δp [Pa]	16,10	14,10	13,00	12,30	11,70	11,30	11,10	10,80	10,60	10,50
250	Q [m ³ /h]	343	434	526	617	708	799	890	982	1.073	1.164
	Δp [Pa]	11,60	10,20	9,40	8,90	8,50	8,20	8,00	7,80	7,70	7,60
	Sn [m ²]	0,0280	0,0360	0,0450	0,0530	0,0620	0,0700	0,0780	0,0870	0,0950	0,1040
	Sn [%]	55,00	58,00	59,00	61,00	62,00	62,00	63,00	63,00	64,00	64,00
	Q [m ³ /h]	862	1.095	1.329	1.562	1.796	2.029	2.263	2.497	2.731	2.964
	Δp [Pa]	26,30	22,40	20,20	18,80	17,80	17,00	16,40	16,00	15,60	15,30
	Q [m ³ /h]	733	931	1.129	1.328	1.526	1.725	1.924	2.122	2.321	2.520
	Δp [Pa]	19,00	16,20	14,60	13,60	12,80	12,30	11,90	11,60	11,30	11,10
	Q [m ³ /h]	623	791	960	1.129	1.298	1.466	1.635	1.804	1.973	2.142
	Δp [Pa]	13,70	11,70	10,50	9,80	9,30	8,90	8,60	8,30	8,20	8,00
300	Q [m ³ /h]	530	673	816	959	1.103	1.246	1.390	1.533	1.677	1.820
	Δp [Pa]	9,90	8,50	7,60	7,10	6,70	6,40	6,20	6,00	5,90	5,80
	Q [m ³ /h]	450	572	694	816	937	1.059	1.181	1.303	1.425	1.547
	Δp [Pa]	7,20	6,10	5,50	5,10	4,80	4,60	4,50	4,40	4,30	4,20
	Sn [m ²]	0,0360	0,0470	0,0580	0,0690	0,0800	0,0910	0,1020	0,1130	0,1240	0,1340
	Sn [%]	60,00	62,00	64,00	65,00	66,00	67,00	68,00	68,00	69,00	69,00
	Q [m ³ /h]	1.068	1.361	1.655	1.949	2.243	2.538	2.832	3.127	3.422	3.717
	Δp [Pa]	19,30	16,00	14,20	13,00	12,20	11,60	11,10	10,70	10,40	10,20
	Q [m ³ /h]	908	1.157	1.407	1.657	1.907	2.157	2.408	2.658	2.909	3.159
	Δp [Pa]	13,90	11,60	10,30	9,40	8,80	8,40	8,00	7,80	7,50	7,40
350	Q [m ³ /h]	772	984	1.196	1.408	1.621	1.834	2.046	2.259	2.472	2.685
	Δp [Pa]	10,10	8,40	7,40	6,80	6,40	6,00	5,80	5,60	5,50	5,30
	Q [m ³ /h]	656	836	1.016	1.197	1.378	1.559	1.740	1.921	2.102	2.283
	Δp [Pa]	7,30	6,10	5,40	4,90	4,60	4,40	4,20	4,10	3,90	3,80
	Q [m ³ /h]	558	711	864	1.017	1.171	1.325	1.479	1.632	1.786	1.940
400	Δp [Pa]	5,20	4,40	3,90	3,50	3,30	3,20	3,00	2,90	2,80	2,80

Selection data

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	
350	Sn [m ²]	0,0440	0,0580	0,0710	0,0840	0,0980	0,1110	0,1250	0,1380	0,1520	0,1650
	Sn [%]	63,00	66,00	68,00	69,00	70,00	71,00	71,00	72,00	72,00	73,00
	Q [m ³ /h]	1.276	1.630	1.985	2.341	2.698	3.055	3.412	3.769	4.127	4.485
	Δp [Pa]	15,50	12,60	11,00	10,00	9,20	8,70	8,30	8,00	7,70	7,50
	Q [m ³ /h]	1.084	1.385	1.687	1.990	2.293	2.596	2.900	3.204	3.508	3.812
	Δp [Pa]	11,20	9,10	7,90	7,20	6,70	6,30	6,00	5,80	5,60	5,40
	Q [m ³ /h]	922	1.177	1.434	1.691	1.949	2.207	2.465	2.723	2.982	3.240
	Δp [Pa]	8,10	6,60	5,70	5,20	4,80	4,50	4,30	4,20	4,00	3,90
	Q [m ³ /h]	783	1.001	1.219	1.438	1.657	1.876	2.095	2.315	2.535	2.754
	Δp [Pa]	5,80	4,80	4,10	3,80	3,50	3,30	3,10	3,00	2,90	2,80
400	Q [m ³ /h]	666	851	1.036	1.222	1.408	1.595	1.781	1.968	2.154	2.341
	Δp [Pa]	4,20	3,40	3,00	2,70	2,50	2,40	2,30	2,20	2,10	2,00
450	Sn [m ²]	0,0520	0,0680	0,0840	0,1000	0,1160	0,1320	0,1480	0,1640	0,1800	0,1960
	Sn [%]	65,00	68,00	70,00	72,00	73,00	73,00	74,00	75,00	75,00	75,00
	Q [m ³ /h]	1.484	1.900	2.318	2.737	3.157	3.578	4.000	4.421	4.843	5.266
	Δp [Pa]	13,10	10,50	9,00	8,10	7,50	7,00	6,60	6,30	6,10	5,90
	Q [m ³ /h]	1.261	1.615	1.970	2.327	2.684	3.041	3.400	3.758	4.117	4.476
	Δp [Pa]	9,50	7,60	6,50	5,90	5,40	5,00	4,80	4,60	4,40	4,30
	Q [m ³ /h]	1.072	1.373	1.675	1.978	2.281	2.585	2.890	3.194	3.499	3.804
	Δp [Pa]	6,80	5,50	4,70	4,20	3,90	3,60	3,50	3,30	3,20	3,10
	Q [m ³ /h]	911	1.167	1.423	1.681	1.939	2.197	2.456	2.715	2.974	3.234
	Δp [Pa]	4,90	4,00	3,40	3,10	2,80	2,60	2,50	2,40	2,30	2,20
450	Q [m ³ /h]	775	992	1.210	1.429	1.648	1.868	2.088	2.308	2.528	2.749
	Δp [Pa]	3,60	2,90	2,50	2,20	2,00	1,90	1,80	1,70	1,70	1,60
450	Sn [m ²]	0,0610	0,0790	0,0970	0,1160	0,1340	0,1530	0,1710	0,1900	0,2080	0,2270
	Sn [%]	67,00	70,00	72,00	74,00	75,00	75,00	76,00	77,00	77,00	77,00
	Q [m ³ /h]	1.693	2.171	2.653	3.137	3.622	4.108	4.594	5.082	5.569	6.057
	Δp [Pa]	11,50	9,10	7,70	6,90	6,30	5,80	5,50	5,20	5,00	4,90
	Q [m ³ /h]	1.439	1.846	2.255	2.666	3.078	3.491	3.905	4.319	4.734	5.149
	Δp [Pa]	8,30	6,60	5,60	5,00	4,50	4,20	4,00	3,80	3,60	3,50
	Q [m ³ /h]	1.223	1.569	1.917	2.266	2.617	2.968	3.319	3.671	4.024	4.377
	Δp [Pa]	6,00	4,70	4,00	3,60	3,30	3,00	2,90	2,70	2,60	2,50
	Q [m ³ /h]	1.040	1.334	1.629	1.926	2.224	2.523	2.822	3.121	3.420	3.720
	Δp [Pa]	4,30	3,40	2,90	2,60	2,40	2,20	2,10	2,00	1,90	1,80
450	Q [m ³ /h]	884	1.134	1.385	1.637	1.891	2.144	2.398	2.653	2.907	3.162
	Δp [Pa]	3,10	2,50	2,10	1,90	1,70	1,60	1,50	1,40	1,40	1,30

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	
500	Sn [m ²]	0,0690	0,0900	0,1110	0,1320	0,1530	0,1730	0,1940	0,2150	0,2360	0,2570
	Sn [%]	69,00	72,00	74,00	75,00	76,00	77,00	78,00	78,00	79,00	79,00
	Q [m ³ /h]	1.902	2.444	2.990	3.539	4.090	4.642	5.195	5.749	6.304	6.859
	Δp [Pa]	10,40	8,10	6,80	6,00	5,40	5,00	4,70	4,50	4,30	4,10
	Q [m ³ /h]	1.617	2.078	2.542	3.008	3.476	3.945	4.416	4.887	5.358	5.830
	Δp [Pa]	7,50	5,80	4,90	4,30	3,90	3,60	3,40	3,20	3,10	3,00
	Q [m ³ /h]	1.374	1.766	2.160	2.557	2.955	3.354	3.753	4.154	4.554	4.956
	Δp [Pa]	5,40	4,20	3,60	3,10	2,80	2,60	2,50	2,30	2,20	2,10
	Q [m ³ /h]	1.168	1.501	1.836	2.173	2.512	2.851	3.190	3.531	3.871	4.212
	Δp [Pa]	3,90	3,10	2,60	2,30	2,00	1,90	1,80	1,70	1,60	1,60
550	Q [m ³ /h]	993	1.276	1.561	1.847	2.135	2.423	2.712	3.001	3.291	3.580
	Δp [Pa]	2,80	2,20	1,90	1,60	1,50	1,40	1,30	1,20	1,20	1,10
	Sn [m ²]	0,0770	0,1000	0,1240	0,1470	0,1710	0,1940	0,2180	0,2410	0,2650	0,2880
	Sn [%]	70,00	73,00	75,00	77,00	78,00	78,00	79,00	80,00	80,00	81,00
	Q [m ³ /h]	2.112	2.718	3.329	3.944	4.561	5.180	5.800	6.422	7.045	7.668
	Δp [Pa]	9,50	7,30	6,10	5,30	4,80	4,40	4,10	3,90	3,70	3,60
	Q [m ³ /h]	1.795	2.310	2.830	3.352	3.877	4.403	4.930	5.459	5.988	6.518
	Δp [Pa]	6,90	5,30	4,40	3,90	3,50	3,20	3,00	2,80	2,70	2,60
	Q [m ³ /h]	1.526	1.964	2.405	2.849	3.295	3.743	4.191	4.640	5.090	5.540
	Δp [Pa]	5,00	3,80	3,20	2,80	2,50	2,30	2,20	2,00	1,90	1,90
600	Q [m ³ /h]	1.297	1.669	2.044	2.422	2.801	3.181	3.562	3.944	4.326	4.709
	Δp [Pa]	3,60	2,80	2,30	2,00	1,80	1,70	1,60	1,50	1,40	1,30
	Q [m ³ /h]	1.103	1.419	1.738	2.059	2.381	2.704	3.028	3.353	3.678	4.003
	Δp [Pa]	2,60	2,00	1,70	1,50	1,30	1,20	1,10	1,10	1,00	1,00
	Sn [m ²]	0,0850	0,1110	0,1370	0,1630	0,1890	0,2150	0,2410	0,2670	0,2930	0,3190
	Sn [%]	71,00	74,00	76,00	78,00	79,00	80,00	80,00	81,00	81,00	82,00
	Q [m ³ /h]	2.323	2.993	3.669	4.350	5.035	5.722	6.410	7.101	7.792	8.485
	Δp [Pa]	8,90	6,80	5,60	4,80	4,30	4,00	3,70	3,50	3,30	3,20
	Q [m ³ /h]	1.974	2.544	3.119	3.698	4.279	4.863	5.449	6.036	6.623	7.212
	Δp [Pa]	6,40	4,90	4,00	3,50	3,10	2,90	2,70	2,50	2,40	2,30
650	Q [m ³ /h]	1.678	2.162	2.651	3.143	3.638	4.134	4.632	5.130	5.630	6.130
	Δp [Pa]	4,60	3,50	2,90	2,50	2,30	2,10	1,90	1,80	1,70	1,60
	Q [m ³ /h]	1.426	1.838	2.253	2.672	3.092	3.514	3.937	4.361	4.785	5.211
	Δp [Pa]	3,30	2,50	2,10	1,80	1,60	1,50	1,40	1,30	1,20	1,20
	Q [m ³ /h]	1.212	1.562	1.915	2.271	2.628	2.987	3.346	3.707	4.068	4.429
	Δp [Pa]	2,40	1,80	1,50	1,30	1,20	1,10	1,00	0,90	0,90	0,90

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	
650	Sn [m ²]	0,0930	0,1220	0,1500	0,1790	0,2070	0,2360	0,2640	0,2920	0,3210	0,3490
	Sn [%]	72,00	75,00	77,00	79,00	80,00	81,00	81,00	82,00	82,00	83,00
	Q [m ³ /h]	2.533	3.268	4.010	4.759	5.511	6.266	7.024	7.784	8.545	9.307
	Δp [Pa]	8,30	6,30	5,20	4,40	4,00	3,60	3,30	3,10	3,00	2,80
	Q [m ³ /h]	2.153	2.778	3.409	4.045	4.684	5.326	5.970	6.616	7.263	7.911
	Δp [Pa]	6,00	4,50	3,70	3,20	2,90	2,60	2,40	2,30	2,10	2,00
	Q [m ³ /h]	1.830	2.361	2.898	3.438	3.982	4.527	5.075	5.624	6.174	6.725
	Δp [Pa]	4,40	3,30	2,70	2,30	2,10	1,90	1,70	1,60	1,60	1,50
	Q [m ³ /h]	1.556	2.007	2.463	2.922	3.384	3.848	4.314	4.780	5.248	5.716
	Δp [Pa]	3,10	2,40	1,90	1,70	1,50	1,40	1,30	1,20	1,10	1,10
700	Q [m ³ /h]	1.322	1.706	2.094	2.484	2.877	3.271	3.667	4.063	4.461	4.859
	Δp [Pa]	2,30	1,70	1,40	1,20	1,10	1,00	0,90	0,90	0,80	0,80
	Sn [m ²]	0,1020	0,1320	0,1630	0,1940	0,2250	0,2560	0,2870	0,3180	0,3490	0,3800
	Sn [%]	73,00	76,00	78,00	79,00	80,00	81,00	82,00	83,00	83,00	84,00
	Q [m ³ /h]	2.744	3.544	4.353	5.168	5.989	6.813	7.641	8.471	9.302	10.136
	Δp [Pa]	7,90	5,90	4,80	4,10	3,70	3,30	3,10	2,90	2,70	2,60
	Q [m ³ /h]	2.333	3.012	3.700	4.393	5.091	5.791	6.495	7.200	7.907	8.615
	Δp [Pa]	5,70	4,30	3,50	3,00	2,60	2,40	2,20	2,10	2,00	1,90
	Q [m ³ /h]	1.983	2.560	3.145	3.734	4.327	4.923	5.521	6.120	6.721	7.323
	Δp [Pa]	4,10	3,10	2,50	2,20	1,90	1,70	1,60	1,50	1,40	1,30
750	Q [m ³ /h]	1.685	2.176	2.673	3.174	3.678	4.184	4.693	5.202	5.713	6.225
	Δp [Pa]	3,00	2,20	1,80	1,60	1,40	1,30	1,20	1,10	1,00	1,00
	Q [m ³ /h]	1.433	1.850	2.272	2.698	3.126	3.557	3.989	4.422	4.856	5.291
	Δp [Pa]	2,20	1,60	1,30	1,10	1,00	0,90	0,80	0,80	0,70	0,70
	Sn [m ²]	0,1100	0,1430	0,1770	0,2100	0,2440	0,2770	0,3100	0,3440	0,3770	0,4110
	Sn [%]	73,00	76,00	78,00	80,00	81,00	82,00	83,00	83,00	84,00	84,00
	Q [m ³ /h]	2.955	3.820	4.696	5.579	6.469	7.363	8.261	9.161	10.064	10.969
	Δp [Pa]	7,60	5,60	4,50	3,90	3,40	3,10	2,80	2,60	2,50	2,40
	Q [m ³ /h]	2.512	3.247	3.991	4.742	5.499	6.259	7.022	7.787	8.554	9.323
	Δp [Pa]	5,50	4,10	3,30	2,80	2,50	2,20	2,00	1,90	1,80	1,70
800	Q [m ³ /h]	2.135	2.760	3.393	4.031	4.674	5.320	5.968	6.619	7.271	7.925
	Δp [Pa]	3,90	2,90	2,40	2,00	1,80	1,60	1,50	1,40	1,30	1,20
	Q [m ³ /h]	1.815	2.346	2.884	3.426	3.973	4.522	5.073	5.626	6.181	6.736
	Δp [Pa]	2,90	2,10	1,70	1,50	1,30	1,20	1,10	1,00	0,90	0,90
	Q [m ³ /h]	1.543	1.994	2.451	2.912	3.377	3.844	4.312	4.782	5.254	5.726
	Δp [Pa]	2,10	1,50	1,20	1,10	0,90	0,80	0,80	0,70	0,70	0,60
	Q [m ³ /h]	1.322	1.706	2.094	2.484	2.877	3.271	3.667	4.063	4.461	4.859
	Δp [Pa]	1,70	1,20	1,00	0,90	0,80	0,70	0,70	0,70	0,70	0,60
	Q [m ³ /h]	1.090	1.474	1.858	2.242	2.635	3.028	3.421	3.814	4.207	4.599
	Δp [Pa]	1,10	0,70	0,50	0,40	0,30	0,20	0,10	0,00	0,00	0,00

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	
800	Sn [m ²]	0,1180	0,1540	0,1900	0,2260	0,2620	0,2980	0,3340	0,3700	0,4060	0,4410
	Sn [%]	74,00	77,00	79,00	81,00	82,00	83,00	83,00	84,00	84,00	85,00
	Q [m ³ /h]	3.167	4.097	5.039	5.991	6.950	7.914	8.883	9.855	10.829	11.806
	Δp [Pa]	7,30	5,30	4,30	3,60	3,20	2,90	2,60	2,50	2,30	2,20
	Q [m ³ /h]	2.692	3.482	4.283	5.093	5.908	6.727	7.550	8.377	9.205	10.035
	Δp [Pa]	5,20	3,90	3,10	2,60	2,30	2,10	1,90	1,80	1,70	1,60
	Q [m ³ /h]	2.288	2.960	3.641	4.329	5.022	5.718	6.418	7.120	7.824	8.530
	Δp [Pa]	3,80	2,80	2,20	1,90	1,70	1,50	1,40	1,30	1,20	1,10
	Q [m ³ /h]	1.945	2.516	3.095	3.679	4.268	4.861	5.455	6.052	6.651	7.250
	Δp [Pa]	2,70	2,00	1,60	1,40	1,20	1,10	1,00	0,90	0,90	0,80
850	Q [m ³ /h]	1.653	2.139	2.631	3.128	3.628	4.132	4.637	5.144	5.653	6.163
	Δp [Pa]	2,00	1,50	1,20	1,00	0,90	0,80	0,70	0,70	0,60	0,60
850	Sn [m ²]	0,1260	0,1650	0,2030	0,2410	0,2800	0,3180	0,3570	0,3950	0,4340	0,4720
	Sn [%]	74,00	77,00	80,00	81,00	82,00	83,00	84,00	85,00	85,00	85,00
	Q [m ³ /h]	3.378	4.374	5.384	6.404	7.433	8.468	9.507	10.551	11.598	12.647
	Δp [Pa]	7,00	5,10	4,10	3,50	3,00	2,70	2,50	2,30	2,20	2,00
	Q [m ³ /h]	2.872	3.718	4.576	5.444	6.318	7.198	8.081	8.968	9.858	10.750
	Δp [Pa]	5,10	3,70	3,00	2,50	2,20	2,00	1,80	1,70	1,60	1,50
	Q [m ³ /h]	2.441	3.160	3.890	4.627	5.370	6.118	6.869	7.623	8.380	9.138
	Δp [Pa]	3,70	2,70	2,10	1,80	1,60	1,40	1,30	1,20	1,10	1,10
	Q [m ³ /h]	2.075	2.686	3.306	3.933	4.565	5.200	5.839	6.480	7.123	7.767
	Δp [Pa]	2,60	1,90	1,50	1,30	1,10	1,00	0,90	0,90	0,80	0,80
900	Q [m ³ /h]	1.764	2.283	2.810	3.343	3.880	4.420	4.963	5.508	6.054	6.602
	Δp [Pa]	1,90	1,40	1,10	0,90	0,80	0,70	0,70	0,60	0,60	0,60
900	Sn [m ²]	0,1340	0,1750	0,2160	0,2570	0,2980	0,3390	0,3800	0,4210	0,4620	0,5030
	Sn [%]	75,00	78,00	80,00	82,00	83,00	84,00	84,00	85,00	86,00	86,00
	Q [m ³ /h]	3.590	4.651	5.729	6.818	7.917	9.023	10.134	11.250	12.369	13.492
	Δp [Pa]	6,80	4,90	3,90	3,30	2,90	2,60	2,30	2,20	2,00	1,90
	Q [m ³ /h]	3.052	3.953	4.869	5.795	6.729	7.669	8.614	9.562	10.514	11.468
	Δp [Pa]	4,90	3,60	2,80	2,40	2,10	1,90	1,70	1,60	1,50	1,40
	Q [m ³ /h]	2.594	3.360	4.139	4.926	5.720	6.519	7.322	8.128	8.937	9.748
	Δp [Pa]	3,50	2,60	2,10	1,70	1,50	1,30	1,20	1,10	1,10	1,00
	Q [m ³ /h]	2.205	2.856	3.518	4.187	4.862	5.541	6.224	6.909	7.596	8.286
	Δp [Pa]	2,60	1,90	1,50	1,20	1,10	1,00	0,90	0,80	0,80	0,70
900	Q [m ³ /h]	1.874	2.428	2.990	3.559	4.133	4.710	5.290	5.873	6.457	7.043
	Δp [Pa]	1,80	1,30	1,10	0,90	0,80	0,70	0,60	0,60	0,60	0,50

Selection data

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	
950	Sn [m ²]	0,1430	0,1860	0,2290	0,2730	0,3160	0,3600	0,4030	0,4470	0,4900	0,5340
	Sn [%]	75,00	78,00	80,00	82,00	83,00	84,00	85,00	85,00	86,00	86,00
	Q [m ³ /h]	3.802	4.929	6.074	7.233	8.402	9.579	10.762	11.951	13.144	14.340
	Δp [Pa]	6,60	4,80	3,80	3,20	2,70	2,50	2,20	2,10	1,90	1,80
	Q [m ³ /h]	3.232	4.189	5.163	6.148	7.142	8.142	9.148	10.158	11.172	12.189
	Δp [Pa]	4,80	3,40	2,70	2,30	2,00	1,80	1,60	1,50	1,40	1,30
	Q [m ³ /h]	2.747	3.561	4.388	5.226	6.070	6.921	7.776	8.635	9.496	10.361
	Δp [Pa]	3,40	2,50	2,00	1,70	1,40	1,30	1,20	1,10	1,00	0,90
	Q [m ³ /h]	2.335	3.027	3.730	4.442	5.160	5.883	6.609	7.339	8.072	8.807
	Δp [Pa]	2,50	1,80	1,40	1,20	1,00	0,90	0,80	0,80	0,70	0,70
1000	Q [m ³ /h]	1.985	2.573	3.171	3.776	4.386	5.000	5.618	6.239	6.861	7.486
	Δp [Pa]	1,80	1,30	1,00	0,90	0,70	0,70	0,60	0,60	0,50	0,50
1000	Sn [m ²]	0,1510	0,1970	0,2430	0,2890	0,3350	0,3800	0,4260	0,4720	0,5180	0,5640
	Sn [%]	75,00	79,00	81,00	82,00	84,00	85,00	85,00	86,00	86,00	87,00
	Q [m ³ /h]	4.014	5.207	6.420	7.648	8.888	10.136	11.392	12.654	13.920	15.191
	Δp [Pa]	6,40	4,60	3,60	3,00	2,60	2,30	2,10	2,00	1,80	1,70
	Q [m ³ /h]	3.412	4.426	5.457	6.501	7.554	8.616	9.683	10.756	11.832	12.912
	Δp [Pa]	4,60	3,30	2,60	2,20	1,90	1,70	1,50	1,40	1,30	1,20
	Q [m ³ /h]	2.900	3.762	4.638	5.526	6.421	7.324	8.231	9.143	10.058	10.976
	Δp [Pa]	3,30	2,40	1,90	1,60	1,40	1,20	1,10	1,00	0,90	0,90
	Q [m ³ /h]	2.465	3.198	3.943	4.697	5.458	6.225	6.996	7.771	8.549	9.329
	Δp [Pa]	2,40	1,70	1,40	1,10	1,00	0,90	0,80	0,70	0,70	0,60
200	Q [m ³ /h]	2.095	2.718	3.351	3.992	4.639	5.291	5.947	6.606	7.267	7.930
	Δp [Pa]	1,70	1,30	1,00	0,80	0,70	0,60	0,60	0,50	0,50	0,50
Hn\Wn [mm]	700	750	800	850	900	950	1000	1050	1100	1150	
200	Sn [m ²]	0,0790	0,0850	0,0910	0,0970	0,1030	0,1090	0,1150	0,1210	0,1270	0,1330
	Sn [%]	56,00	57,00	57,00	57,00	57,00	57,00	57,00	57,00	58,00	58,00
	Q [m ³ /h]	2.404	2.579	2.754	2.928	3.103	3.278	3.452	3.627	3.802	3.976
	Δp [Pa]	27,40	27,10	26,80	26,60	26,40	26,20	26,00	25,90	25,80	25,60
	Q [m ³ /h]	2.044	2.192	2.341	2.489	2.638	2.786	2.934	3.083	3.231	3.380
	Δp [Pa]	19,80	19,60	19,40	19,20	19,10	18,90	18,80	18,70	18,60	18,50
	Q [m ³ /h]	1.737	1.863	1.990	2.116	2.242	2.368	2.494	2.620	2.747	2.873
	Δp [Pa]	14,30	14,10	14,00	13,90	13,80	13,70	13,60	13,50	13,50	13,40
	Q [m ³ /h]	1.477	1.584	1.691	1.798	1.906	2.013	2.120	2.227	2.335	2.442
	Δp [Pa]	10,30	10,20	10,10	10,00	9,90	9,90	9,80	9,80	9,70	9,70
250	Q [m ³ /h]	1.255	1.346	1.437	1.529	1.620	1.711	1.802	1.893	1.984	2.076
	Δp [Pa]	7,50	7,40	7,30	7,20	7,20	7,10	7,10	7,10	7,00	7,00

Hn\Wn [mm]	700	750	800	850	900	950	1000	1050	1100	1150	
250	Sn [m ²]	0,1120	0,1210	0,1290	0,1380	0,1460	0,1540	0,1630	0,1710	0,1800	0,1880
	Sn [%]	64,00	64,00	65,00	65,00	65,00	65,00	65,00	65,00	65,00	65,00
	Q [m ³ /h]	3.198	3.432	3.666	3.899	4.133	4.367	4.601	4.835	5.068	5.302
	Δp [Pa]	15,10	14,80	14,70	14,50	14,30	14,20	14,10	14,00	13,90	13,80
	Q [m ³ /h]	2.718	2.917	3.116	3.314	3.513	3.712	3.911	4.109	4.308	4.507
	Δp [Pa]	10,90	10,70	10,60	10,50	10,40	10,30	10,20	10,10	10,10	10,00
	Q [m ³ /h]	2.311	2.479	2.648	2.817	2.986	3.155	3.324	3.493	3.662	3.831
	Δp [Pa]	7,90	7,70	7,70	7,60	7,50	7,40	7,40	7,30	7,30	7,20
	Q [m ³ /h]	1.964	2.108	2.251	2.395	2.538	2.682	2.825	2.969	3.113	3.256
	Δp [Pa]	5,70	5,60	5,50	5,50	5,40	5,40	5,30	5,30	5,20	5,20
300	Q [m ³ /h]	1.669	1.791	1.913	2.036	2.158	2.280	2.402	2.524	2.646	2.768
	Δp [Pa]	4,10	4,00	4,00	3,90	3,90	3,90	3,80	3,80	3,80	3,80
	Sn [m ²]	0,1450	0,1560	0,1670	0,1780	0,1890	0,2000	0,2110	0,2220	0,2330	0,2440
	Sn [%]	69,00	69,00	70,00	70,00	70,00	70,00	70,00	70,00	71,00	71,00
	Q [m ³ /h]	4.012	4.307	4.602	4.897	5.192	5.487	5.782	6.077	6.372	6.667
	Δp [Pa]	10,00	9,80	9,70	9,50	9,40	9,30	9,20	9,10	9,10	9,00
	Q [m ³ /h]	3.410	3.661	3.911	4.162	4.413	4.664	4.915	5.165	5.416	5.667
	Δp [Pa]	7,20	7,10	7,00	6,90	6,80	6,70	6,70	6,60	6,50	6,50
	Q [m ³ /h]	2.899	3.112	3.325	3.538	3.751	3.964	4.177	4.391	4.604	4.817
	Δp [Pa]	5,20	5,10	5,00	5,00	4,90	4,90	4,80	4,80	4,70	4,70
350	Q [m ³ /h]	2.464	2.645	2.826	3.007	3.188	3.370	3.551	3.732	3.913	4.095
	Δp [Pa]	3,80	3,70	3,60	3,60	3,60	3,50	3,50	3,40	3,40	3,40
	Q [m ³ /h]	2.094	2.248	2.402	2.556	2.710	2.864	3.018	3.172	3.326	3.480
	Δp [Pa]	2,70	2,70	2,60	2,60	2,60	2,50	2,50	2,50	2,50	2,50
	Sn [m ²]	0,1790	0,1920	0,2060	0,2190	0,2320	0,2460	0,2590	0,2730	0,2860	0,3000
	Sn [%]	73,00	73,00	73,00	74,00	74,00	74,00	74,00	74,00	74,00	74,00
	Q [m ³ /h]	4.843	5.201	5.559	5.917	6.275	6.633	6.991	7.350	7.708	8.066
	Δp [Pa]	7,30	7,20	7,10	6,90	6,80	6,80	6,70	6,60	6,50	6,50
	Q [m ³ /h]	4.116	4.421	4.725	5.029	5.334	5.638	5.943	6.247	6.552	6.857
	Δp [Pa]	5,30	5,20	5,10	5,00	4,90	4,90	4,80	4,80	4,70	4,70
400	Q [m ³ /h]	3.499	3.758	4.016	4.275	4.534	4.793	5.051	5.310	5.569	5.828
	Δp [Pa]	3,80	3,80	3,70	3,60	3,60	3,50	3,50	3,50	3,40	3,40
	Q [m ³ /h]	2.974	3.194	3.414	3.634	3.854	4.074	4.294	4.514	4.734	4.954
	Δp [Pa]	2,80	2,70	2,70	2,60	2,60	2,60	2,50	2,50	2,50	2,40
	Q [m ³ /h]	2.528	2.715	2.902	3.089	3.276	3.463	3.650	3.837	4.024	4.211
	Δp [Pa]	2,00	2,00	1,90	1,90	1,90	1,80	1,80	1,80	1,80	1,80
	Sn [m ²]	0,1450	0,1560	0,1670	0,1780	0,1890	0,2000	0,2110	0,2220	0,2330	0,2440
	Sn [%]	69,00	69,00	70,00	70,00	70,00	70,00	70,00	70,00	71,00	71,00
	Q [m ³ /h]	4.012	4.307	4.602	4.897	5.192	5.487	5.782	6.077	6.372	6.667
	Δp [Pa]	10,00	9,80	9,70	9,50	9,40	9,30	9,20	9,10	9,10	9,00
450	Q [m ³ /h]	3.410	3.661	3.911	4.162	4.413	4.664	4.915	5.165	5.416	5.667
	Δp [Pa]	7,20	7,10	7,00	6,90	6,80	6,70	6,70	6,60	6,50	6,50
	Q [m ³ /h]	2.899	3.112	3.325	3.538	3.751	3.964	4.177	4.391	4.604	4.817
	Δp [Pa]	5,20	5,10	5,00	5,00	4,90	4,90	4,80	4,80	4,70	4,70
	Q [m ³ /h]	2.464	2.645	2.826	3.007	3.188	3.370	3.551	3.732	3.913	4.095
	Δp [Pa]	3,80	3,70	3,60	3,60	3,60	3,50	3,50	3,40	3,40	3,40
	Q [m ³ /h]	2.094	2.248	2.402	2.556	2.710	2.864	3.018	3.172	3.326	3.480
	Δp [Pa]	2,70	2,70	2,60	2,60	2,60	2,50	2,50	2,50	2,50	2,50
	Sn [m ²]	0,1790	0,1920	0,2060	0,2190	0,2320	0,2460	0,2590	0,2730	0,2860	0,3000
	Sn [%]	73,00	73,00	73,00	74,00	74,00	74,00	74,00	74,00	74,00	74,00
500	Q [m ³ /h]	4.843	5.201	5.559	5.917	6.275	6.633	6.991	7.350	7.708	8.066
	Δp [Pa]	7,30	7,20	7,10	6,90	6,80	6,80	6,70	6,60	6,50	6,50
	Q [m ³ /h]	4.116	4.421	4.725	5.029	5.334	5.638	5.943	6.247	6.552	6.857
	Δp [Pa]	5,30	5,20	5,10	5,00	4,90	4,90	4,80	4,80	4,70	4,70
	Q [m ³ /h]	3.499	3.758	4.016	4.275	4.534	4.793	5.051	5.310	5.569	5.828
	Δp [Pa]	3,80	3,80	3,70	3,60	3,60	3,50	3,50	3,50	3,40	3,40
	Q [m ³ /h]	2.974	3.194	3.414	3.634	3.854	4.074	4.294	4.514	4.734	4.954
	Δp [Pa]	2,80	2,70	2,70	2,60	2,60	2,60	2,50	2,50	2,50	2,40
	Q [m ³ /h]	2.528	2.715	2.902	3.089	3.276	3.463	3.650	3.837	4.024	4.211
	Δp [Pa]	2,00	2,00	1,90	1,90	1,90	1,80	1,80	1,80	1,80	1,80

Hn\Wn [mm]	700	750	800	850	900	950	1000	1050	1100	1150	
400	Sn [m ²]	0,2120	0,2280	0,2440	0,2600	0,2760	0,2920	0,3080	0,3230	0,3390	0,3550
	Sn [%]	76,00	76,00	76,00	76,00	77,00	77,00	77,00	77,00	77,00	77,00
	Q [m ³ /h]	5.688	6.111	6.533	6.956	7.379	7.802	8.226	8.649	9.072	9.495
	Δp [Pa]	5,80	5,60	5,50	5,40	5,30	5,20	5,20	5,10	5,00	5,00
	Q [m ³ /h]	4.835	5.194	5.554	5.913	6.272	6.632	6.992	7.351	7.711	8.071
	Δp [Pa]	4,20	4,10	4,00	3,90	3,80	3,80	3,70	3,70	3,60	3,60
	Q [m ³ /h]	4.110	4.415	4.721	5.026	5.332	5.637	5.943	6.249	6.555	6.860
	Δp [Pa]	3,00	2,90	2,90	2,80	2,80	2,70	2,70	2,70	2,60	2,60
	Q [m ³ /h]	3.493	3.753	4.012	4.272	4.532	4.792	5.052	5.311	5.571	5.831
	Δp [Pa]	2,20	2,10	2,10	2,00	2,00	2,00	1,90	1,90	1,90	1,90
450	Q [m ³ /h]	2.969	3.190	3.411	3.631	3.852	4.073	4.294	4.515	4.736	4.957
	Δp [Pa]	1,60	1,50	1,50	1,50	1,40	1,40	1,40	1,40	1,40	1,40
	Sn [m ²]	0,2450	0,2630	0,2820	0,3000	0,3190	0,3370	0,3560	0,3740	0,3930	0,4110
	Sn [%]	78,00	78,00	78,00	79,00	79,00	79,00	79,00	79,00	79,00	79,00
	Q [m ³ /h]	6.546	7.035	7.524	8.013	8.502	8.991	9.481	9.970	10.460	10.950
	Δp [Pa]	4,70	4,60	4,50	4,40	4,30	4,20	4,20	4,10	4,10	4,00
	Q [m ³ /h]	5.564	5.979	6.395	6.811	7.227	7.643	8.059	8.475	8.891	9.307
	Δp [Pa]	3,40	3,30	3,20	3,20	3,10	3,10	3,00	3,00	2,90	2,90
	Q [m ³ /h]	4.730	5.083	5.436	5.789	6.143	6.496	6.850	7.204	7.557	7.911
	Δp [Pa]	2,50	2,40	2,30	2,30	2,30	2,20	2,20	2,20	2,10	2,10
500	Q [m ³ /h]	4.020	4.320	4.620	4.921	5.221	5.522	5.822	6.123	6.424	6.725
	Δp [Pa]	1,80	1,70	1,70	1,70	1,60	1,60	1,60	1,60	1,50	1,50
	Q [m ³ /h]	3.417	3.672	3.927	4.183	4.438	4.694	4.949	5.205	5.460	5.716
	Δp [Pa]	1,30	1,30	1,20	1,20	1,20	1,20	1,10	1,10	1,10	1,10
	Sn [m ²]	0,2780	0,2990	0,3200	0,3410	0,3620	0,3830	0,4040	0,4250	0,4460	0,4670
	Sn [%]	79,00	80,00	80,00	80,00	80,00	81,00	81,00	81,00	81,00	81,00
	Q [m ³ /h]	7.414	7.970	8.527	9.083	9.640	10.197	10.754	11.312	11.869	12.427
	Δp [Pa]	4,00	3,90	3,80	3,70	3,60	3,50	3,50	3,40	3,40	3,30
	Q [m ³ /h]	6.302	6.775	7.248	7.721	8.194	8.668	9.141	9.615	10.089	10.563
	Δp [Pa]	2,90	2,80	2,70	2,70	2,60	2,60	2,50	2,50	2,40	2,40
550	Q [m ³ /h]	5.357	5.759	6.161	6.563	6.965	7.368	7.770	8.173	8.576	8.978
	Δp [Pa]	2,10	2,00	2,00	1,90	1,90	1,90	1,80	1,80	1,80	1,70
	Q [m ³ /h]	4.553	4.895	5.237	5.578	5.920	6.262	6.605	6.947	7.289	7.632
	Δp [Pa]	1,50	1,50	1,40	1,40	1,40	1,30	1,30	1,30	1,30	1,30
	Q [m ³ /h]	3.870	4.161	4.451	4.742	5.032	5.323	5.614	5.905	6.196	6.487
	Δp [Pa]	1,10	1,10	1,00	1,00	1,00	1,00	1,00	0,90	0,90	0,90

Hn\Wn [mm]	700	750	800	850	900	950	1000	1050	1100	1150	
550	Sn [m ²]	0,3110	0,3350	0,3580	0,3820	0,4050	0,4290	0,4520	0,4760	0,4990	0,5220
	Sn [%]	81,00	81,00	81,00	82,00	82,00	82,00	82,00	82,00	83,00	
	Q [m ³ /h]	8.292	8.917	9.542	10.167	10.792	11.418	12.044	12.671	13.297	13.924
	Δp [Pa]	3,40	3,30	3,20	3,20	3,10	3,00	3,00	2,90	2,90	2,90
	Q [m ³ /h]	7.048	7.579	8.110	8.642	9.174	9.706	10.238	10.770	11.303	11.835
	Δp [Pa]	2,50	2,40	2,30	2,30	2,20	2,20	2,20	2,10	2,10	2,10
	Q [m ³ /h]	5.991	6.442	6.894	7.346	7.798	8.250	8.702	9.155	9.607	10.060
	Δp [Pa]	1,80	1,70	1,70	1,70	1,60	1,60	1,60	1,50	1,50	1,50
	Q [m ³ /h]	5.093	5.476	5.860	6.244	6.628	7.012	7.397	7.782	8.166	8.551
	Δp [Pa]	1,30	1,30	1,20	1,20	1,20	1,10	1,10	1,10	1,10	1,10
600	Q [m ³ /h]	4.329	4.655	4.981	5.307	5.634	5.961	6.287	6.614	6.941	7.268
	Δp [Pa]	0,90	0,90	0,90	0,90	0,80	0,80	0,80	0,80	0,80	0,80
	Sn [m ²]	0,3450	0,3710	0,3970	0,4220	0,4480	0,4740	0,5000	0,5260	0,5520	0,5780
	Sn [%]	82,00	82,00	83,00	83,00	83,00	83,00	83,00	84,00	84,00	84,00
	Q [m ³ /h]	9.178	9.872	10.566	11.261	11.957	12.653	13.349	14.045	14.742	15.439
	Δp [Pa]	3,00	2,90	2,90	2,80	2,70	2,70	2,60	2,60	2,50	2,50
	Q [m ³ /h]	7.801	8.391	8.982	9.572	10.163	10.755	11.347	11.938	12.531	13.123
	Δp [Pa]	2,20	2,10	2,10	2,00	2,00	1,90	1,90	1,80	1,80	1,80
	Q [m ³ /h]	6.631	7.133	7.634	8.137	8.639	9.142	9.645	10.148	10.651	11.154
	Δp [Pa]	1,60	1,50	1,50	1,50	1,40	1,40	1,40	1,30	1,30	1,30
650	Q [m ³ /h]	5.637	6.063	6.489	6.916	7.343	7.770	8.198	8.626	9.053	9.481
	Δp [Pa]	1,10	1,10	1,10	1,00	1,00	1,00	1,00	1,00	0,90	0,90
	Q [m ³ /h]	4.791	5.153	5.516	5.879	6.242	6.605	6.968	7.332	7.695	8.059
	Δp [Pa]	0,80	0,80	0,80	0,80	0,70	0,70	0,70	0,70	0,70	0,70
	Sn [m ²]	0,3780	0,4060	0,4350	0,4630	0,4920	0,5200	0,5490	0,5770	0,6050	0,6340
	Sn [%]	83,00	83,00	84,00	84,00	84,00	84,00	84,00	85,00	85,00	85,00
	Q [m ³ /h]	10.071	10.835	11.600	12.366	13.132	13.899	14.666	15.433	16.201	16.969
	Δp [Pa]	2,70	2,60	2,50	2,50	2,40	2,40	2,30	2,30	2,20	2,20
	Q [m ³ /h]	8.560	9.210	9.860	10.511	11.162	11.814	12.466	13.119	13.771	14.424
	Δp [Pa]	2,00	1,90	1,80	1,80	1,70	1,70	1,70	1,60	1,60	1,60
700	Q [m ³ /h]	7.276	7.829	8.381	8.935	9.488	10.042	10.596	11.151	11.706	12.260
	Δp [Pa]	1,40	1,40	1,30	1,30	1,30	1,20	1,20	1,20	1,20	1,10
	Q [m ³ /h]	6.185	6.654	7.124	7.594	8.065	8.536	9.007	9.478	9.950	10.421
	Δp [Pa]	1,00	1,00	1,00	0,90	0,90	0,90	0,90	0,90	0,80	0,80
	Q [m ³ /h]	5.257	5.656	6.056	6.455	6.855	7.256	7.656	8.057	8.457	8.858
	Δp [Pa]	0,70	0,70	0,70	0,70	0,70	0,60	0,60	0,60	0,60	0,60

Hn\Wn [mm]	700	750	800	850	900	950	1000	1050	1100	1150	
700	Sn [m ²]	0,4110	0,4420	0,4730	0,5040	0,5350	0,5660	0,5970	0,6280	0,6590	0,6900
	Sn [%]	84,00	84,00	84,00	85,00	85,00	85,00	85,00	86,00	86,00	
	Q [m ³ /h]	10.970	11.806	12.642	13.479	14.317	15.156	15.995	16.834	17.674	18.515
	Δp [Pa]	2,50	2,40	2,30	2,20	2,20	2,10	2,10	2,00	2,00	
	Q [m ³ /h]	9.325	10.035	10.746	11.458	12.170	12.883	13.596	14.309	15.023	15.737
	Δp [Pa]	1,80	1,70	1,70	1,60	1,60	1,50	1,50	1,40	1,40	
	Q [m ³ /h]	7.926	8.530	9.134	9.739	10.344	10.950	11.556	12.163	12.770	13.377
	Δp [Pa]	1,30	1,20	1,20	1,20	1,10	1,10	1,10	1,00	1,00	
	Q [m ³ /h]	6.737	7.250	7.764	8.278	8.793	9.308	9.823	10.339	10.854	11.370
	Δp [Pa]	0,90	0,90	0,90	0,80	0,80	0,80	0,80	0,80	0,80	0,70
750	Q [m ³ /h]	5.727	6.163	6.599	7.037	7.474	7.912	8.350	8.788	9.226	9.665
	Δp [Pa]	0,70	0,60	0,60	0,60	0,60	0,60	0,60	0,50	0,50	
750	Sn [m ²]	0,4440	0,4780	0,5110	0,5450	0,5780	0,6110	0,6450	0,6780	0,7120	0,7450
	Sn [%]	85,00	85,00	85,00	85,00	86,00	86,00	86,00	86,00	86,00	86,00
	Q [m ³ /h]	11.875	12.782	13.691	14.601	15.511	16.422	17.334	18.247	19.159	20.073
	Δp [Pa]	2,30	2,20	2,10	2,00	2,00	1,90	1,90	1,80	1,80	
	Q [m ³ /h]	10.094	10.865	11.637	12.411	13.185	13.959	14.734	15.510	16.286	17.062
	Δp [Pa]	1,60	1,60	1,50	1,50	1,40	1,40	1,40	1,30	1,30	
	Q [m ³ /h]	8.580	9.235	9.892	10.549	11.207	11.865	12.524	13.183	13.843	14.503
	Δp [Pa]	1,20	1,10	1,10	1,10	1,00	1,00	1,00	0,90	0,90	
	Q [m ³ /h]	7.293	7.850	8.408	8.967	9.526	10.086	10.646	11.206	11.767	12.327
	Δp [Pa]	0,90	0,80	0,80	0,80	0,70	0,70	0,70	0,70	0,70	
800	Q [m ³ /h]	6.199	6.673	7.147	7.622	8.097	8.573	9.049	9.525	10.002	10.478
	Δp [Pa]	0,60	0,60	0,60	0,60	0,50	0,50	0,50	0,50	0,50	
	Sn [m ²]	0,4770	0,5130	0,5490	0,5850	0,6210	0,6570	0,6930	0,7290	0,7650	0,8010
	Sn [%]	85,00	86,00	86,00	86,00	86,00	86,00	87,00	87,00	87,00	
	Q [m ³ /h]	12.785	13.765	14.746	15.729	16.713	17.698	18.683	19.669	20.656	21.643
800	Δp [Pa]	2,10	2,00	1,90	1,90	1,80	1,80	1,70	1,70	1,60	
	Q [m ³ /h]	10.867	11.700	12.535	13.370	14.206	15.043	15.881	16.719	17.558	18.397
	Δp [Pa]	1,50	1,40	1,40	1,30	1,30	1,30	1,20	1,20	1,20	
	Q [m ³ /h]	9.237	9.945	10.654	11.364	12.075	12.787	13.499	14.211	14.924	15.637
	Δp [Pa]	1,10	1,00	1,00	1,00	0,90	0,90	0,90	0,90	0,90	
	Q [m ³ /h]	7.852	8.454	9.056	9.660	10.264	10.869	11.474	12.080	12.685	13.292
	Δp [Pa]	0,80	0,80	0,70	0,70	0,70	0,70	0,60	0,60	0,60	
	Q [m ³ /h]	6.674	7.186	7.698	8.211	8.725	9.239	9.753	10.268	10.783	11.298
	Δp [Pa]	0,60	0,50	0,50	0,50	0,50	0,50	0,50	0,40	0,40	
	Q [m ³ /h]	5.500	6.000	6.500	7.000	7.500	8.000	8.500	9.000	9.500	10.000

Selection data

Hn\Wn [mm]	700	750	800	850	900	950	1000	1050	1100	1150	
1000	Sn [m^2]	0,6100	0,6560	0,7020	0,7480	0,7940	0,8400	0,8860	0,9320	0,9780	1,0240
	Sn [%]	87,00	87,00	88,00	88,00	88,00	88,00	89,00	89,00	89,00	89,00
	Q [m^3/h]	16.465	17.742	19.021	20.303	21.586	22.871	24.158	25.445	26.734	28.024
	Δp [Pa]	1,60	1,50	1,50	1,40	1,40	1,30	1,30	1,30	1,20	1,20
	Q [m^3/h]	13.995	15.081	16.168	17.257	18.348	19.441	20.534	21.629	22.724	23.821
	Δp [Pa]	1,20	1,10	1,10	1,00	1,00	1,00	0,90	0,90	0,90	0,90
	Q [m^3/h]	11.896	12.819	13.743	14.669	15.596	16.525	17.454	18.385	19.316	20.248
	Δp [Pa]	0,80	0,80	0,80	0,70	0,70	0,70	0,70	0,70	0,60	0,60
	Q [m^3/h]	10.112	10.896	11.682	12.469	13.257	14.046	14.836	15.627	16.419	17.211
	Δp [Pa]	0,60	0,60	0,60	0,50	0,50	0,50	0,50	0,50	0,50	0,50
200	Q [m^3/h]	8.595	9.262	9.929	10.598	11.268	11.939	12.611	13.283	13.956	14.629
	Δp [Pa]	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,30	0,30	0,30
Hn\Wn [mm]	1200	1250	1300	1350	1400	1450	1500				
200	Sn [m^2]	0,1390	0,1440	0,1500	0,1560	0,1620	0,1680	0,1740			
	Sn [%]	58,00	58,00	58,00	58,00	58,00	58,00	58,00			
	Q [m^3/h]	4.151	4.325	4.500	4.675	4.849	5.024	5.199			45 dB
	Δp [Pa]	25,50	25,40	25,40	25,30	25,20	25,10	25,10			
	Q [m^3/h]	3.528	3.677	3.825	3.974	4.122	4.271	4.419			40 dB
	Δp [Pa]	18,50	18,40	18,30	18,30	18,20	18,10	18,10			
	Q [m^3/h]	2.999	3.125	3.251	3.378	3.504	3.630	3.756			35 dB
	Δp [Pa]	13,30	13,30	13,20	13,20	13,20	13,10	13,10			
	Q [m^3/h]	2.549	2.656	2.764	2.871	2.978	3.085	3.193			30 dB
	Δp [Pa]	9,60	9,60	9,60	9,50	9,50	9,50	9,40			
250	Q [m^3/h]	2.167	2.258	2.349	2.440	2.532	2.623	2.714			25 dB
	Δp [Pa]	7,00	6,90	6,90	6,90	6,90	6,80	6,80			
	Sn [m^2]	0,1970	0,2050	0,2140	0,2220	0,2310	0,2390	0,2470			
	Sn [%]	66,00	66,00	66,00	66,00	66,00	66,00	66,00			
	Q [m^3/h]	5.536	5.770	6.004	6.237	6.471	6.705	6.939			45 dB
250	Δp [Pa]	13,80	13,70	13,60	13,60	13,50	13,50	13,40			
	Q [m^3/h]	4.706	4.904	5.103	5.302	5.501	5.699	5.898			40 dB
	Δp [Pa]	9,90	9,90	9,80	9,80	9,80	9,70	9,70			
	Q [m^3/h]	4.000	4.169	4.338	4.507	4.676	4.845	5.013			35 dB
	Δp [Pa]	7,20	7,10	7,10	7,10	7,00	7,00	7,00			
250	Q [m^3/h]	3.400	3.543	3.687	3.831	3.974	4.118	4.261			30 dB
	Δp [Pa]	5,20	5,20	5,10	5,10	5,10	5,10	5,10			
	Q [m^3/h]	2.890	3.012	3.134	3.256	3.378	3.500	3.622			25 dB
250	Δp [Pa]	3,70	3,70	3,70	3,70	3,70	3,70	3,70			

Hn\Wn [mm]	1200	1250	1300	1350	1400	1450	1500				
300	Sn [m ²]	0,2550	0,2660	0,2770	0,2880	0,2990	0,3100	0,3210			
	Sn [%]	71,00	71,00	71,00	71,00	71,00	71,00	71,00			
	Q [m ³ /h]	6.962	7.258	7.553	7.848	8.143	8.438	8.733			45 dB
	Δp [Pa]	8,90	8,90	8,80	8,80	8,70	8,70	8,70			
	Q [m ³ /h]	5.918	6.169	6.420	6.671	6.922	7.173	7.423			40 dB
	Δp [Pa]	6,50	6,40	6,40	6,30	6,30	6,30	6,30			
	Q [m ³ /h]	5.030	5.244	5.457	5.670	5.883	6.097	6.310			35 dB
	Δp [Pa]	4,70	4,60	4,60	4,60	4,60	4,50	4,50			
	Q [m ³ /h]	4.276	4.457	4.638	4.820	5.001	5.182	5.363			30 dB
	Δp [Pa]	3,40	3,30	3,30	3,30	3,30	3,30	3,30			
350	Q [m ³ /h]	3.635	3.789	3.943	4.097	4.251	4.405	4.559			25 dB
	Δp [Pa]	2,40	2,40	2,40	2,40	2,40	2,40	2,40			
	Sn [m ²]	0,3130	0,3270	0,3400	0,3530	0,3670	0,3800	0,3940			
	Sn [%]	75,00	75,00	75,00	75,00	75,00	75,00	75,00			
	Q [m ³ /h]	8.425	8.783	9.142	9.500	9.859	10.217	10.575			45 dB
	Δp [Pa]	6,40	6,40	6,30	6,30	6,30	6,20	6,20			
	Q [m ³ /h]	7.161	7.466	7.770	8.075	8.380	8.684	8.989			40 dB
	Δp [Pa]	4,70	4,60	4,60	4,60	4,50	4,50	4,50			
	Q [m ³ /h]	6.087	6.346	6.605	6.864	7.123	7.382	7.641			35 dB
	Δp [Pa]	3,40	3,30	3,30	3,30	3,30	3,30	3,20			
400	Q [m ³ /h]	5.174	5.394	5.614	5.834	6.054	6.275	6.495			30 dB
	Δp [Pa]	2,40	2,40	2,40	2,40	2,40	2,40	2,30			
	Q [m ³ /h]	4.398	4.585	4.772	4.959	5.146	5.333	5.521			25 dB
	Δp [Pa]	1,80	1,70	1,70	1,70	1,70	1,70	1,70			
	Sn [m ²]	0,3710	0,3870	0,4030	0,4190	0,4350	0,4510	0,4670			
	Sn [%]	77,00	77,00	78,00	78,00	78,00	78,00	78,00			
	Q [m ³ /h]	9.919	10.342	10.765	11.189	11.612	12.036	12.459			45 dB
	Δp [Pa]	5,00	4,90	4,90	4,80	4,80	4,80	4,70			
	Q [m ³ /h]	8.431	8.791	9.151	9.510	9.870	10.230	10.590			40 dB
	Δp [Pa]	3,60	3,50	3,50	3,50	3,50	3,40	3,40			
450	Q [m ³ /h]	7.166	7.472	7.778	8.084	8.390	8.696	9.002			35 dB
	Δp [Pa]	2,60	2,60	2,50	2,50	2,50	2,50	2,50			
	Q [m ³ /h]	6.091	6.351	6.611	6.871	7.131	7.392	7.652			30 dB
	Δp [Pa]	1,90	1,90	1,80	1,80	1,80	1,80	1,80			
	Q [m ³ /h]	5.178	5.399	5.620	5.841	6.062	6.283	6.504			25 dB
500	Δp [Pa]	1,30	1,30	1,30	1,30	1,30	1,30	1,30			

Hn\Wn [mm]	1200	1250	1300	1350	1400	1450	1500			
450	Sn [m ²]	0,4300	0,4480	0,4660	0,4850	0,5030	0,5220	0,5400		
	Sn [%]	80,00	80,00	80,00	80,00	80,00	80,00	80,00		
	Q [m ³ /h]	11.439	11.929	12.419	12.909	13.399	13.889	14.379		45 dB
	Δp [Pa]	4,00	3,90	3,90	3,90	3,80	3,80	3,80		
	Q [m ³ /h]	9.724	10.140	10.556	10.973	11.389	11.806	12.222		40 dB
	Δp [Pa]	2,90	2,80	2,80	2,80	2,80	2,80	2,70		
	Q [m ³ /h]	8.265	8.619	8.973	9.327	9.681	10.035	10.389		35 dB
	Δp [Pa]	2,10	2,10	2,00	2,00	2,00	2,00	2,00		
	Q [m ³ /h]	7.025	7.326	7.627	7.928	8.229	8.530	8.831		30 dB
	Δp [Pa]	1,50	1,50	1,50	1,50	1,50	1,40	1,40		
500	Q [m ³ /h]	5.972	6.227	6.483	6.739	6.995	7.250	7.506		25 dB
	Δp [Pa]	1,10	1,10	1,10	1,10	1,00	1,00	1,00		
	Sn [m ²]	0,4880	0,5090	0,5300	0,5510	0,5720	0,5920	0,6130		
	Sn [%]	81,00	81,00	81,00	82,00	82,00	82,00	82,00		
	Q [m ³ /h]	12.984	13.542	14.100	14.658	15.216	15.774	16.332		45 dB
	Δp [Pa]	3,30	3,30	3,20	3,20	3,20	3,20	3,10		
	Q [m ³ /h]	11.037	11.511	11.985	12.459	12.933	13.408	13.882		40 dB
	Δp [Pa]	2,40	2,40	2,30	2,30	2,30	2,30	2,30		
	Q [m ³ /h]	9.381	9.784	10.187	10.590	10.994	11.397	11.800		35 dB
	Δp [Pa]	1,70	1,70	1,70	1,70	1,70	1,60	1,60		
550	Q [m ³ /h]	7.974	8.317	8.659	9.002	9.345	9.687	10.030		30 dB
	Δp [Pa]	1,20	1,20	1,20	1,20	1,20	1,20	1,20		
	Q [m ³ /h]	6.778	7.069	7.360	7.652	7.943	8.234	8.526		25 dB
	Δp [Pa]	0,90	0,90	0,90	0,90	0,90	0,90	0,90		
	Sn [m ²]	0,5460	0,5690	0,5930	0,6160	0,6400	0,6630	0,6870		
	Sn [%]	83,00	83,00	83,00	83,00	83,00	83,00	83,00		
	Q [m ³ /h]	14.550	15.177	15.804	16.431	17.059	17.686	18.313		45 dB
	Δp [Pa]	2,80	2,80	2,80	2,70	2,70	2,70	2,70		
	Q [m ³ /h]	12.368	12.901	13.434	13.967	14.500	15.033	15.566		40 dB
	Δp [Pa]	2,00	2,00	2,00	2,00	2,00	1,90	1,90		
600	Q [m ³ /h]	10.513	10.966	11.419	11.872	12.325	12.778	13.231		35 dB
	Δp [Pa]	1,50	1,50	1,40	1,40	1,40	1,40	1,40		
	Q [m ³ /h]	8.936	9.321	9.706	10.091	10.476	10.862	11.247		30 dB
	Δp [Pa]	1,10	1,10	1,00	1,00	1,00	1,00	1,00		
	Q [m ³ /h]	7.596	7.923	8.250	8.578	8.905	9.232	9.560		25 dB
	Δp [Pa]	0,80	0,80	0,80	0,70	0,70	0,70	0,70		

Hn\Wn [mm]	1200	1250	1300	1350	1400	1450	1500				
600	Sn [m ²]	0,6040	0,6300	0,6560	0,6820	0,7080	0,7340	0,7600			
	Sn [%]	84,00	84,00	84,00	84,00	84,00	84,00	84,00			
	Q [m ³ /h]	16.136	16.833	17.530	18.227	18.925	19.623	20.321			45 dB
	Δp [Pa]	2,40	2,40	2,40	2,40	2,30	2,30	2,30			
	Q [m ³ /h]	13.715	14.308	14.901	15.493	16.086	16.679	17.273			40 dB
	Δp [Pa]	1,80	1,70	1,70	1,70	1,70	1,70	1,70			
	Q [m ³ /h]	11.658	12.162	12.666	13.170	13.674	14.178	14.682			35 dB
	Δp [Pa]	1,30	1,30	1,20	1,20	1,20	1,20	1,20			
	Q [m ³ /h]	9.909	10.338	10.766	11.194	11.623	12.051	12.480			30 dB
	Δp [Pa]	0,90	0,90	0,90	0,90	0,90	0,90	0,90			
650	Q [m ³ /h]	8.423	8.787	9.151	9.515	9.879	10.243	10.608			25 dB
	Δp [Pa]	0,70	0,70	0,70	0,60	0,60	0,60	0,60			
	Sn [m ²]	0,6620	0,6910	0,7190	0,7480	0,7760	0,8050	0,8330			
	Sn [%]	85,00	85,00	85,00	85,00	85,00	85,00	85,00			
	Q [m ³ /h]	17.738	18.506	19.275	20.044	20.813	21.582	22.351			45 dB
	Δp [Pa]	2,20	2,10	2,10	2,10	2,10	2,00	2,00			
	Q [m ³ /h]	15.077	15.730	16.384	17.037	17.691	18.345	18.999			40 dB
	Δp [Pa]	1,60	1,50	1,50	1,50	1,50	1,50	1,50			
	Q [m ³ /h]	12.816	13.371	13.926	14.482	15.037	15.593	16.149			35 dB
	Δp [Pa]	1,10	1,10	1,10	1,10	1,10	1,10	1,10			
700	Q [m ³ /h]	10.893	11.365	11.837	12.310	12.782	13.254	13.727			30 dB
	Δp [Pa]	0,80	0,80	0,80	0,80	0,80	0,80	0,80			
	Q [m ³ /h]	9.259	9.661	10.062	10.463	10.865	11.266	11.668			25 dB
	Δp [Pa]	0,60	0,60	0,60	0,60	0,60	0,60	0,50			
	Sn [m ²]	0,7210	0,7510	0,7820	0,8130	0,8440	0,8750	0,9060			
	Sn [%]	86,00	86,00	86,00	86,00	86,00	86,00	86,00			
	Q [m ³ /h]	19.355	20.196	21.037	21.878	22.720	23.562	24.403			45 dB
	Δp [Pa]	1,90	1,90	1,90	1,90	1,80	1,80	1,80			
	Q [m ³ /h]	16.452	17.167	17.882	18.597	19.312	20.027	20.743			40 dB
	Δp [Pa]	1,40	1,40	1,40	1,30	1,30	1,30	1,30			
750	Q [m ³ /h]	13.984	14.592	15.199	15.807	16.415	17.023	17.632			35 dB
	Δp [Pa]	1,00	1,00	1,00	1,00	1,00	0,90	0,90			
	Q [m ³ /h]	11.887	12.403	12.920	13.436	13.953	14.470	14.987			30 dB
	Δp [Pa]	0,70	0,70	0,70	0,70	0,70	0,70	0,70			
	Q [m ³ /h]	10.104	10.543	10.982	11.421	11.860	12.300	12.739			25 dB
	Δp [Pa]	0,50	0,50	0,50	0,50	0,50	0,50	0,50			


Hn\Wn [mm]	1200	1250	1300	1350	1400	1450	1500				
750	Sn [m ²]	0,7790	0,8120	0,8460	0,8790	0,9130	0,9460	0,9790			
	Sn [%]	87,00	87,00	87,00	87,00	87,00	87,00	87,00			
	Q [m ³ /h]	20.987	21.901	22.815	23.730	24.645	25.560	26.475			45 dB
	Δp [Pa]	1,70	1,70	1,70	1,70	1,60	1,60	1,60			
	Q [m ³ /h]	17.839	18.616	19.393	20.170	20.948	21.726	22.504			40 dB
	Δp [Pa]	1,30	1,20	1,20	1,20	1,20	1,20	1,20			
	Q [m ³ /h]	15.163	15.823	16.484	17.145	17.806	18.467	19.129			35 dB
	Δp [Pa]	0,90	0,90	0,90	0,90	0,90	0,90	0,80			
	Q [m ³ /h]	12.889	13.450	14.012	14.573	15.135	15.697	16.259			30 dB
	Δp [Pa]	0,70	0,60	0,60	0,60	0,60	0,60	0,60			
800	Q [m ³ /h]	10.955	11.433	11.910	12.387	12.865	13.343	13.821			25 dB
	Δp [Pa]	0,50	0,50	0,50	0,50	0,40	0,40	0,40			
	Sn [m ²]	0,8370	0,8730	0,9090	0,9450	0,9810	1,0170	1,0530			
	Sn [%]	87,00	87,00	87,00	87,00	88,00	88,00	88,00			
	Q [m ³ /h]	22.631	23.619	24.607	25.596	26.585	27.575	28.565			45 dB
	Δp [Pa]	1,60	1,60	1,50	1,50	1,50	1,50	1,50			
	Q [m ³ /h]	19.236	20.076	20.916	21.757	22.598	23.439	24.280			40 dB
	Δp [Pa]	1,10	1,10	1,10	1,10	1,10	1,10	1,10			
	Q [m ³ /h]	16.351	17.065	17.779	18.494	19.208	19.923	20.638			35 dB
	Δp [Pa]	0,80	0,80	0,80	0,80	0,80	0,80	0,80			
850	Q [m ³ /h]	13.898	14.505	15.112	15.720	16.327	16.935	17.543			30 dB
	Δp [Pa]	0,60	0,60	0,60	0,60	0,60	0,60	0,60			
	Q [m ³ /h]	11.814	12.330	12.846	13.362	13.878	14.395	14.911			25 dB
	Δp [Pa]	0,40	0,40	0,40	0,40	0,40	0,40	0,40			
	Sn [m ²]	0,8950	0,9340	0,9720	1,0100	1,0490	1,0870	1,1260			
	Sn [%]	88,00	88,00	88,00	88,00	88,00	88,00	88,00			
	Q [m ³ /h]	24.287	25.350	26.413	27.477	28.541	29.606	30.671			45 dB
	Δp [Pa]	1,50	1,40	1,40	1,40	1,40	1,40	1,30			
	Q [m ³ /h]	20.644	21.547	22.451	23.355	24.260	25.165	26.070			40 dB
	Δp [Pa]	1,10	1,00	1,00	1,00	1,00	1,00	1,00			
900	Q [m ³ /h]	17.547	18.315	19.084	19.852	20.621	21.390	22.160			35 dB
	Δp [Pa]	0,80	0,70	0,70	0,70	0,70	0,70	0,70			
	Q [m ³ /h]	14.915	15.568	16.221	16.875	17.528	18.182	18.836			30 dB
	Δp [Pa]	0,60	0,50	0,50	0,50	0,50	0,50	0,50			
	Q [m ³ /h]	12.678	13.233	13.788	14.344	14.899	15.455	16.011			25 dB
	Δp [Pa]	0,40	0,40	0,40	0,40	0,40	0,40	0,40			

Hn\Wn [mm]	1200	1250	1300	1350	1400	1450	1500				
900	Sn [m ²]	0,9530	0,9940	1,0350	1,0760	1,1170	1,1580	1,1990			
	Sn [%]	88,00	88,00	88,00	89,00	89,00	89,00	89,00			
	Q [m ³ /h]	25.953	27.092	28.231	29.370	30.511	31.651	32.792			
	Δp [Pa]	1,30	1,30	1,30	1,30	1,30	1,20	1,20			45 dB
	Q [m ³ /h]	22.060	23.028	23.996	24.965	25.934	26.904	27.873			
	Δp [Pa]	1,00	1,00	0,90	0,90	0,90	0,90	0,90			40 dB
	Q [m ³ /h]	18.751	19.574	20.397	21.220	22.044	22.868	23.693			
	Δp [Pa]	0,70	0,70	0,70	0,70	0,70	0,70	0,60			35 dB
	Q [m ³ /h]	15.939	16.638	17.338	18.038	18.738	19.438	20.139			
	Δp [Pa]	0,50	0,50	0,50	0,50	0,50	0,50	0,50			30 dB
950	Q [m ³ /h]	13.548	14.142	14.737	15.332	15.927	16.523	17.118			
	Δp [Pa]	0,40	0,40	0,40	0,30	0,30	0,30	0,30			25 dB
	Sn [m ²]	1,0120	1,0550	1,0980	1,1420	1,1850	1,2290	1,2720			
	Sn [%]	89,00	89,00	89,00	89,00	89,00	89,00	89,00			
	Q [m ³ /h]	27.630	28.844	30.060	31.276	32.493	33.710	34.927			
	Δp [Pa]	1,30	1,20	1,20	1,20	1,20	1,20	1,10			45 dB
	Q [m ³ /h]	23.485	24.518	25.551	26.585	27.619	28.654	29.688			
	Δp [Pa]	0,90	0,90	0,90	0,90	0,80	0,80	0,80			40 dB
	Q [m ³ /h]	19.963	20.840	21.719	22.597	23.476	24.356	25.235			
	Δp [Pa]	0,70	0,60	0,60	0,60	0,60	0,60	0,60			35 dB
1000	Q [m ³ /h]	16.968	17.714	18.461	19.208	19.955	20.702	21.450			
	Δp [Pa]	0,50	0,50	0,50	0,40	0,40	0,40	0,40			30 dB
	Q [m ³ /h]	14.423	15.057	15.692	16.327	16.962	17.597	18.233			
	Δp [Pa]	0,30	0,30	0,30	0,30	0,30	0,30	0,30			25 dB
	Sn [m ²]	1,0700	1,1160	1,1620	1,2080	1,2540	1,2990	1,3450			
	Sn [%]	89,00	89,00	89,00	89,00	90,00	90,00	90,00			
	Q [m ³ /h]	29.315	30.607	31.900	33.193	34.487	35.781	37.076			
	Δp [Pa]	1,20	1,20	1,10	1,10	1,10	1,10	1,10			45 dB
	Q [m ³ /h]	24.918	26.016	27.115	28.214	29.314	30.414	31.515			
	Δp [Pa]	0,80	0,80	0,80	0,80	0,80	0,80	0,80			40 dB
1050	Q [m ³ /h]	21.181	22.114	23.048	23.982	24.917	25.852	26.788			
	Δp [Pa]	0,60	0,60	0,60	0,60	0,60	0,60	0,60			35 dB
	Q [m ³ /h]	18.004	18.797	19.591	20.385	21.180	21.974	22.770			
	Δp [Pa]	0,40	0,40	0,40	0,40	0,40	0,40	0,40			30 dB
	Q [m ³ /h]	15.303	15.978	16.652	17.327	18.003	18.678	19.354			
	Δp [Pa]	0,30	0,30	0,30	0,30	0,30	0,30	0,30			25 dB

Every air flow lower than the above mentioned maximum value, will meet the listed A-weighted sound power level for the respective dimension. More information on sound power can be found in the product information on our website (documents).

Sample order

Sample order

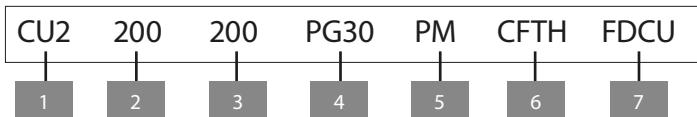

1. product
2. width
3. height
4. frame on the side of the mechanism
5. frame on the side of the wall
6. mechanism type
7. option: unipolar end of range switch

Approvals and certificates

All our dampers are submitted to a number of tests by official test institutes. Reports of these tests form the basis for the approvals of our dampers.



0749-CPR-BC1-606-0464-15650.03-0464&2517



NF 537
CLAPETS RÉSISTANT AU FEU
VOLETS RÉSISTANT AU FEU
www.marque-nf.com

18.12



26813

W-336769-20-Zd



2822-UKCA-CPR-0057

The NF-label guarantees: conformity with the standard NF S 61-937 Parts 1 and 5: "Systèmes de Sécurité Incendie Dispositifs Actionnés de Sécurité"; conformity with the national decree of March 22, 2004, changed on 14 March 2011 for the classification of fire resistance; the values of the characteristics mentioned in this document. Organisme Certificateur: AFNOR Certification, 11 Rue Francis de Pressensé, F93571 La Plaine Saint-Denis Cedex; Website: <http://www.afnor.org> and <http://www.marque-nf.com>; Phone: +33 (0)1.41.62.80.00, Fax: +33 (0)1.49.17.90.00, Email: certification@afnor.org